

FuseHolder Detail Specification

MODEL型号:


570. 571

Spec. 规格


For TR5/TE5 fuse/6.3A250VAC

Holder / No. 570

Panel Mount, for TR5®/TE5® Fuses



Panel alternatives

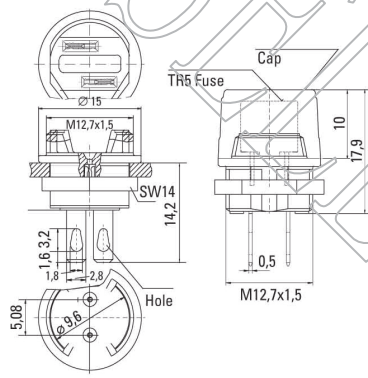

with cap 575 IP40
(only on front side)



Specifications

Packaging
000 bulk (100 pcs.)

Order Number
Holder No. 570 0000 000

Mounting
12.7mm diameter D-hole or double D-hole
Admissible torque on plastic hex nut is 1.2Nm

Terminals
Solderable or 2.8mm quick connect-fits 0.5mm tab


Materials
Holder: Black Thermoplastic, UL 94 V-0
Polyamide PA 6.6
Metal parts: Copper alloy
Solderable tinned

Electrical Data (23°C/without Cap)
Rated Voltage: 250V
Max. Current/Power: 6.3A/2.5W

Minimum Cross Section
Conductor - 2.5mm²

Unit Weight
2.2g

Cap / No. 575



Packaging
000 bulk (100 pcs.)

Order Number
Cap No. 575 0000 000

Plastic Cap
Use with No. 570 or No. 571

Materials
Cap: Transparent Thermoplastic
Polycarbonat PC, UL94 V-0



Unit Weight
0.94g

Holder / No. 571

PC Mount, for TR5®/TE5® Fuses



Holes in PCB

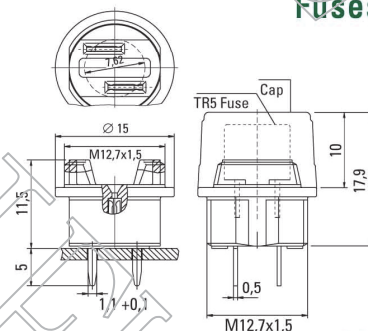

Packaging
000 bulk (100 pcs.)

Order Number
Holder No. 571 0000 000

Mounting
PC Board, 7.62mm hole spacing

Materials
Holder: Black Thermoplastic, UL94 V-0
Polyamide PA 6.6
Metal parts: Copper alloy
Solderable, tinned

Electrical Data (23°C/without Cap)
Rated Voltage: 250V
Max. Current/Power: 6.3A/2.5W

Minimum Cross Section
Conducting path - 0.2mm²

Unit Weight
1.6g

Specifications subject to change without notice

Dongguan Selli Technology and Circuits Protection Co, LTD

Tel: 0769-23067981 Fax: 0769-22602343 WWW.SELLIFUSE.COM sales@sellifuse.com