
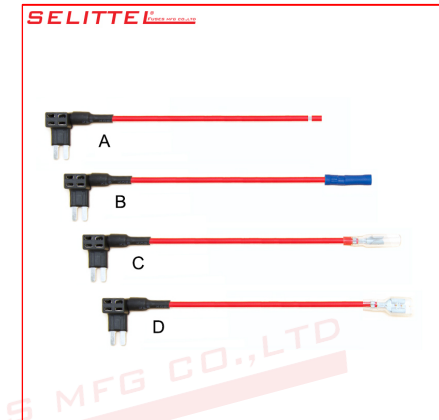


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU TO ANDU ELECTRONICS CO.LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELLER


DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080210-03	ORIGINAL RELEASE		

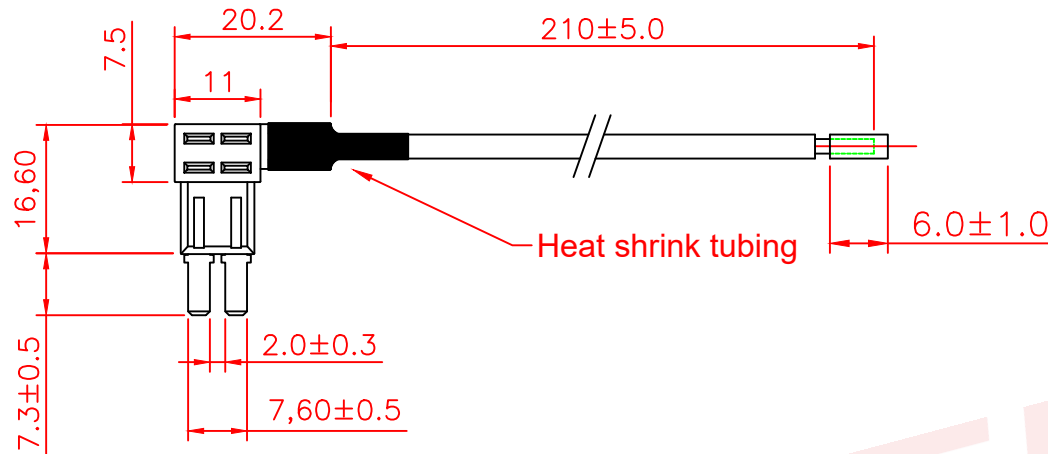

NOTES: UNLESS OTHERWISE SPECIFIED.

1. Applicable: For ATA-N Fuse.
2. Electrical: Rated for current up to 30A.
3. Insulating body: PA,
4. Contact: Brass with Tin plated.
5. With other wire sizes or lengths available on special order.
6. This inline fuseholder designed for turn one slot into two.

5	C-ACU-N	Connectors	1	Brass/PP	Blue
4	W-ACS-N	Wire	1	1015 16AWG	Red
3	H-ACS-N	Heat shrink tubing	1	PVC/PE	Black
2	TC-ACS-N	TERMINAL CONTACT	3	Brass	Tin Plated
1	FH-ACS-N	Body	2	PA	Black
ITEM	P/N	DESCRIPTION	QTY	Material	REMARKS

		东莞市赛力特保险丝制造有限公司 SELITTE FUSES MFG CO., LTD			
RoHS COMPLIANT		FUSEHOLDER			Customer
UNLESS OTHERWISE STATED		FOR ATA			
WALL THICKNESS					
LINEAR		.XX	±0.15	MM	
		.XXX	±0.05	MM	
ANGULAR			±0.5	DEG	
DRAFT ANGLE/SIDE			0.5	°MAX	
BURR & FLASH			0.10	MAX	
BREAK CORNERS			0.20	R.MAX	
PARTING LINE MISMATCH			0.05	MAX	
		DSGN	Tommy Qiu	07-12-08	SCALE free
		DFTS	Tommy Qiu	07-12-08	SHEET 1 OF 1
		CHKD			PART NO.
		APPD			ACA-210-16-R
					REV A