
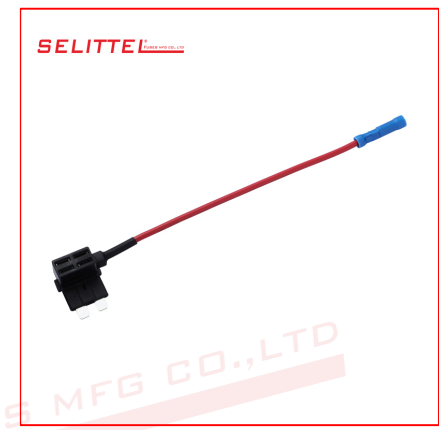


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELLER


DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	2015080833	ORIGINAL RELEASE		

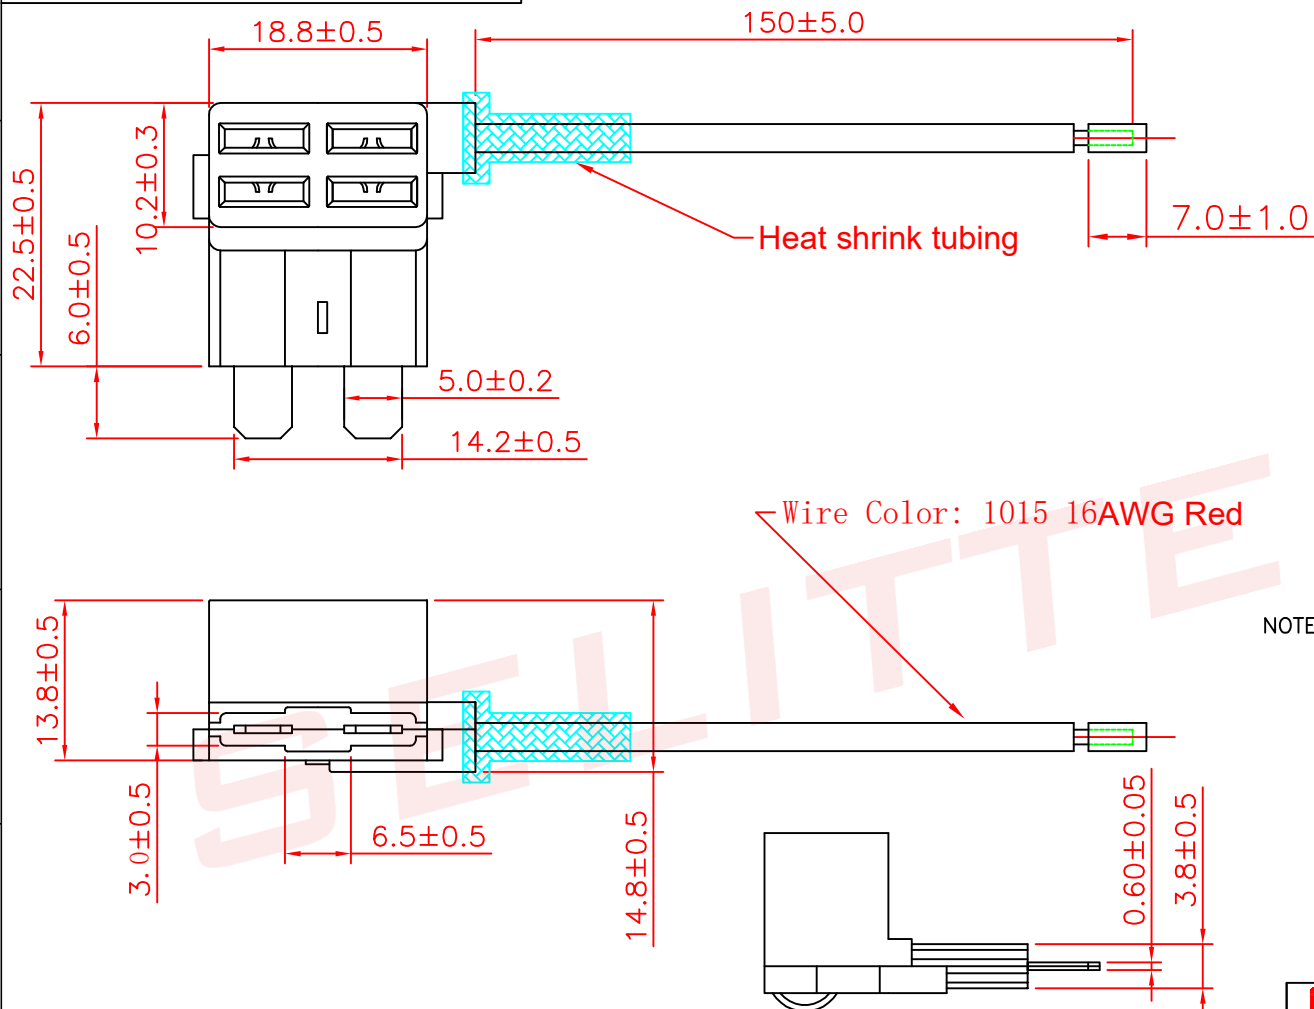

NOTES: UNLESS OTHERWISE SPECIFIED.

1. Applicable: For ATO/ATQ/QTC-N Fuse.
2. Electrical: Rated for current up to 15A.
3. Insulating body: PA,
4. Contact: Brass with Tin plated.
5. With other wire sizes or lengths available on special order.
6. This inline fuseholder designed for turn one slot into two.

5	C-ACU-N	Connectors	1	Brass/PP	Blue
4	W-ACU-N	Wire	1	1015 16AWG	Red
3	H-ACU-N	Heat shrink tubing	1	PVC/PE	Black
2	TC-ACU-N	TERMINAL CONTACT	3	Brass	Tin Plated
1	FH-ACU-N	Body	2	PA	Black
ITEM	P/N	DESCRIPTION	QTY	Material	REMARKS



东莞市赛力特保险丝制造有限公司
SELITTEL FUSES MFG CO., LTD

RoHS COMPLIANT		FUSEHOLDER		Customer	
UNLESS OTHERWISE STATED		FOR ATO/ATC/ATQ			
WALL THICKNESS					
LINEAR	.XX	±0.15			
	.XXX	±0.05			
ANGULAR		±0.5		DEG	
DRAFT ANGLE/SIDE		0.5		°MAX	
BURR & FLASH		0.10		MAX	
BREAK CORNERS		0.20		R.MAX	
PARTING LINE MISMATCH		0.05		MAX	

DSGN Kevin

DFTS Owen

CHKD

APPD

SCALE free

SHEET 1 OF 1

PART NO.

REV A

ACU-150-16-B