




ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF Selitfuse

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080210-011	ORIGINAL RELEASE		

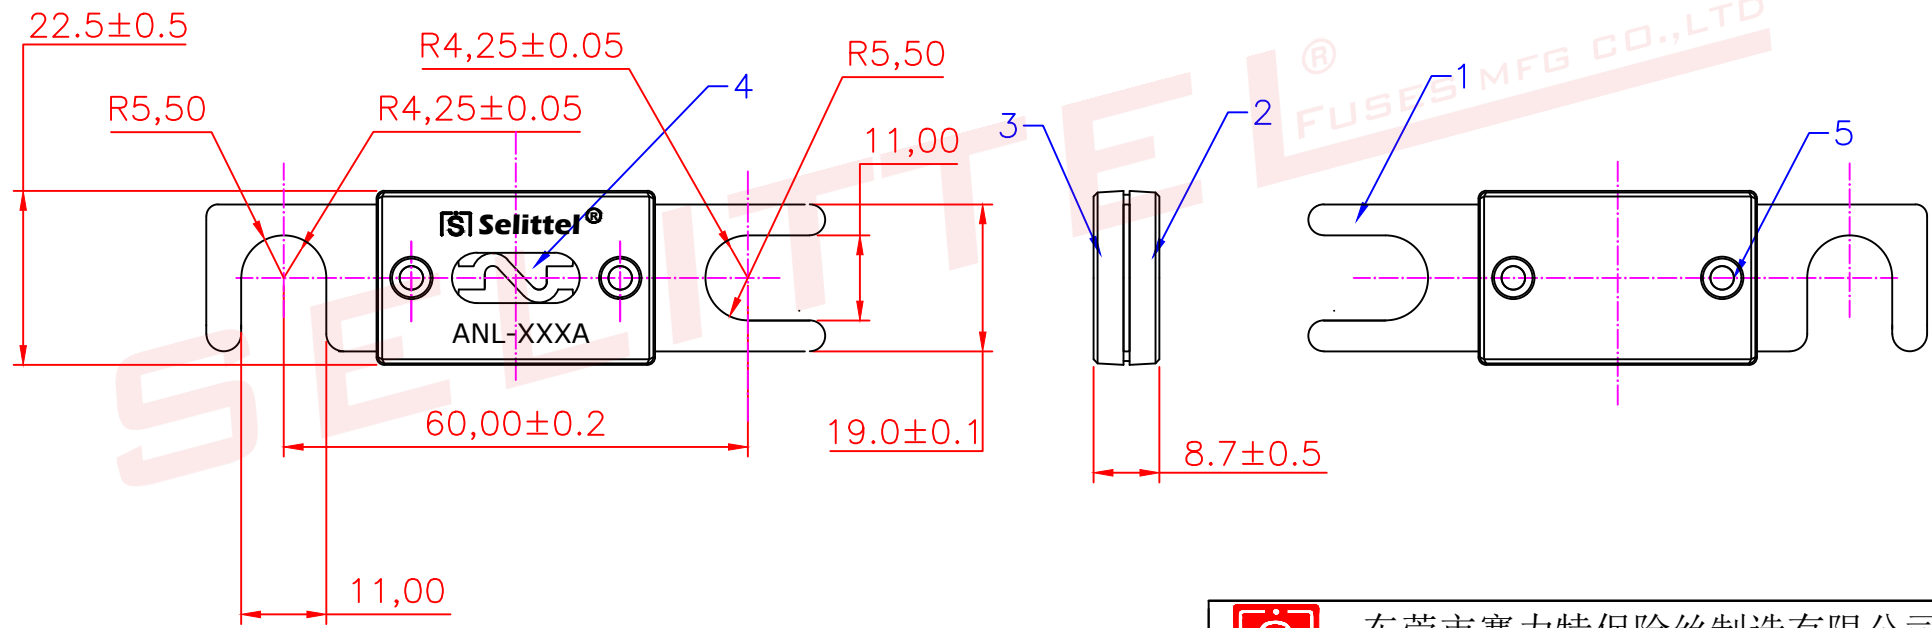


5	CC-8123-N	transparent cover	1	IS-3PC	transparent
4	CC-8122-N	Connector	2	Brass copper	Natural
3	PB-8121-N	PLASTIC COVER	1	bakelite	Black
2	PB-8122-N	PLASTIC BASE	1	bakelite	Black
1	TC-8122-N	TERMINAL CONTACT	1	Alloy	Au/Ni Plates
ITEM	P/N	DESCRIPTION	QTY	Material	REMARKS

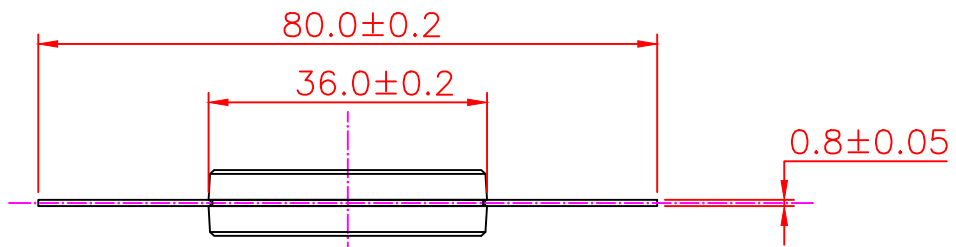

东莞市赛力特保险丝制造有限公司
DONGGUAN SELITTEL FUSES MFG CO., LTD

UNLESS OTHERWISE STATED		Fasten Fuse		CUSTOMER	
WALL THICKNESS		FOR ANL-D			
LINEAR	.XX	MM			
	.XXX	MM			
ANGULAR		DEG			
DRAFT ANGLE/SIDE		°MAX			
BURR & FLASH		MAX			
BREAK CORNERS		R.MAX			
PARTING LINE MISMATCH		MAX			

DSGN	Tommy Qiu	07-12-08	SCALE	free	
DFTS	Tommy Qiu	07-12-08	SHEET	1 OF 2	
CHKD			PART NO.		REV
APPD			SEE THE LIST		A

F

E

D

C

B

A

F

E

D

C

B

A

ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF Selfifuse

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080210-011	ORIGINAL RELEASE		

NOTES: UNLESS OTHERWISE SPECIFIED.

1. the fuses shown are for in motor vehicles, boats and trailers to protect electrical wiring and vehicles.This standard is for the construction shown and is not intended to restrict the design and use of other configurations and materials capable of meeting the vehicle requirements.
2. A fuse is a device designed to interrupt the electrical circuiut when subjected to overcents. This action is to be nonreversible and the fuse is intended to be replaced after the circuit, malfunction has been corrected. capable of meeting the vehicle requirements.

3. Functional Characteristics




TESTING CURRENT	BLOW TIME LIMIT
150% (Rating <225A)	1Hr. minimum
160% (Rating >225A)	6seconds minimum
220%	60seconds Max
250%	0.8sec-10sec
400%	0.2sec-2sec

4. Standard: DIN43560/1;

17	32V/48V/72V	400A	ANL-D-400
16	32V/48V/72V	350A	ANL-D-350
15	32V/48V/72V	300A	ANL-D-300
14	32V/48V/72V	250A	ANL-D-250
13	32V/48V/72V	200A	ANL-D-200
12	32V/48V/72V	175A	ANL-D-175
11	32V/48V/72V	150A	ANL-D-150
10	32V/48V/72V	125A	ANL-D-125
9	32V/48V/72V	100A	ANL-D-100
8	32V/48V/72V	80A	ANL-D-80
7	32V/48V/72V	70A	ANL-D-70
6	32V/48V/72V	60A	ANL-D-60
5	32V/48V/72V	50A	ANL-D-50
4	32V/48V/72V	40A	ANL-D-40
3	32V/48V/72V	35A	ANL-D-35
2	32V/48V/72V	30A	ANL-D-30
1	32V/48V/72V	20A	ANL-D-20
ITEM	Voltage rating	RATING	ASSEMBLY P/N



东莞市赛力特保险丝制造有限公司
DONGGUAN SELITTEL FUSES MFG CO., LTD

			Fasten Fuse					CUSTOMER	
UNLESS OTHERWISE STATED									
WALL THICKNESS			 MM		FOR ANL-D				
LINEAR	.XX	±0.15	MM						
	.XXX	±0.05	MM						
ANGULAR		±0.5	DEG	DSGN	Tommy Qiu	07-12-08	SCALE	free	 
DRAFT ANGLE/SIDE		0.5 °MAX		DFTS	Tommy Qiu	07-12-08	SHEET	2 OF 2	
BURR & FLASH		0.10	MAX	CHKD			PART NO.		REV
BREAK CORNERS		0.20	R.MAX						
PARTING LINE MISMATCH		0.05	MAX	APPD			SEE THE LIST		A