



ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF Selitfuse

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080210-011	ORIGINAL RELEASE		

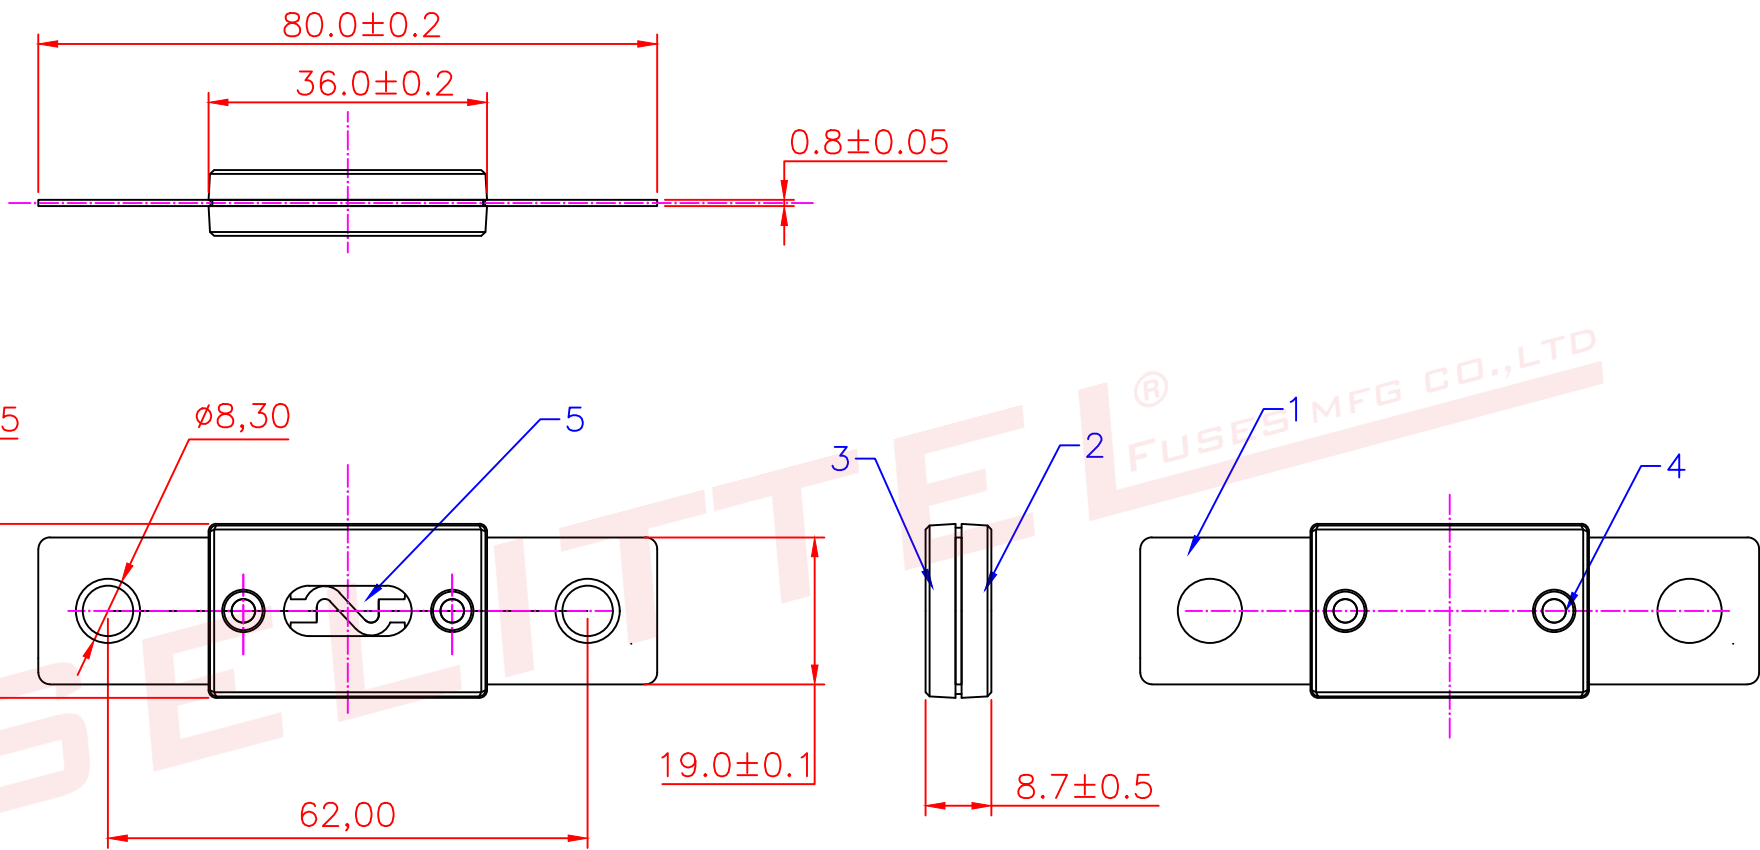

5	CC-8123-N	Transparent cover	1	IS-3PC	Transparent
4	CC-8122-N	Connector	2	Brass copper	Natural
3	PB-8121-N	PLASTIC COVER	1	Bakelite	Black
2	PB-8122-N	PLASTIC BASE	1	Bakelite	Black
1	TC-8122-N	TERMINAL CONTACT	1	Alloy/Brass	Au/Ni Plates
ITEM	P/N	DESCRIPTION	QTY	Material	REMARKS

		东莞市赛力特保险丝制造有限公司			DONGGUAN SELITTEL FUSES MFG CO.,LTD		
UNLESS OTHERWISE STATED		Fasten Fuse				CUSTOMER	
WALL THICKNESS		FOR ANL					
LINEAR	.XX	±0.15	MM	DSGN	Tommy Qiu	07-12-08	SCALE free
	.XXX	±0.05	MM	DFTS	Tommy Qiu	07-12-08	SHEET 1 OF 2
ANGULAR		±0.5	DEG	CHKD			PART NO.
DRAFT ANGLE/SIDE		0.5	°MAX	APPD			REV
BURR & FLASH		0.10	MAX				ANL-E
BREAK CORNERS		0.20	R.MAX				A
PARTING LINE MISMATCH		0.05	MAX				

ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF Sellifuse

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080210-011	ORIGINAL RELEASE		

NOTES: UNLESS OTHERWISE SPECIFIED.

1. the fuses shown are for in motor vehicles, boats and trailers to protect electrical wiring and vehicles.This standard is for the construction shown and is not intended to restrict the design and use of other configurations and materials capable of meeting the vehicle requirements.
2. A fuse is a device designed to interrupt the electrical circuiut when subjected to overcents. This action is to be nonreversible and the fuse is intended to be replaced after the circuit, malfunction has been corrected. capable of meeting the vehicle requirements.

3. Functional Characteristics

TESTING CURRENT	BLOW TIME LIMIT
150% (Rating <225A)	1Hr. minimum
160% (Rating >225A)	6seconds minimum
220%	60seconds Max
250%	0.8sec-10sec
400%	0.2sec-2sec

4. Standard: DIN43560/1;

14	32V	400A	ANL-400
13	32V	350A	ANL-350
12	32V	300A	ANL-300
11	32V	250A	ANL-250
10	32V	200A	ANL-200
9	32V	175A	ANL-175
8	32V	150A	ANL-150
7	32V	125A	ANL-125
6	32V	100A	ANL-100
5	32V	80A	ANL-80
4	32V	70A	ANL-70
3	32V	60A	ANL-60
2	32V	50A	ANL-50
1	32V	40A	ANL-40
ITEM	Voltage rating	RATING	ASSEMBLY P/N



东莞市赛力特保险丝制造有限公司  
DONGGUAN SELITTEL FUSES MFG CO.,LTD

UNLESS OTHERWISE STATED		Fasten Fuse				CUSTOMER	
WALL THICKNESS		FOR ANL					
LINEAR	.XX	MM		DSGN		Tommy Qiu	
	.XXX	MM		07-12-08		SCALE	
ANGULAR		DEG		DFTS		Tommy Qiu	
DRAFT ANGLE/SIDE		°MAX		07-12-08		SHEET	
BURR & FLASH		MAX		CHKD		2 OF 2	
BREAK CORNERS		R.MAX		APPD		PART NO.	
PARTING LINE MISMATCH		MAX				ANL-E	
						REV	
						A	