


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF Selfifuse

DRAWING REVISIONS

REV	S/N	DESCRIPTION	APPROVED	DATE
A	20091210-06	ORIGINAL RELEASE		
B	20191221-01	Changed the hole size		

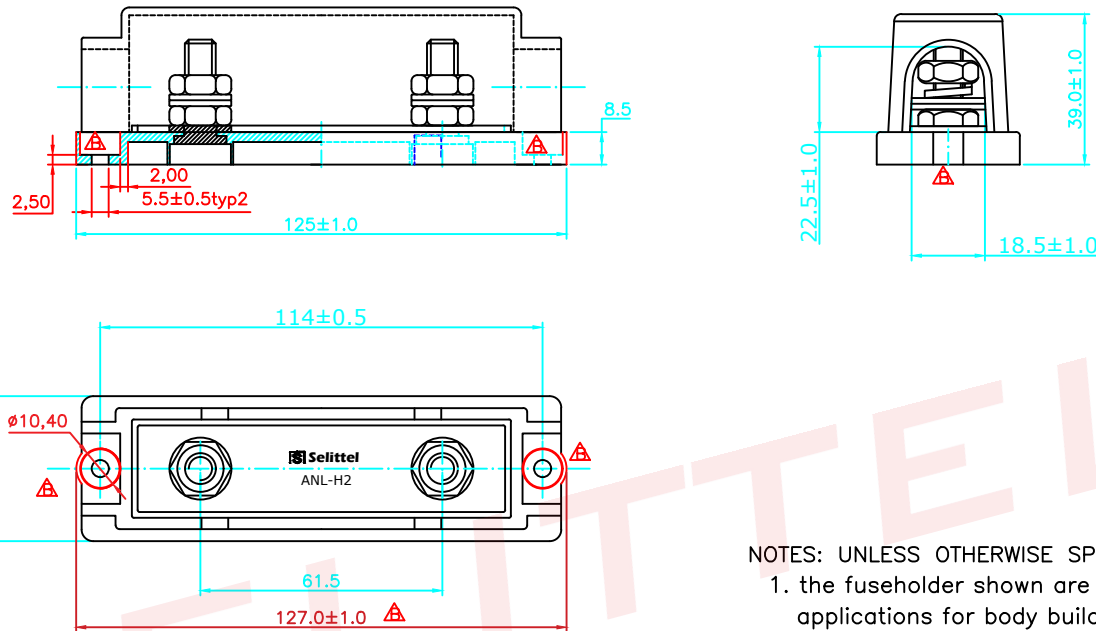

NOTES: UNLESS OTHERWISE SPECIFIED.

- the fuseholder shown are for bolt-on fuse(ANL-B/ANL-C/ANL-E). applications for body builders and medium duty vehicles, for battery and alternator connections and other heavy gauge cables requiring ultra high current protection. Includes protective cover. Includes M8 threaded studs and hex nuts with lock washers, fuse not included.
- rating: DC32V300A; AC220V300A;
- Mounting torque: 5Nm

7	PL-ANL-1	Cover	2	PVC	transparent
6	PL-ANL-1	COVER	1	PC 94V0	transparent
5	DQ-ANL	spacer	4	carbon steel	Imitation-Au plated
4	SP-ANL	Spring	2	carbon steel	Imitation-Au plated
3	NT-ANL	Nut	4	carbon steel	Imitation-Au plated
2	BL-ANL	Bolt	2	carbon steel	Imitation-Au plated
1	PB-ANL	PC BASE	1	PC 94V0	transparent
ITEM	P/N	DESCRIPTION	QTY	Material	REMARKS



东莞市赛力特保险丝制造有限公司
DONGGUAN SELITTEL FUSES MFG CO., LTD

UNLESS OTHERWISE STATED		Fuseholder				CUSTOMER	
WALL THICKNESS		FOR ANL bolt-on Fuse					
LINEAR	.XX	±0.15	MM	DSGN	Tommy	10-12-09	SCALE free
LINEAR	.XXX	±0.05	MM	DFTS	Tommy	10-12-09	SHEET 1 OF 1
ANGULAR		±0.5	DEG	CHKD			PART NO.
DRAFT ANGLE/SIDE	0.5 °MAX			APPD			REV
BURR & FLASH	0.10 MAX						
BREAK CORNERS	0.20 R.MAX						
PARTING LINE MISMATCH	0.05 MAX						
						ANL-H2	
						B	