
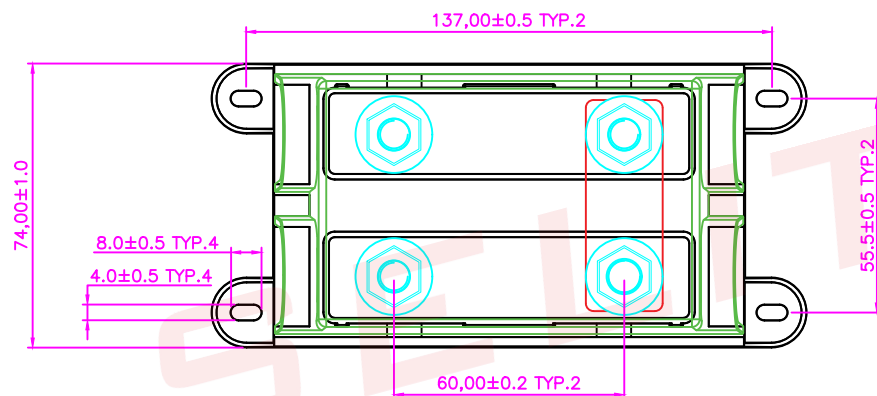
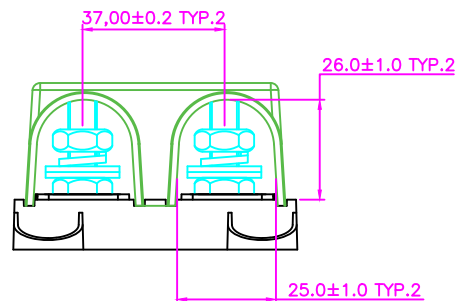


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY AND TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF Sellifuse

DRAWING REVISIONS

REV	S/N	DESCRIPTION	APPROVED	DATE
A	20211110-01	ORIGINAL RELEASE		

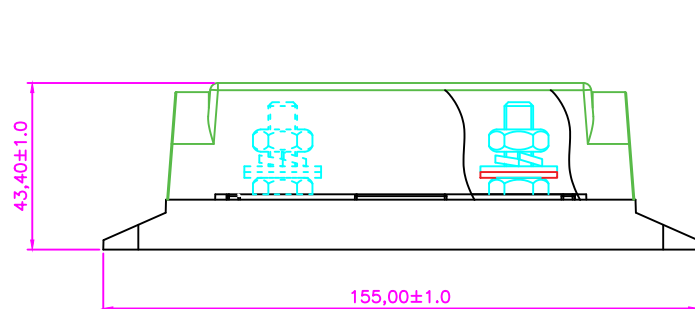

NOTES: UNLESS OTHERWISE SPECIFIED.

- the fuseholder shown are for bolt-on fuse(ANL-B/ANL-C/ANL-E). applications for body builders and medium duty vehicles, for battery and alternator connections and other heavy gauge cables requiring ultra high current protection. Includes protective cover. Includes M8 threaded studs and hex nuts with lock washers, fuse not included.
- It is two-ways fuseholder ;
- Mounting torque: 5Nm
- one-way rating: DC32V300A; AC220V300A;
- Connector is default.

8	L-ANL -1	Connector 55*20*1.5	1	Brass	Tin plated
7	PL-ANL-1	Cover	4	PVC	Black
6	NT-ANL-1	Cover	1	PC 94-V0	transparent Blue
5	DQ-ANL	spacer M8*20	6	304 Stainless steel	Nature
4	SP-ANL	Spring M8	4	304 Stainless steel	Nature
3	NT-ANL	Nut M8	8	304 Stainless steel	Nature
2	BL-ANL	Bolt M8*30	4	304 Stainless steel	Nature
1	PB-ANL	PA BASE	1	PA+GF 94-V0	Black
ITEM	P/N	DESCRIPTION	QTY	Material	REMARKS



东莞市赛力特保险丝制造有限公司
DONGGUAN SELITTEL FUSES MFG CO., LTD

UNLESS OTHERWISE STATED

WALL THICKNESS	MM
.XX	±0.15
LINEAR	MM
.XXX	±0.05
ANGULAR	DEG
	±0.5
DRAFT ANGLE/SIDE	°MAX
BURR & FLASH	0.10
BREAK CORNERS	R.MAX
PARTING LINE MISMATCH	0.05

Two ways Fuseholder
FOR ANL bolt-on Fuse

CUSTOMER

DSGN	Tommy	10-11-21	SCALE	free	
DFTS	Tommy	10-11-21	SHEET	1 OF 1	
CHKD			PART NO.		REV
APPD			ANL-H2R		A