
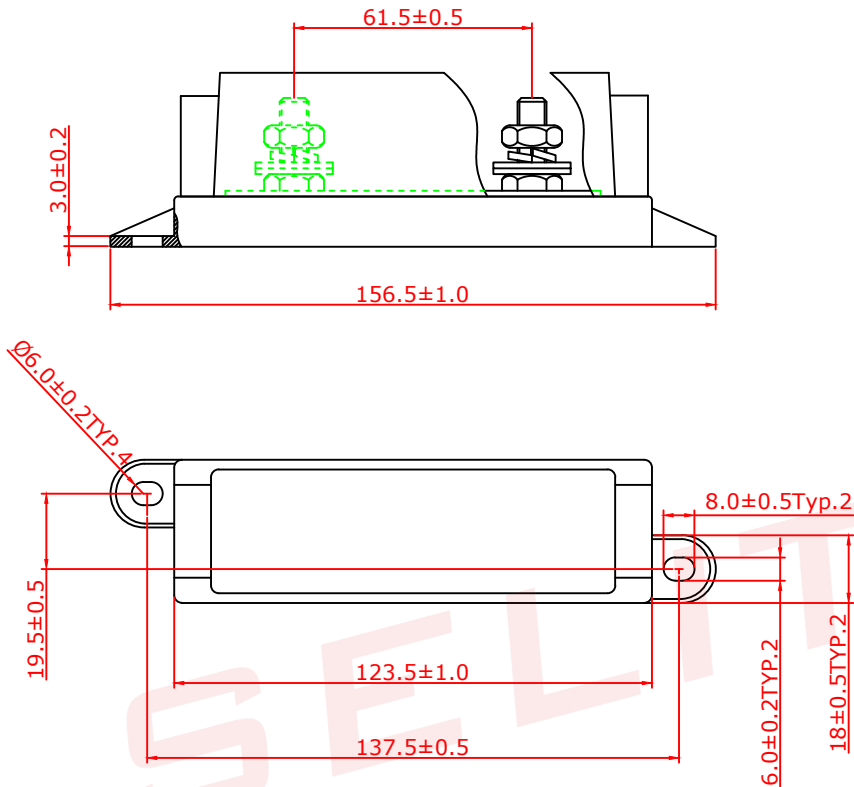


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF Selitell

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20091210-01	ORIGINAL RELEASE		

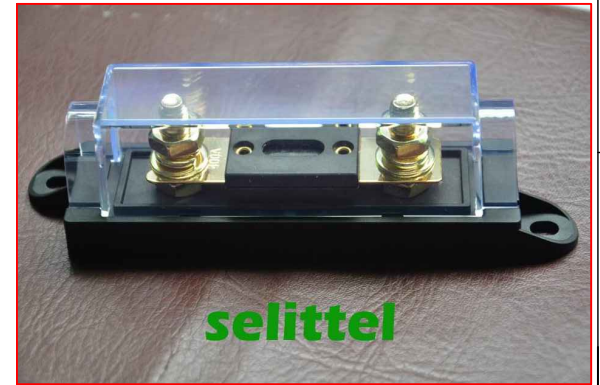

NOTES: UNLESS OTHERWISE SPECIFIED.

- the fuseholder shown are for bolt-on fuse(ANL-B/ANL-C/ANL-E). applications for body builders and medium duty vehicles, for battery and alternator connections and other heavy gauge cables requiring ultra high current protection. Includes protective cover. Includes M8 threaded studs and hex nuts with lock washers, fuse not included.
- rating: DC32V300A; AC220V300A;
- Mounting torque: 5Nm

7	PL-ANL-1	Cover	2	PVC	Black
6	NT-ANL-1	Cover	1	PC 94-V0	transparent
5	DQ-ANL	spacer	4	carbon steel	Imitation-Au/Ni plated
4	SP-ANL	Spring	2	carbon steel	Imitation-Au/Ni plated
3	NT-ANL	Nut	4	carbon steel	Imitation-Au/Ni plated
2	BL-ANL	Bolt	2	carbon steel	Imitation-Au/Ni plated
1	PB-ANL	PA BASE	1	PA+GF 94-V0	Black
ITEM	P/N	DESCRIPTION	QTY	Material	REMARKS



东莞市赛力特保险丝制造有限公司
DONGGUAN SELITTEL FUSES MFG CO., LTD

UNLESS OTHERWISE STATED		Fuseholder				CUSTOMER
WALL THICKNESS		FOR ANL bolt-on Fuse				
LINEAR	.XX	±0.15	MM	DSGN	Tommy	10-12-09
	.XXX	±0.05	MM	SCALE	free	
ANGULAR		±0.5	DEG	DFTS	Tommy	10-12-09
DRAFT ANGLE/SIDE		0.5	°MAX	SHEET	1 OF 1	
BURR & FLASH		0.10	MAX	CHKD		
BREAK CORNERS		0.20	R.MAX	PART NO.		
PARTING LINE MISMATCH		0.05	MAX	APPD		
					ANL-H6	REV A