


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU TO ANDU ELECTRONICS CO.LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF Selfifuse

DRAWING REVISIONS

REV	S/N	DESCRIPTION	APPROVED	DATE
A	20091210-011	ORIGINAL RELEASE		
B	20220922-01	Add the mounting torque		

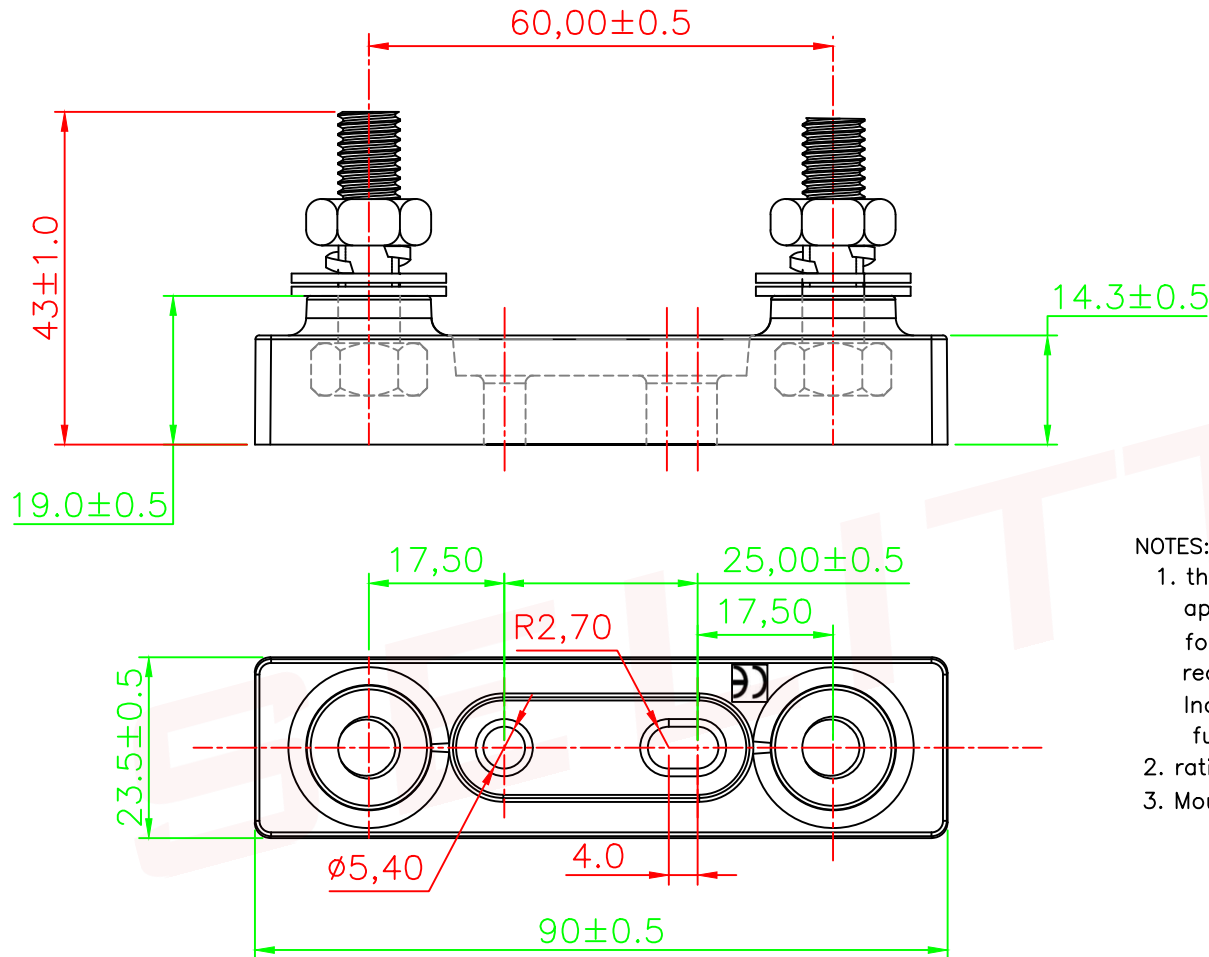

NOTES: UNLESS OTHERWISE SPECIFIED.

- the fuse holder shown are for bolt-on fuse(ANL-B/ANL-C/ANL-E). applications for body builders and medium duty vehicles, for battery and alternator connections and other heavy gauge cables requiring ultra high current protection. Includes protective cover. Includes M8 threaded studs and hex nuts with lock washers, fuse not included.
- rating: DC80V500A; AC220V500A;
- Mounting torque: 35A-63A --- 5Nm $\triangle B$
80A-100A---8Nm
125A-500A---10Nm

5	DQ-ANL	spacer	4	Stainless steel	304
4	SP-ANL	Spring	2	carbon steel	Zn Plated
3	NT-ANL	Nut	2	carbon steel	Zn Plated
2	BL-ANL	Bolt M8X30mm	2	carbon steel	Zn Plated
1	PB-ANL	Bakelite BASE	1	Bakelite	Black
ITEM	P/N	DESCRIPTION	QTY	Material	REMARKS



东莞市赛力特保险丝制造有限公司
DONGGUAN SELITEL FUSES MFG CO., LTD

UNLESS OTHERWISE STATED		Fuseholder				CUSTOMER	
WALL THICKNESS		FOR ANL bolt-on Fuse					
LINEAR	.XX	±0.15	MM	DSGN	Tonny	07-12-09	SCALE free
	.XXX	±0.05	MM	DFTS	Owen	07-12-09	SHEET 1 OF 1
ANGULAR		±0.5	DEG	CHKD			PART NO.
DRAFT ANGLE/SIDE		0.5	°MAX	APPD			REV
BURR & FLASH		0.10	MAX				
BREAK CORNERS		0.20	R.MAX				
PARTING LINE MISMATCH		0.05	MAX				
						ANL-H8-C	
						B	