
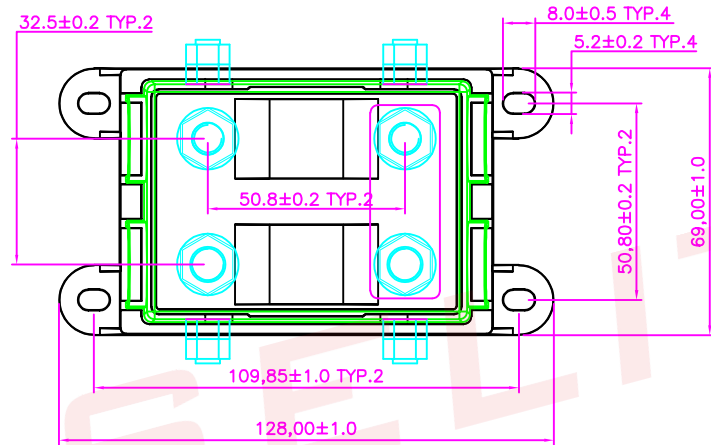
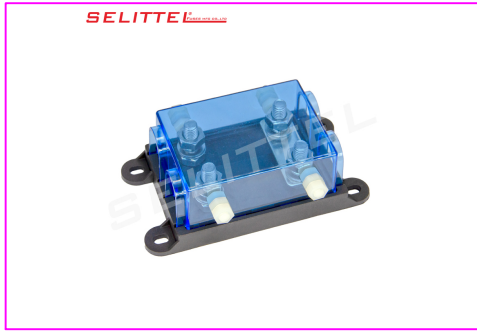



ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF Selitfuse

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20211110-01	ORIGINAL RELEASE		

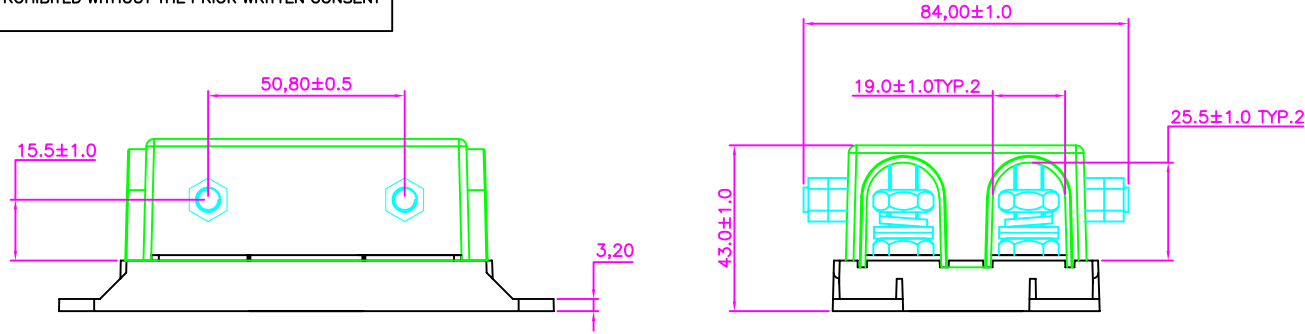

- NOTES: UNLESS OTHERWISE SPECIFIED.
- the fuseholder shown are for bolt-on fuse(ANM). applications for body builders and medium duty vehicles, for battery and alternator connections and other heavy gauge cables requiring ultra high current protection. Includes protective cover. Includes M8 threaded studs and hex nuts with lock washers, fuse not included.
  - It is two-ways fuseholder ;
  - Mounting torque: 5Nm
  - one-way rating: DC32V300A; AC220V300A;
  - Connector is default.

9	M5	Nut/Screw	4sets	PA	
8	L-ANM -1	Connector 18*50*1.5	1	Brass	Tin plated
7	PL-ANM-1	Cover	4	PVC	Black
6	NT-ANM-1	Cover	1	PC 94-V0	transparent Blue
5	DQ-ANM	spacer M8*16	6	304 Stainless steel	Nature
4	SP-ANM	Spring M8	4	304 Stainless steel	Nature
3	NT-ANM	Nut M8	8	304 Stainless steel	Nature
2	BL-ANM	Bolt M8*30	4	304 Stainless steel	Nature
1	PB-ANM	PA BASE	1	PA+GF 94-V0	Black
ITEM	P/N	DESCRIPTION	QTY	Material	REMARKS



东莞市赛力特保险丝制造有限公司  
DONGGUAN SELITTEL FUSES MFG CO., LTD

UNLESS OTHERWISE STATED				Two ways Fuseholder				CUSTOMER	
FOR ANM bolt-on Fuse									
WALL THICKNESS			MM	DSGN	Tommy	10-11-21	SCALE	free	
	LINEAR	.XX	±0.15						
		.XXX	±0.05	DFTS	Tommy	10-11-21	SHEET	1 OF 1	
	ANGULAR		±0.5						
DRAFT ANGLE/SIDE			0.5 °MAX	CHKD			PART NO.		REV
BURR & FLASH			0.10 MAX						
BREAK CORNERS			0.20 R.MAX	APPD					A
PARTING LINE MISMATCH			0.05 MAX						
				ANM-H2RS					