
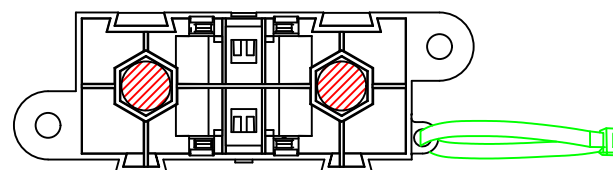
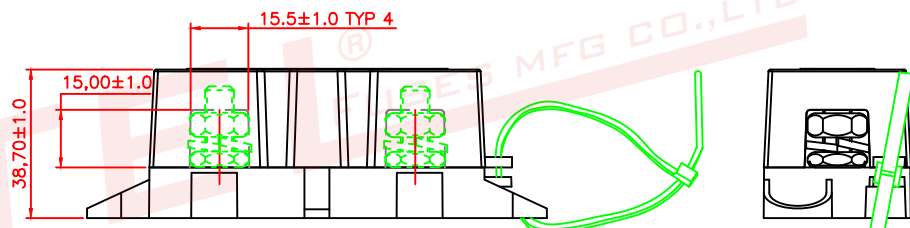
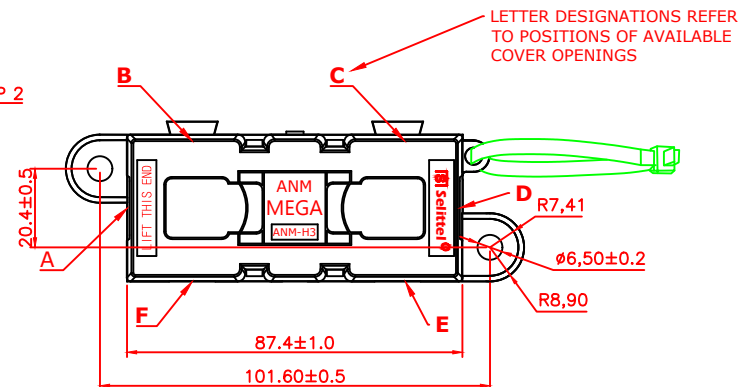



ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY SELITTEL ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY AND TO SELITTEL ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELITTEL

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20091210-011	ORIGINAL RELEASE		

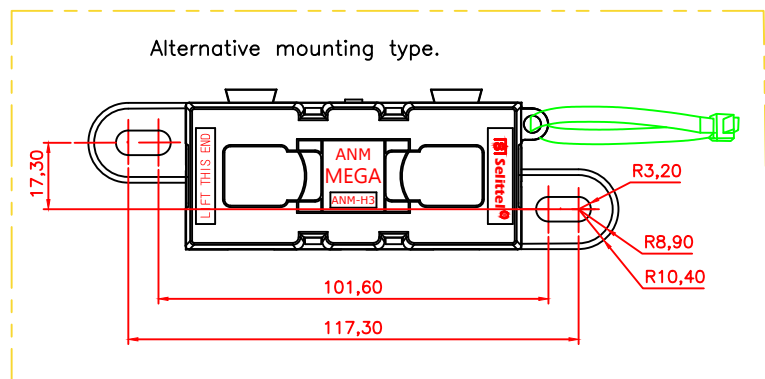


NOTES: UNLESS OTHERWISE SPECIFIED.

- the fuseholder shown are for bolt-on fuse(ANM/MEGA). applications for body builders and medium duty vehicles, for battery and alternator connections and other heavy gauge cables requiring ultra high current protection. Includes protective cover. interlocking pins for connecting multiple blocks to fit your application. block configurations. Includes M8 threaded studs and hex nuts with lock washers, fuse not included.
- rating: DC32V500A; AC220V500A;
- Mounting torque: 5Nm
- Openings of cover can be configurable, display in the A/B/C/D/E/F, default openings is A and D.
- Default mounting distance is 101.6MM and 6.5Ø hole.

ITEM	P/N	DESCRIPTION	QTY	Material	REMARKS
6	PB-ANM-1	Cover	1	PA+GF 94_V0	Black
5	NT-ANM-1	Nut M8 T6.5MM	2	Stainless steel	Nature
4	SP-ANM	Spring 5/16	2	Carbon steel	Zn plated
3	NT-ANM	Nut M8 T4.0MM	2	Stainless steel	Nature
2	BL-ANM	Bolt M8X25	2	Stainless steel	Nature
1	PB-ANM	BASE	1	PA+GF 94_V0	Black



东莞市赛力特保险丝制造有限公司
DONGGUAN SELITTEL FUSES MFG CO., LTD

		Fuseholder					CUSTOMER			
UNLESS OTHERWISE STATED										
WALL THICKNESS		MM		FOR ANM bolt-on Fuse						
LINEAR	.XX	±0.15 MM								
	.XXX	±0.05 MM								
ANGULAR		±0.5 DEG		DSGN	Tommy	07-12-09	SCALE	free		
DRAFT ANGLE/SIDE		0.5 °MAX		DFTS	Tommy	07-12-09	SHEET	1 OF 1		
BURR & FLASH		0.10 MAX		CHKD			PART NO.			REV
BREAK CORNERS		0.20 R.MAX					ANM-H3			A
PARTING LINE MISMATCH		0.05 MAX		APPD						