

ANS Bolt-on-Fuses SPECIFICATION



Hongkong Selittel Electronic Co., Limited

Dongguan Selittel Fuses MFG. Co., Ltd

Add: Jinyinling industrial park, Hengkeng, Liaobu town, Dongguan city

Tel: 0769-83218762, 22498696, 23067981

Fax: 0769-22602343

Email: Tommyq@sellifuse.com

Web: <http://www.sellifuse.com>

一，产品用途/product Application

本系列保险丝用于各种中大功率电气线路的过载和短路保护，比如汽车空调，摩托车，电动车的电路保护。本保险丝可以直接与母线连接省去一个保险丝底座，也可以将保险丝安装于固定好的保险丝底座上，比如我司的 **ANS-/ANF-H/ANG-H** 等底座。这样方便拆卸换保险丝。改变接口尺寸和形状可以满足不同客户的特殊需要。

the fuses shown are for in motor vehicles, automobile air-conditioning system, Electric Vehicle to protect electrical wiring and vehicles. This standard is for the construction shown and is not intended to restrict the design and use of other configurations and materials capable of meeting the vehicle requirements. You can use our fuseholder **ANS-H, ANF-H, ANG-H** to being instanded.

二，产品特性/Product Feature

1，当被保护电路发生异常或短路或过载严重时，本保险丝将会及时熔断，达到保护被保护电气电路的目的，熔断后不可恢复，需要更换新保险丝继续工作。

A fuse offers a bolt-on space saving fuse for high current wiring protection. This action is to be nonreversible and the fuse is intended to be replaced after the circuit malfunction has been corrected.

2，熔断能力 Interrupting Rating: 1000A @ 32 VDC

3，额定电压 Voltage Rating: Below 32 VDC

- 4, 工作温度 Operating Temperature Range: -40°C to $+125^{\circ}\text{C}$
- 5, 壳体材料 Housing Material: PC
- 6, 熔断金属 Terminal: Ni plated Zn
- 7, 安装扭力 Mounting Torque M5: $4.5\text{ Nm} \pm 1\text{Nm}$
- 8, 安装扭力 Mounting Torque M6: $6.0\text{ Nm} \pm 1\text{Nm}$
- 9, 壳体可选印电流 Case can be printed the current code

三, 熔断特性/ Functional Characteristics

测试电流 Test Current	Opening Time 30A~125A 熔断时间 30A-125A 规格		Opening Time 150A~200A 熔断时间 150A-200A 规格	
	Min.	Max.	Min.	Max.
100%	100 hrs.	---	---	---
110%	4 hrs.	---	---	---
150%	90 s	3,600 s	---	---
200%	3 s	100 s	1 s	15 s
300%	0.3 s	3 s	---	---
350%	---	---	0.3 s	5 s
500%	0.1 s	1 s	---	---

备注: 根据使用条件的不同, 以上特性也会相应的变化。

Remark: Characteristics of fuses according to use conditions may change.

四， 产品适应标准/ Complies Standard

ISO 8820-5:2003,


UL 248 Special Purpose Fuses

五， 产品壳体颜色对照表/Case color/current rating list


Assembly P/N	Case color	Cold resistance $R \pm 10\% m \Omega$	Current & Voltage Rating
ANS-023	Clear	2.2	23A32V
ANS-030	Orange	1.7	30A32V
ANS-040	Green	1.25	40A32V
ANS-050	Red	0.9	50A32V
ANS-060	Yellow	0.6	60A32V
ANS-070	Brown	0.55	70A32V
ANS-080	Clear	0.5	80A32V
ANS-100	Blue	0.45	100A32V
ANS-125	Pink	0.35	125A32V
ANS-150	Grey	0.25	150A32V
ANS-175	Brown	0.22	175A32V
ANS-200	Black	0.2	200A32V

六、产品

时间-电流特性曲线
Time-Current Characteristic Curves

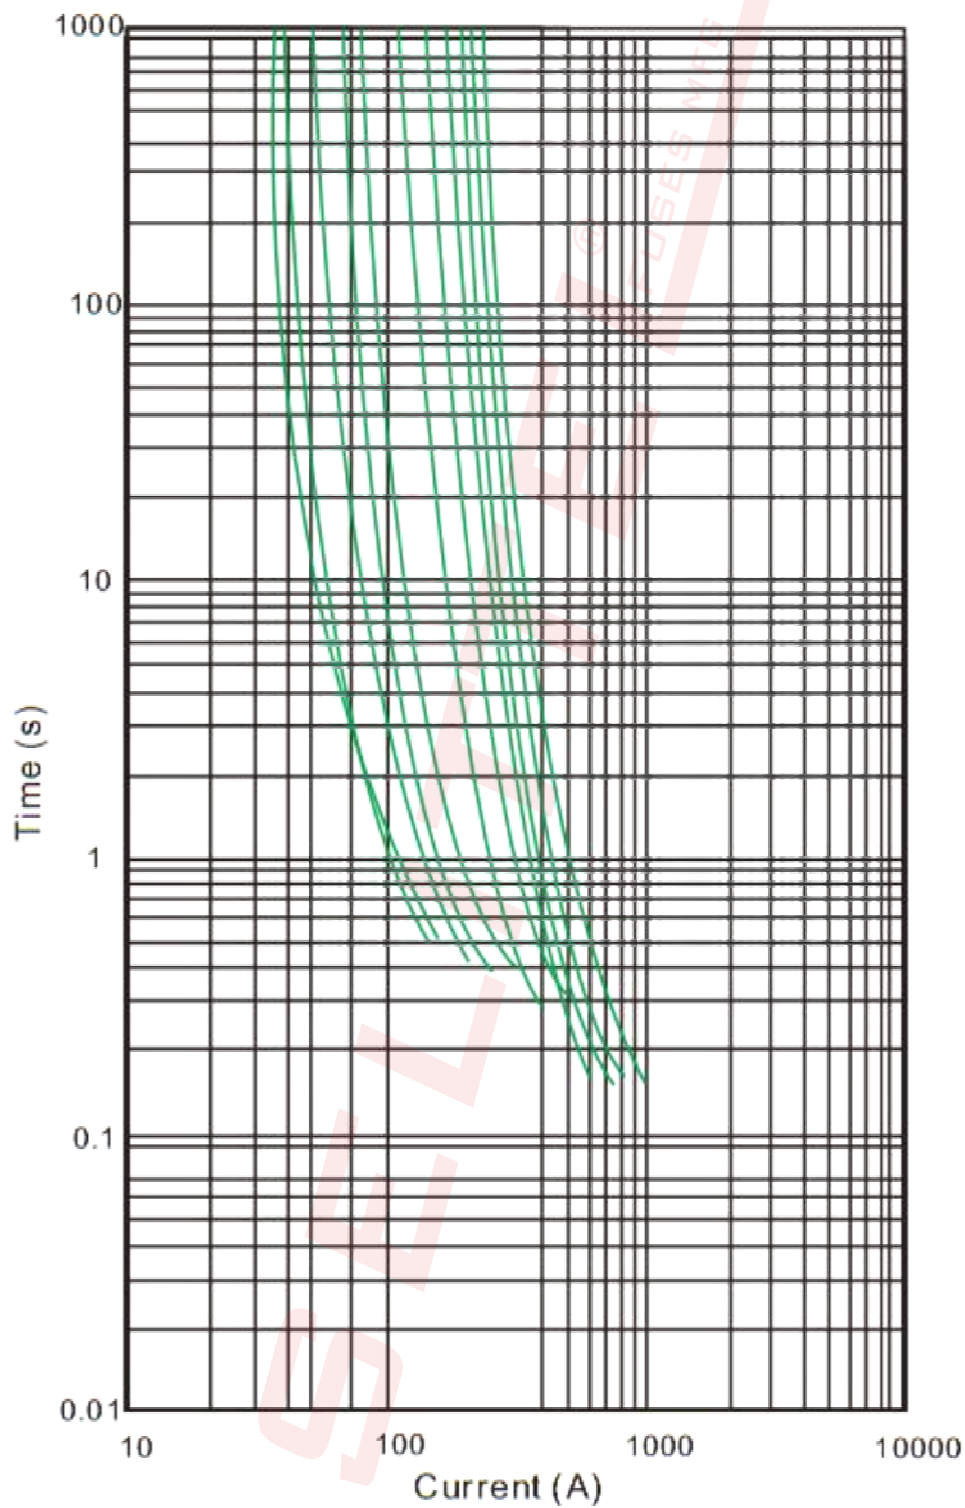

六， 产品尺寸图/Size drawing

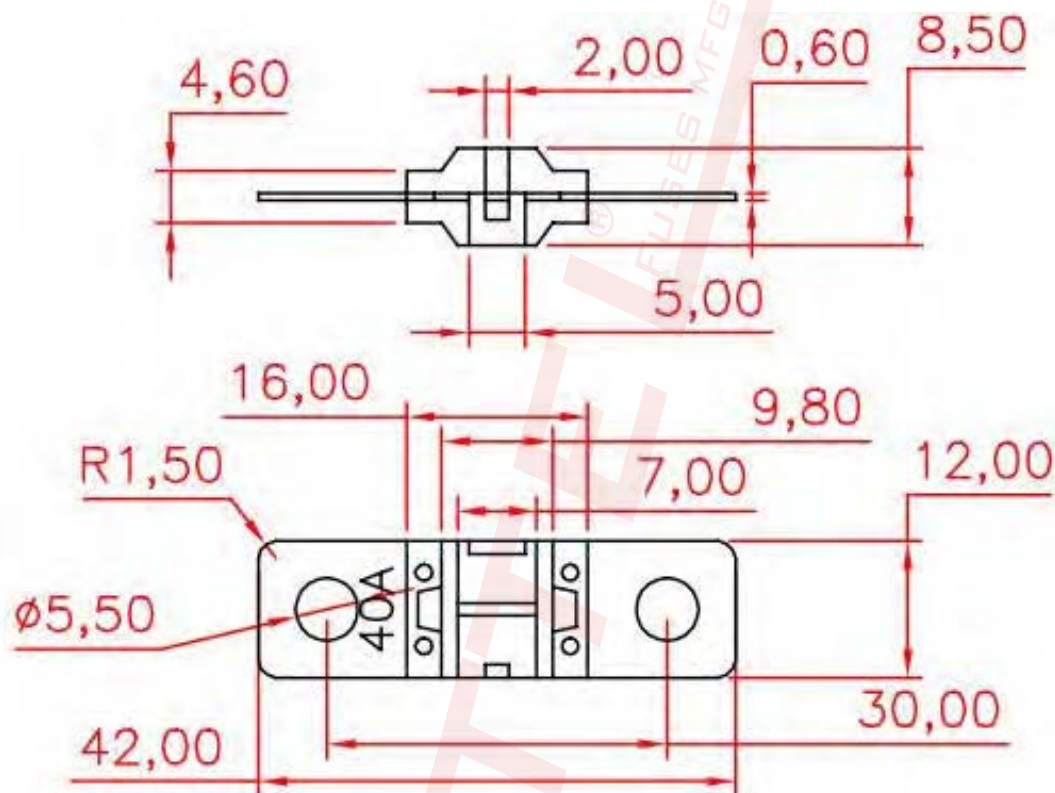

八， 包装/packing

100PCS/Bag

100 个装一个胶袋

500PCS/small box

500 个一小盒

4000PCS/Carton

4000 个一箱

