



ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF ANDU ELECTRONICS CO.,LTD.

Bottom

Assmebly

DRAWING REVISIONS

REV	S/N	DESCRIPTION	APPROVED	DATE
A	20070823-1	ORIGINAL RELEASE		

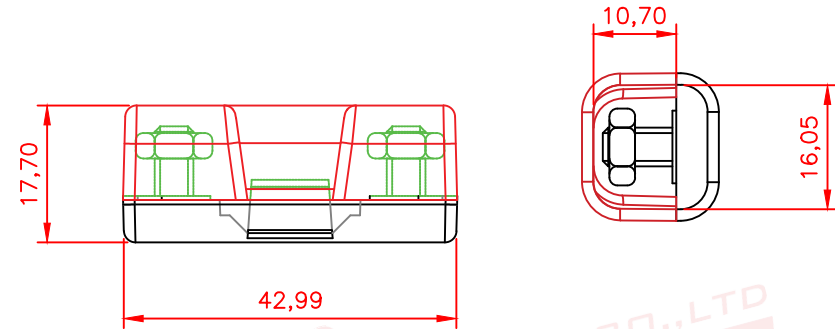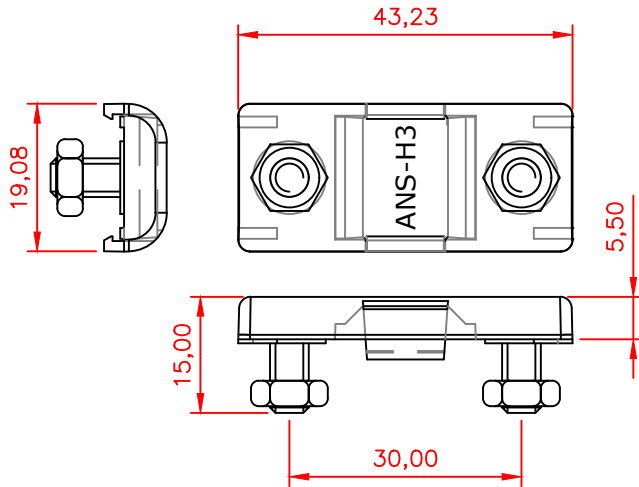

Cover

NOTES: UNLESS OTHERWISE SPECIFIED.

1. material:

A, Contact: Nut: Steel 304

Stud: Carbon Steel Zn plated

B, body: PA 94-V0;

C, cover: PA 94-V0;


2. removed burrs and sharp edge.

3. For ANF、ANG、ANS fuse.

4. Suitable rated current: 32VDC 100A.

5. RoHS COMPLIANT.

6. Mounting torque: 4.5Nm

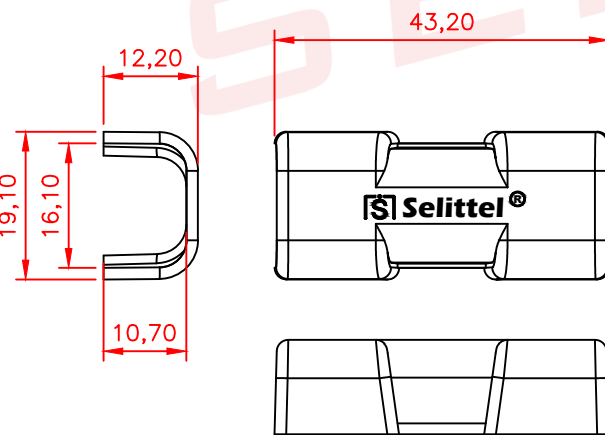

东莞市赛力特保险丝制造有限公司  
DONGGUAN SELITTEL FUSES MFG CO., LTD

RoHS COMPLIANT

UNLESS OTHERWISE STATED

WALL THICKNESS		MM
LINEAR	.XX	±0.15
	.XXX	±0.05
ANGULAR		±0.5 DEG
DRAFT ANGLE/SIDE		0.5 °MAX
BURR & FLASH		0.10 MAX
BREAK CORNERS		0.20 R.MAX
PARTING LINE MISMATCH		0.05 MAX

FUSEHOLDER

FOR ANS ANF ANG

DSGN	Tommy Qiu	07-12-08	SCALE	free	
DFTS	Tommy Qiu	07-12-08	SHEET	1 OF 1	
CHKD			PART NO.		REV
APPD					A

ANS-H3