

F

E

D

C

B

A

F

E

D


C

B



A

12345678

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20191210-011	ORIGINAL RELEASE		

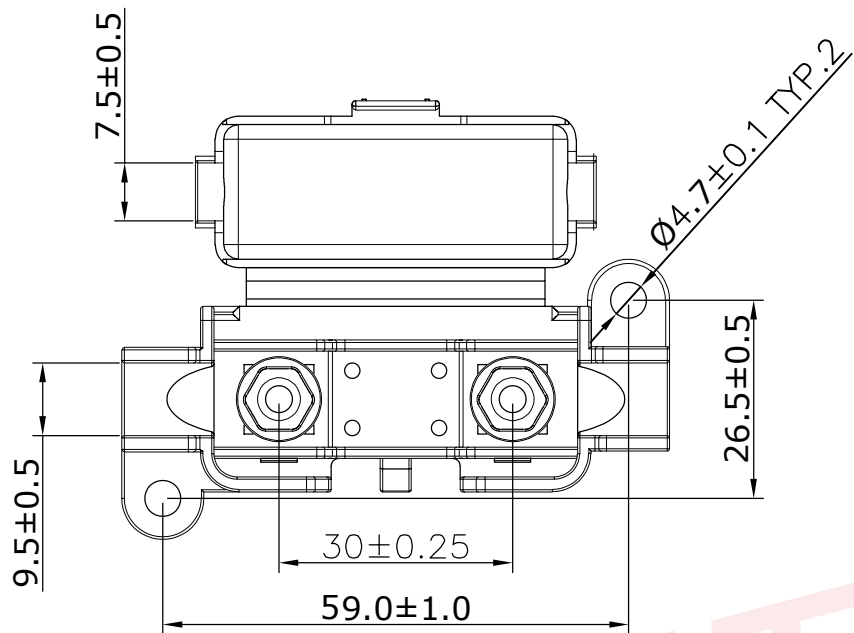

Assmebly

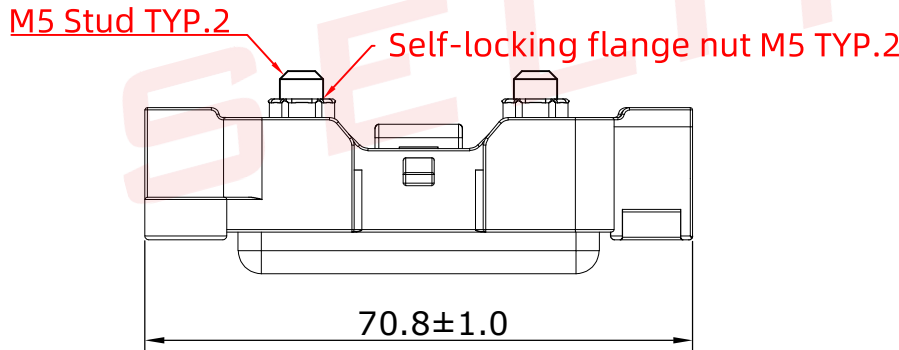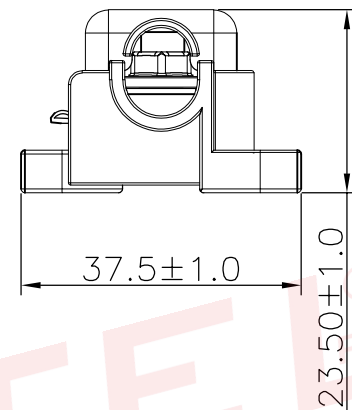

NOTES: UNLESS OTHERWISE SPECIFIED.

A, Contact: Steel 304

B, Contact: Carbon Steel

C, Body: PA66 94-V0

2. removed burrs and sharp edge.

3. For ANF、ANG、ANS fuse.

4. Suitable rated current: 100A80VDC Max.

5. RoHS COMPLIANT.

6. Mounting torque: 4.5Nm



东莞市赛力特保险丝制造有限公司
DONGGUAN SELITTEL FUSES MFG CO., LTD

3	NT-ANS-H	Nut M5	2	304 Stainless steel	
2	BL-ANS-H9	Bolt M5	2	Carbon steel	Zn plated
1	PB-ANS-H9	Case	1	PA66 94-V0	Black
ITEM	P/N	DESCRIPTION	QTY	Material	REMARKS

				Fuseholder					CUSTOMER	
UNLESS OTHERWISE STATED										
WALL THICKNESS		 MM		FOR ANS bolt-on Fuse						
LINEAR	.XX	±0.15 MM		DSGN	Tommy	07-12-19	SCALE	free		
	.XXX	±0.05 MM								
ANGULAR		±0.5 DEG		DFTS	Owen	07-12-19	SHEET	1 OF 2		
DRAFT ANGLE/SIDE		0.5 °MAX		CHKD			PART NO.			REV
BURR & FLASH		0.10 MAX		APPD			ANS-H9		A	
BREAK CORNERS		0.20 R.MAX								
PARTING LINE MISMATCH		0.05 MAX								