



產品規格承認書

SPECIFICATION FOR APPROVAL

客戶名稱 C U S T O M E R	
產品名稱 P R O D U C T N A M E	Blade fuse
型號規格 M O D E L D E T A I L	ATA (MICRO2)
承認日期 A P P R O V A L D A T E	


編制	經理	業務
PREPARED	MANAGER	OPERATION
姚本发	谢德贵	

承認	審核	批准
SIGNATURE	CHECKED BY	APPROVAL BY

備註:承認簽章後請回復一份承認書(或影本)給我們,其餘的您們留作存檔。如果在簽章的承認(或影本)回復給我們之前,下了有關此零件的訂單且又無特別說明,那麼我們就確定您們已完全承認了。

Please return one specification or one copy of it with your chop and signature of approval and retain the others for your record. In the event of an order being placed for this part number before the chop and signed with specification (or copy) is returned and without special explanation, it will be assumed that full approval have been given.

尺寸:

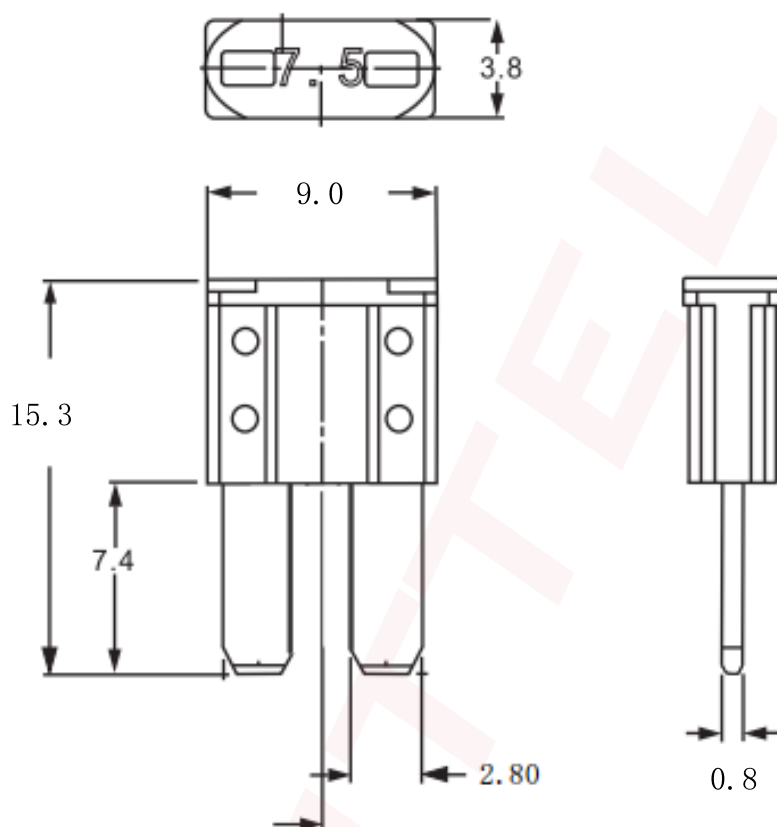

尺寸单位: mm, 误差 ± 0.2 mm





东莞市赛力特保险丝制造有限公司

DONGGUAN SELITTEL FUSES MFG CO., LTD

颜色:

Part Number	Ampere	Voltage	Color
ATA-5	5A	32	orange
ATA-7.5	7.5		Deep Red
ATA-10	10		Red
ATA-15	15		blue
ATA-20	20		yellow
ATA-25	25		white
ATA-30	30		Green

熔断特性:

Rating	Blow Time
110%	100 Hours, Minimum
135%	0.75 to 600 seconds
200%	0.15 to 5 seconds

其他信息:

Fast Acting, Low Voltage For UP To 32V DC.

快速熔断, 适用于低直流电压 32V 以下

Material: 1.Body: Zine Alloy Strip.

2.Metal: PA66

材质: 1. 金属: 锌合金

2. 外壳: PA66 尼龙