


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY SELLI ELECTRONICS CO.LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY AND TO SELLI ELECTRONICS CO.LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELLI

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	2016062120	ORIGINAL RELEASE		



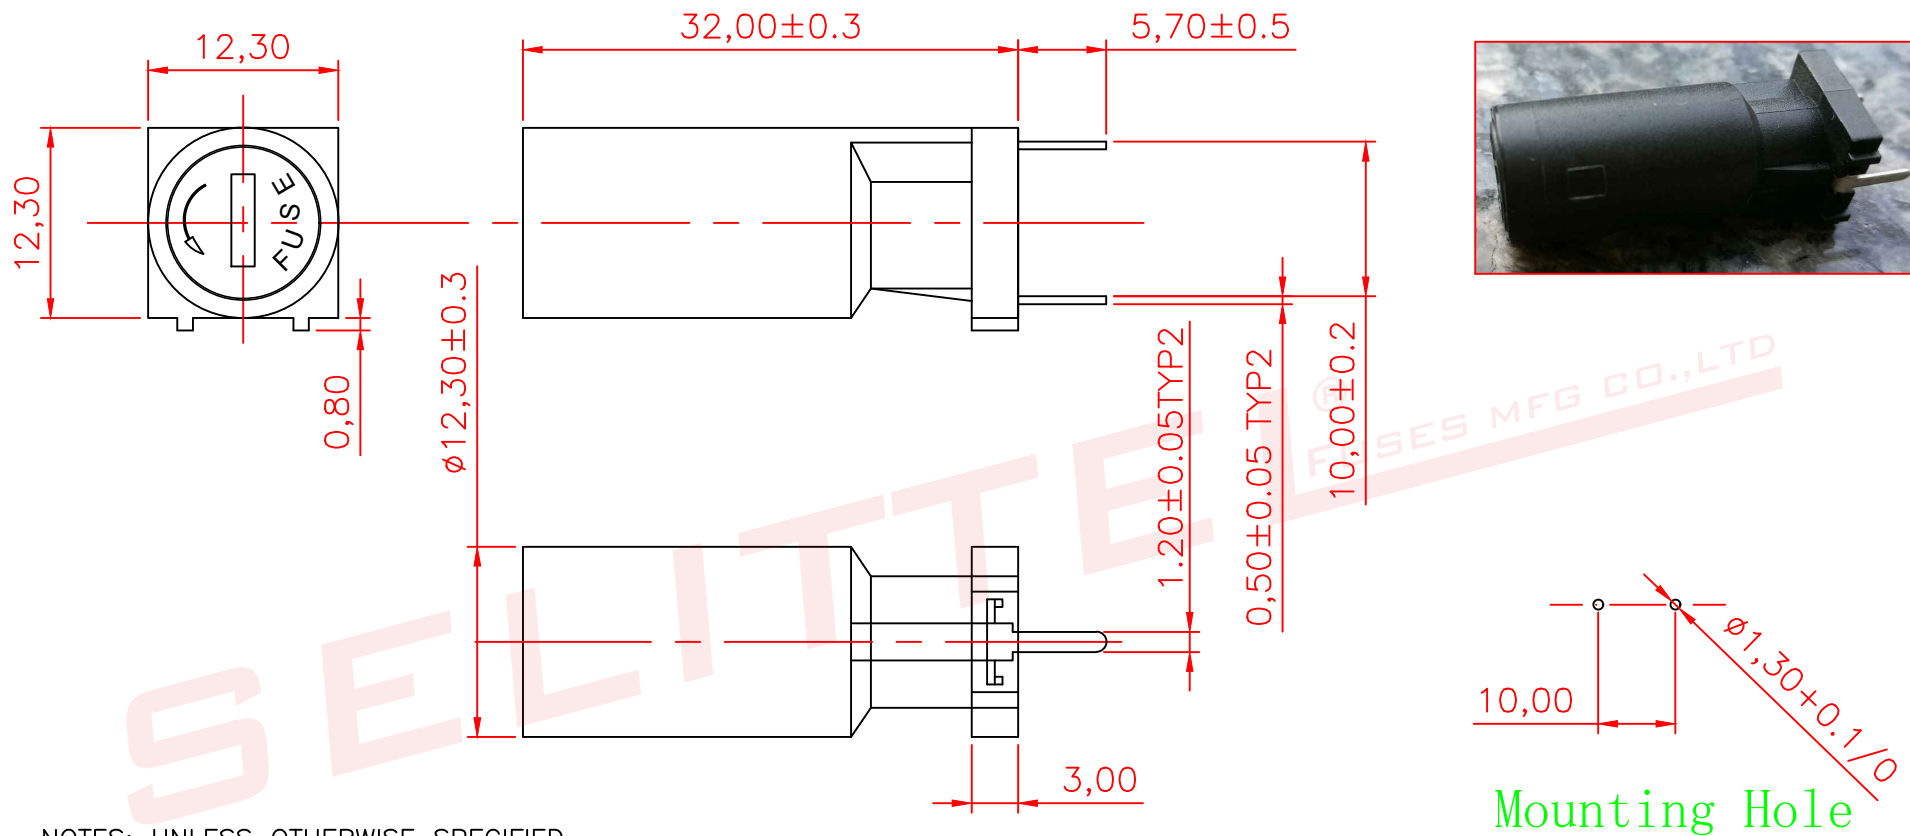


NOTES: UNLESS OTHERWISE SPECIFIED.

1. Applicable: For 5x20mm Fuse.
2. Electrical: Rated for current up to 10A250VAC;
3. Insulating Base body: PBT; Cap: PBT
4. Bayonet type cap; PC Board mount terminal;
5. Terminals: Brass with Tin-plated solderable type.
6. UL VDE CE CQC;




东莞市赛力特保险丝制造有限公司
DONGGUAN SELITTEL FUSES MFG CO., LTD

RoHS COMPLIANT				PCB Mount Fuseholder FOR 5x20mm fuse				CUSTOMER	
UNLESS OTHERWISE STATED									
WALL THICKNESS		 MM							
LINEAR	.XX	±0.15 MM							
	.XXX	±0.05 MM							
ANGULAR		±0.5 DEG		DSGN	Tom	12-22-08	SCALE	free	
DRAFT ANGLE/SIDE		0.5 °MAX		DFTS	TOM	12-22-08	SHEET	1 OF 1	
BURR & FLASH		0.10 MAX		CHKD			PART NO.		REV
BREAK CORNERS		0.20 R.MAX		APPD			H3-56A		A
PARTING LINE MISMATCH		0.05 MAX							

ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY SELLI ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY AND TO SELLI ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELLI

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	2016062120	ORIGINAL RELEASE		

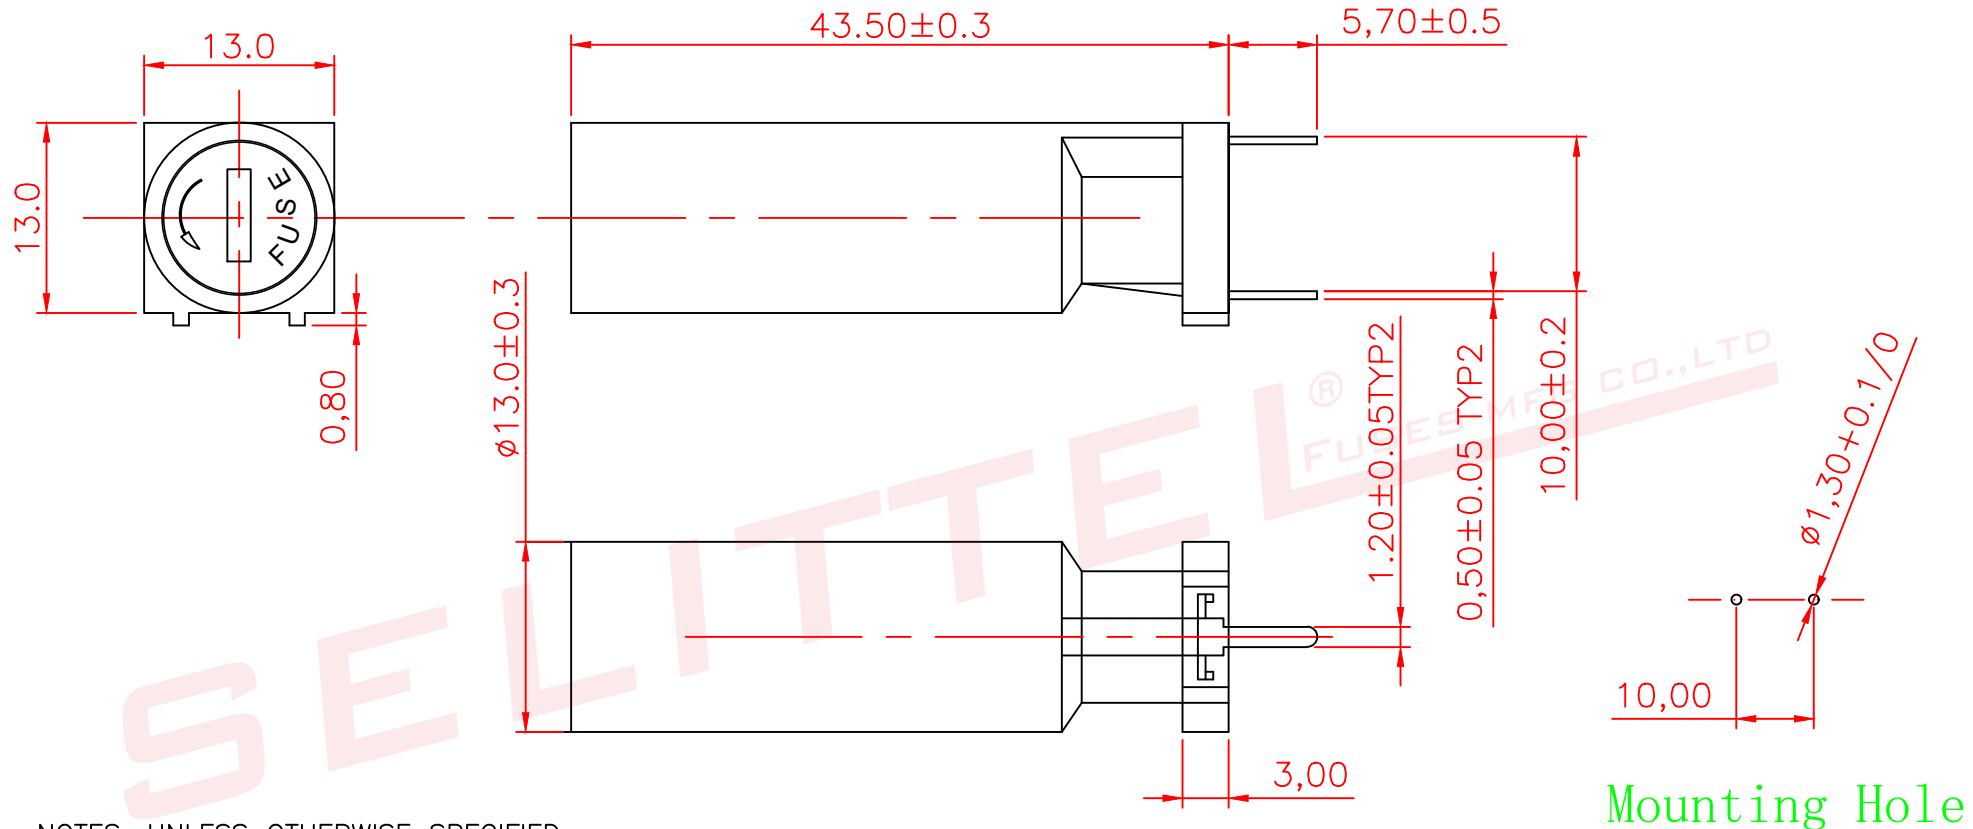

NOTES: UNLESS OTHERWISE SPECIFIED.

1. Applicable: For 6X30mm Fuse.
2. Electrical: Rated for current up to 16A250VAC;
3. Insulating Base body: PBT; Cap: PBT
4. Bayonet type cap; PC Board mount terminal;
5. Terminals: Brass with Tin-plated solderable type.
6. UL VDE CE CQC;



东莞市赛力特保险丝制造有限公司
DONGGUAN SELITTEL FUSES MFG CO., LTD

RoHS COMPLIANT		PCB Mount Fuseholder				CUSTOMER	
UNLESS OTHERWISE STATED		FOR 5x20mm fuse					
WALL THICKNESS		MM					
LINEAR	.XX	± 0.15					
	.XXX	± 0.05					
ANGULAR		± 0.5					
DRAFT ANGLE/SIDE		0.5 °MAX					
BURR & FLASH		0.10 MAX					
BREAK CORNERS		0.20 R.MAX					
PARTING LINE MISMATCH		0.05 MAX					