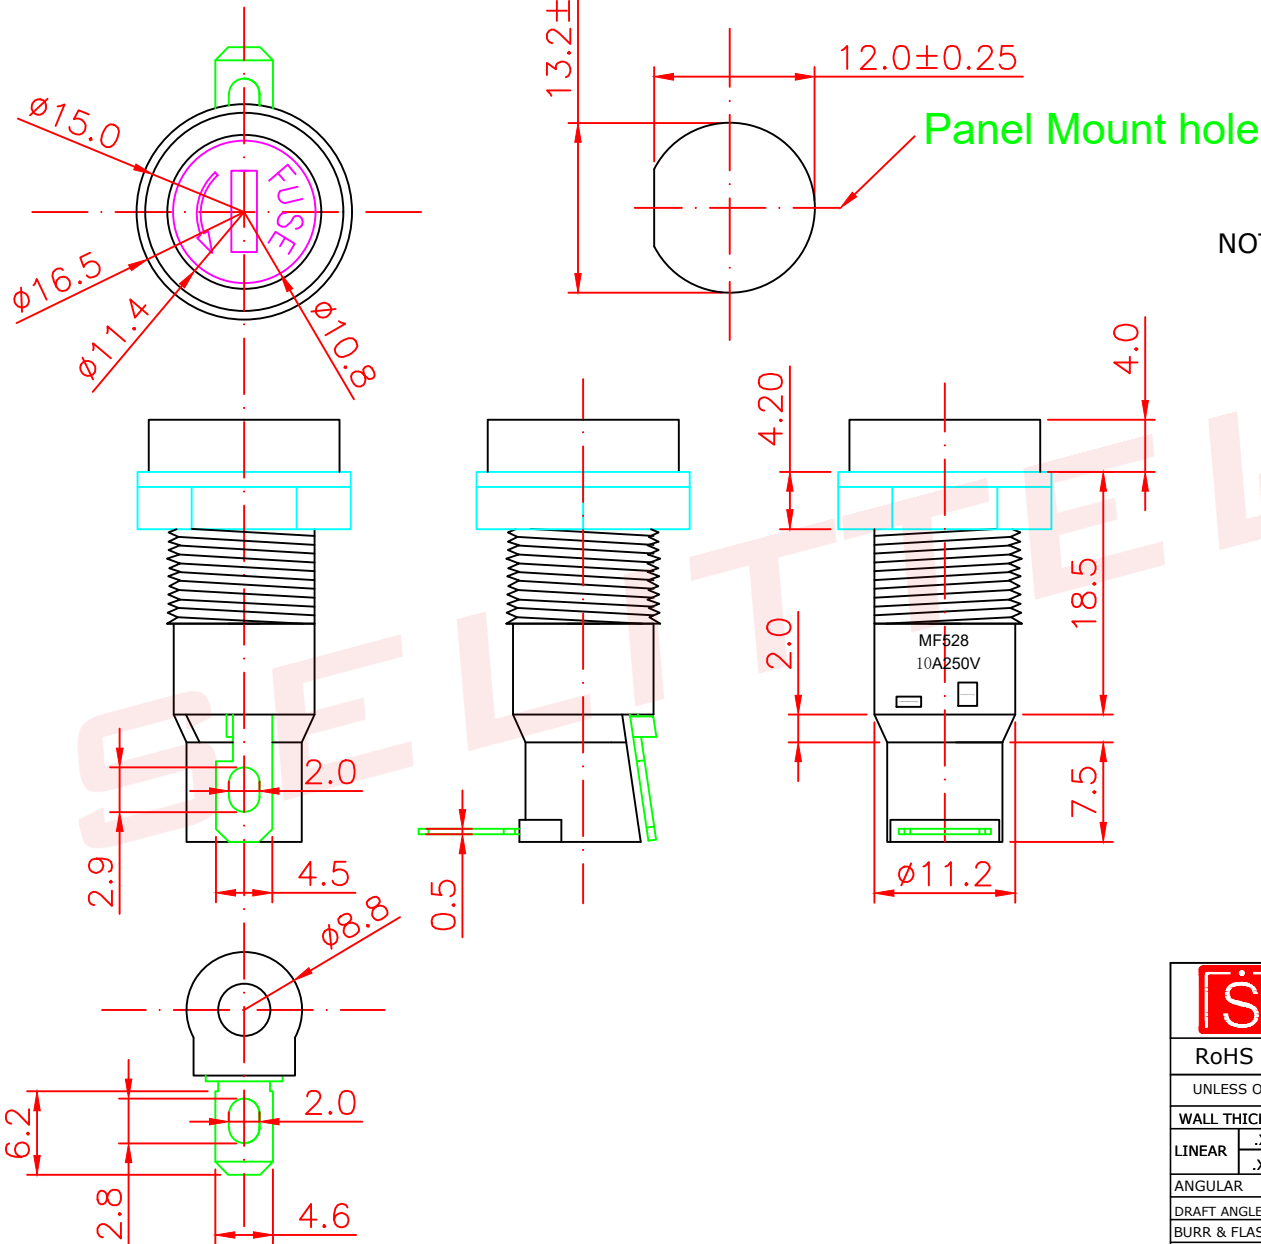


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELLER

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080210-03	ORIGINAL RELEASE		





NOTES: UNLESS OTHERWISE SPECIFIED.

1. Applicable: For 5x20mm Fuse.
2. Electrical: Rated for current up to 10A250V AC.
3. Insulating body: PBT
4. Terminals: Brass with Tin-plated solderable type.
5. Konb: Screw-driver slot fuse extractor type with Tin-plated copper alloy insert. spring loaded.
6. Insulation resistance: DC 500V 100MΩ Min
Voltage breakdown: AC 1500V 1 minute
7. Approvals: UL,CSA,VDE



东莞市赛力特保险丝制造有限公司
DONGGUAN SELITTEL FUSES MFG CO., LTD

RoHS COMPLIANT				Panel Mount Fuseholder FOR 5x20mm fuse				CUSTOMER		
UNLESS OTHERWISE STATED										
WALL THICKNESS		<div><div></div></div> MM		DSGN	Tom	12-22-08	SCALE	free		
LINEAR	.XX	±0.15 MM								
	.XXX	±0.05 MM								
ANGULAR		±0.5 DEG		DFTS	TOM	12-22-08	SHEET	1 OF 1		
DRAFT ANGLE/SIDE		0.5 °MAX								
BURR & FLASH		0.10 MAX								
BREAK CORNERS		0.20 R.MAX		CHKD			PART NO.			REV
PARTING LINE MISMATCH		0.05 MAX		APPD			MF528			A