



承 认 书

SPECIFICATION FOR APPROVAL

客户名称
Customer name

客户料号
Customer material No.

产品名称
Product name 小号插片保险丝

产品型号
Product model MIN-N

送样日期
Deliver date

本公司确认 (TRX APPROVAL)

检验 Inspection	校对 Proofreading	批准 Approval	签章 Signature
黄壁昌	邱曜东	Tommy	

客户确认 (CUSTOMER APPROVAL)

检验 Inspection	校对 Proofreading	批准 Approval	签章 Signature

确认结果Verify the results:

☐ 合格Qualified

☐ 不合格Unqualified

☐ 其他Other



MIN Blade-Fuses SPECIFICATION

SELITTEL FUSES MFG CO., LTD



Hongkong Selittel Electronic Co., Limited
Dongguan Selittel Fuses MFG. Co., Ltd

Add: Jinyinling industrial park, Hengkeng, Liaobu town, Dongguan city

Tel: 0769-83218762, 22498696, 23067981

Fax: 0769-22602343

Email: Tommyq@sellifuse.com

Web: <http://www.sellifuse.com>



一，产品用途/Product Application

MINI 保险丝正迅速成为车辆电路保护的新标准。其微型设计满足了在利用更少空间的同时保护更多电路的需求，并且其应对恶劣环境中高温的能力使 MINI Fuse 成为推荐的保护选择。您可以使用我们的保险丝座 SL-709CA/SL-506P/SL-1533/SL-506K/SL-506B/SL-1538/SL-1539/SL-1537 安装到线路中。

The MINI Fuse is quickly becoming the new standard for vehicle circuit protection. Its miniature design meets the need for more circuits to be protected while utilizing less space, and its ability to cope with high temperatures in adverse environments makes the MINI Fuse the recommended choice for protection. You can use our fuseholder SL-709CA/SL-506P/SL-1533/SL-506K/SL-506B/SL-1538/SL-1539/SL-1537 to being instanded.

二，产品特性/Product Feature

1. 适用额定电压直流至 32V，额定电流至 30A， 材质使用塑胶和合金材料。当被保护电路发生异常或短路或过载严重时，本保险丝将会及时熔断， 达到保护被保护电气电路和导线的目的，熔断后不可恢复，需要更换新保险丝继续工作。

Applicable rated voltage DC to 32V, rated current up to 30A, the material is made of plastic and alloy materials. When the protected circuit is abnormal or short circuit or overload is serious, the fuse will be blown in time to achieve the purpose of protecting the protected electrical circuit



and wire, and it cannot be recovered after blowing, and it needs to be replaced with a new fuse to continue to work

2, 熔断能力 Interrupting Rating: 1000A @ 32 VDC

3, 额定电压 Voltage Rating: Below 32 VDC

4, 工作温度 Operating Temperature Range: -40℃ to + 125℃

5, 壳体材料 Housing Material: PC

6, 熔断金属 Terminal: Zn Alloy

7, 壳体标志 Case Logo: Rating current / voltage/company logo

三, 熔断特性/ Functional Characteristics

测试电流 Test Current	Opening Time	
	Min.	Max.
110%	100Hrs	---
135%	0.75s	600s
160%	0.25S	50S
200%	0.15s	5s
350%	0.04s	0.5s
600%	0.02 s	0.1 s

备注: 根据使用条件的不同, 以上特性也会相应的变化。

Remark: Characteristics of fuses according to use conditions may change.



四， 产品适应标准/Complies Standard

SAE J2077, JASO D612, ISO 8820-3, GB/T31465.3


UL 248 Special Purpose Fuses

五， 产品规格对照表 current rating list

Assembly P/N	Case color	Current Rating
MIN-001	Light Blue	1A
MIN-002	Grey	2A
MIN-003	Violet	3A
MIN-004	Pink	4A
MIN-005	Tan	5A
MIN-07.5	Brown	7.5A
MIN-010	Red	10A
MIN-015	Blue	15A
MIN-020	Yellow	20A
MIN-025	Natural	25A
MIN-030	Green	30A



六， 产品尺寸图/Size drawing

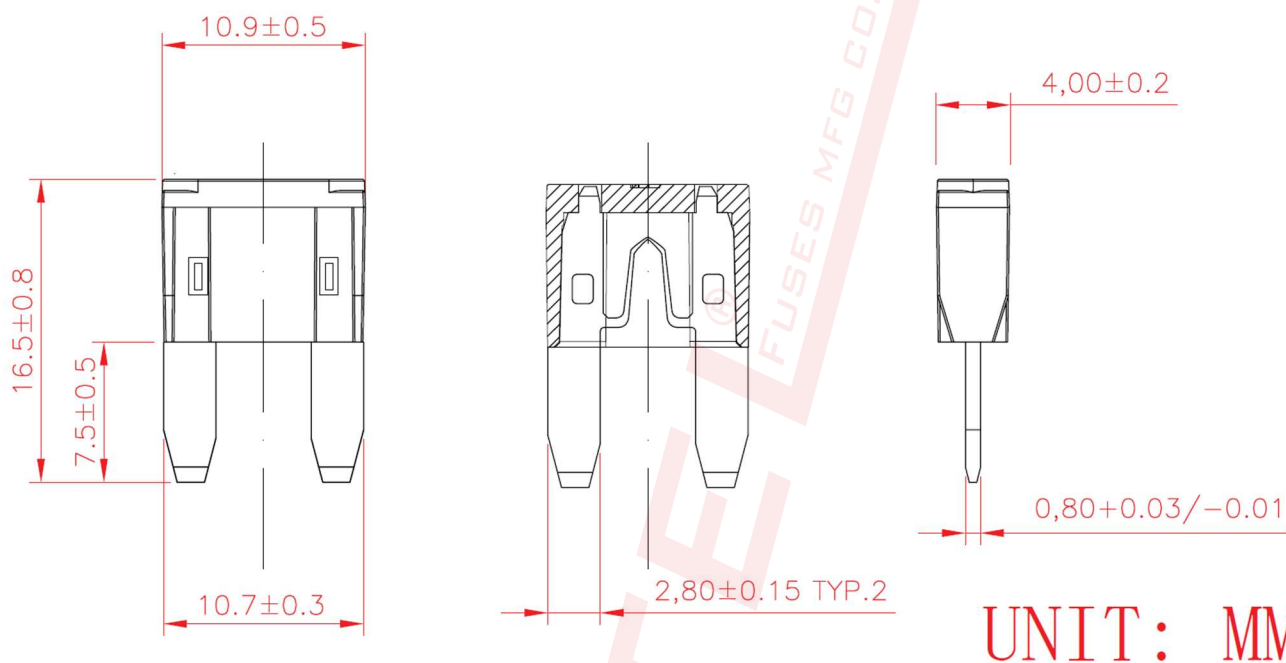

八， 包装/packing

1000PCS/Bag

1000 个装一个胶袋

4000PCS/small box

4000 个一小盒

20000PCS/Carton

20000 个一箱

