

F

E

D

C

B

A

F

E

D

C

B

A

1

2

3

4

5



6

7


8

DRAWING REVISIONS

REV	S/N	DESCRIPTION	APPROVED	DATE
A	20151109-02	ORIGINAL RELEASE		

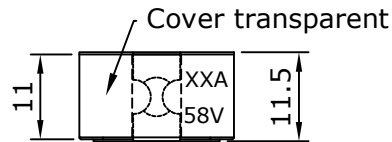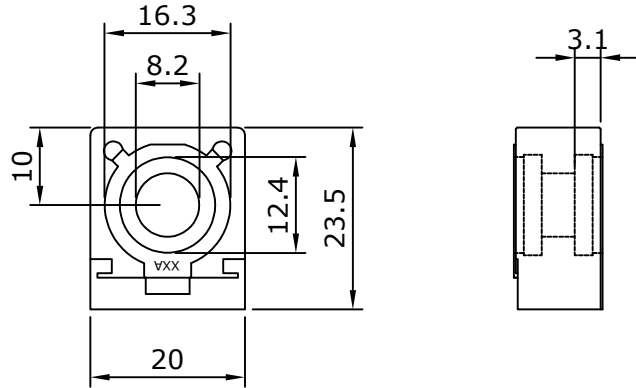

(Tolerance:±0.5)

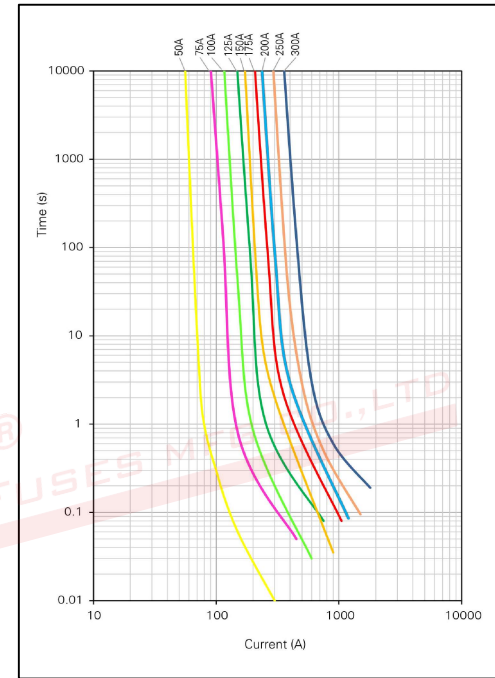

Description

1.Compact,high-amp fuse-appropriate for DC Main,inverter,windlass,and bow thruster circuit protection.

2.Provides high current protection in tight space constraints.

3.Functional Characteristics

TESTING CURRENT	BLOW TIME LIMIT
100%	100Hr. Min
135%	1Hr. Max
150%	1sec-600sec
200%	0.2sec-60sec
300%	0.05sec -1.5sec

4. Standard:ISO8820-6; DIN 72581-5.

5.Volt:58V DC; Interrupting Rating:2000A@58Vdc.

Assembly P/N	MRBF-50A	MRBF-75A	MRBF-100A	MRBF-125A	MRBF-150A
Voltage rating	58V	58V	58V	58V	58V
RATING	50A	75A	100A	125A	150A
Assembly P/N	MRBF-175A	MRBF-200A	MRBF-250A	MRBF-300A	
Voltage rating	58V	58V	58V	58V	
RATING	175A	200A	250A	300A	



东莞市赛力特保险丝制造有限公司
DONGGUAN SELITTEL FUSES MFG CO., LTD

UNLESS OTHERWISE STATED

Marine-Rated Battery Terminal

CUSTOMER

WALL THICKNESS	MM
LINEAR .XX	±0.15 MM
.XXX	±0.05 MM
ANGULAR	±0.5 DEG
DRAFT ANGLE/SIDE	0.5 °MAX
BURR & FLASH	0.10 MAX
BREAK CORNERS	0.20 R.MAX
PARTING LINE MISMATCH	0.05 MAX

Fuse				CUSTOMER	
DSGN	Tommy	2015-11-09	SCALE	free	
DFTS	Owen	2015-11-09	SHEET	1 OF 1	
CHKD			PART NO.		REV
APPD			MRBF		A

3	BL-MRBF	Cover	1	PC	Nutire
2	CT-MRBF	Contact	1	Brass	Tin plated
1	PB-MRBF	Base	1	Ceramic	White
ITEM	P/N	DESCRIPTION	QTY	Material	REMARKS

1

2

3

4

5

6

7

8