


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY SELLI ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY AND TO SELLI ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELLI

DRAWING REVISIONS

REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080210-09	ORIGINAL RELEASE		

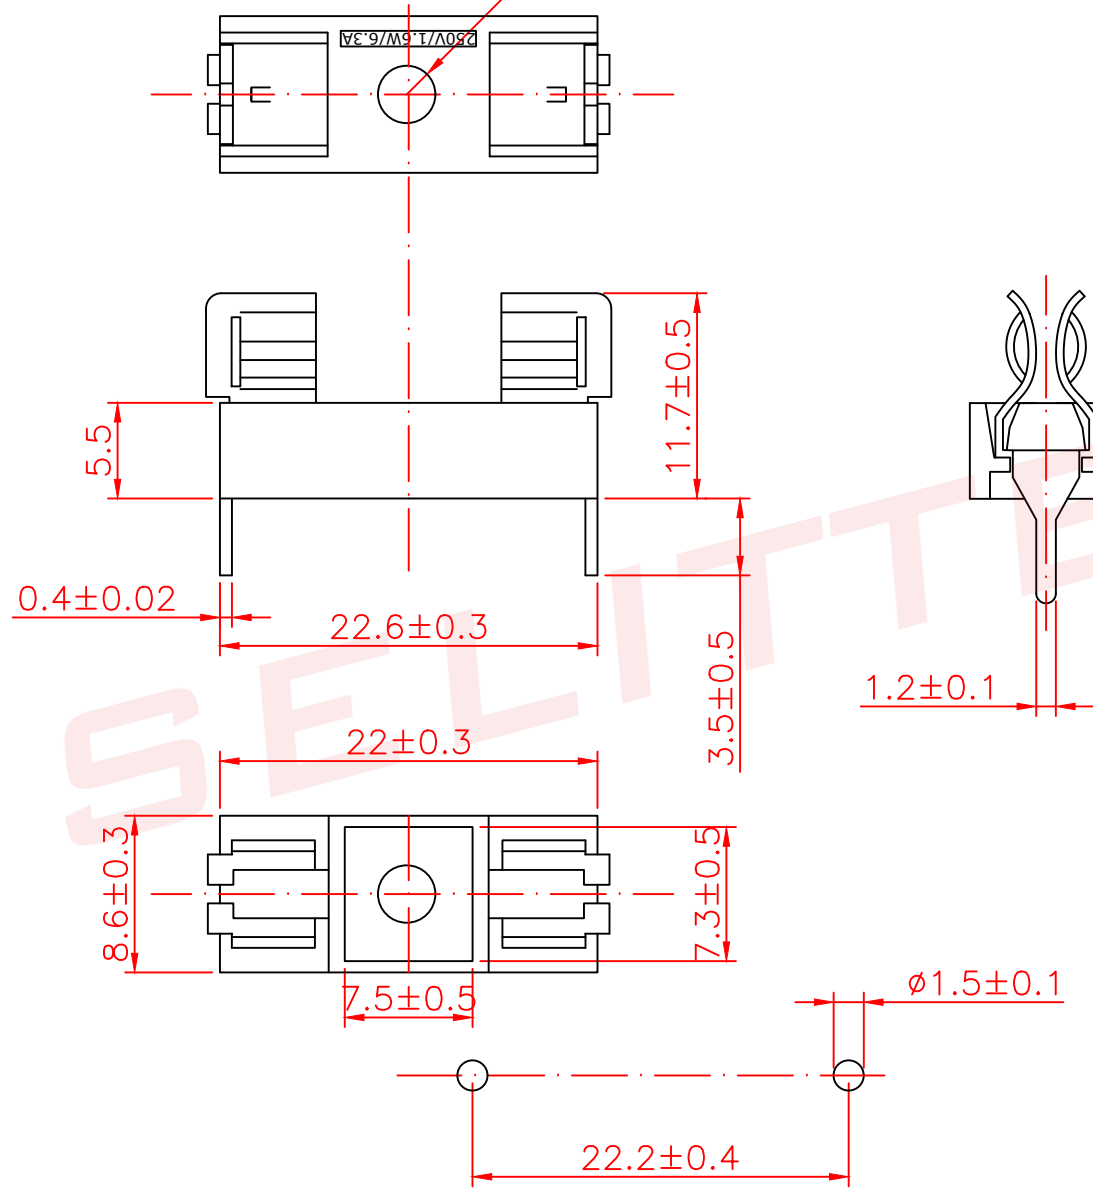

NOTES: UNLESS OTHERWISE SPECIFIED.

1. Applicable: For 5x20mm Fuse.
2. Electrical: Rated for current up to 6.3A250VAC
3. Insulating Base body: PBT 94V0
4. Terminals: Brass with Ni-plated solderable type.

		东莞市赛力特保险丝制造有限公司 DONGGUAN SELITTEL FUSES MFG CO., LTD		
RoHS COMPLIANT		PCB Mount Fuseholder		CUSTOMER
UNLESS OTHERWISE STATED		FOR 5x20mm fuse		
WALL THICKNESS	MM	DSGN	Tom	12-22-08
LINEAR .XX	± 0.15	DFTS	TOM	12-22-08
LINEAR .XXX	± 0.05	CHKD		
ANGULAR	± 0.5	APPD		
DRAFT ANGLE/SIDE	0.5 °MAX			
BURR & FLASH	0.10 MAX			
BREAK CORNERS	0.20 R.MAX			
PARTING LINE MISMATCH	0.05 MAX			
		PART NO.		REV
		PTF-15		A

Mounting Hole

ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY SELTI ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY AND TO SELTI ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELTI


DRAWING REVISIONS

REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080210-09	ORIGINAL RELEASE		

NOTES: UNLESS OTHERWISE SPECIFIED.

1. Applicable: For PTF-15

2. Insulating Base body: PC;

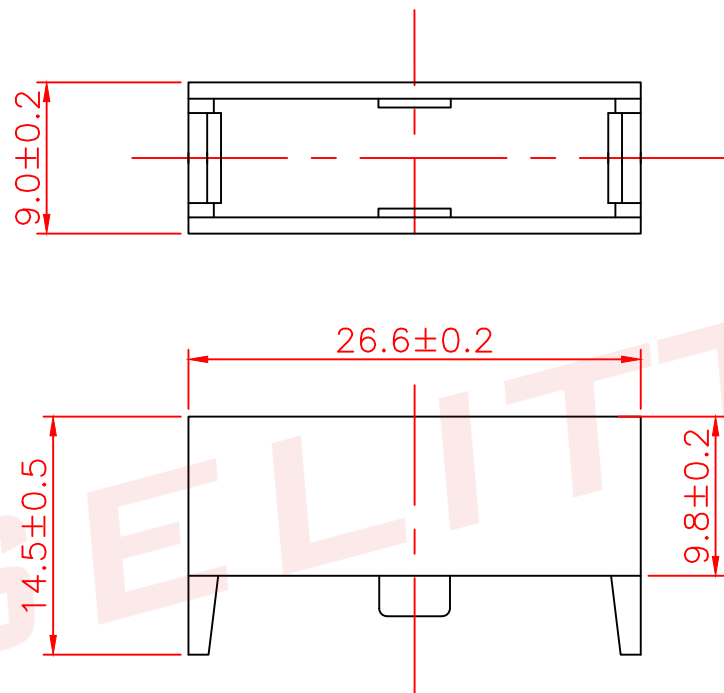

东莞市赛力特保险丝制造有限公司
DONGGUAN SELITTEL FUSES MFG CO., LTD

RoHS COMPLIANT		UNLESS OTHERWISE STATED		PCB Mount Fuseholder		CUSTOMER	
WALL THICKNESS		MM		FOR SL-15			
LINEAR	.XX	±0.15	MM	DSGN	Tom	12-22-08	SCALE free
	.XXX	±0.05	MM	DFTS	TOM	12-22-08	SHEET 1 OF 1
ANGULAR		±0.5	DEG	CHKD			PART NO. BS140C
DRAFT ANGLE/SIDE		0.5 °MAX		APPD			REV A
BURR & FLASH		0.10	MAX				
BREAK CORNERS		0.20	R.MAX				
PARTING LINE MISMATCH		0.05	MAX				