


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELL.



DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080212-03	ORIGINAL RELEASE		

NOTES: UNLESS OTHERWISE SPECIFIED.

- 1. Apply for 5.2x20mm tube fuse.
- 2. Max rating: 10A 250VAC
- 3. Wire: 1015 18AWG Red.
- 4. Electrical rating: -40° to +80°.

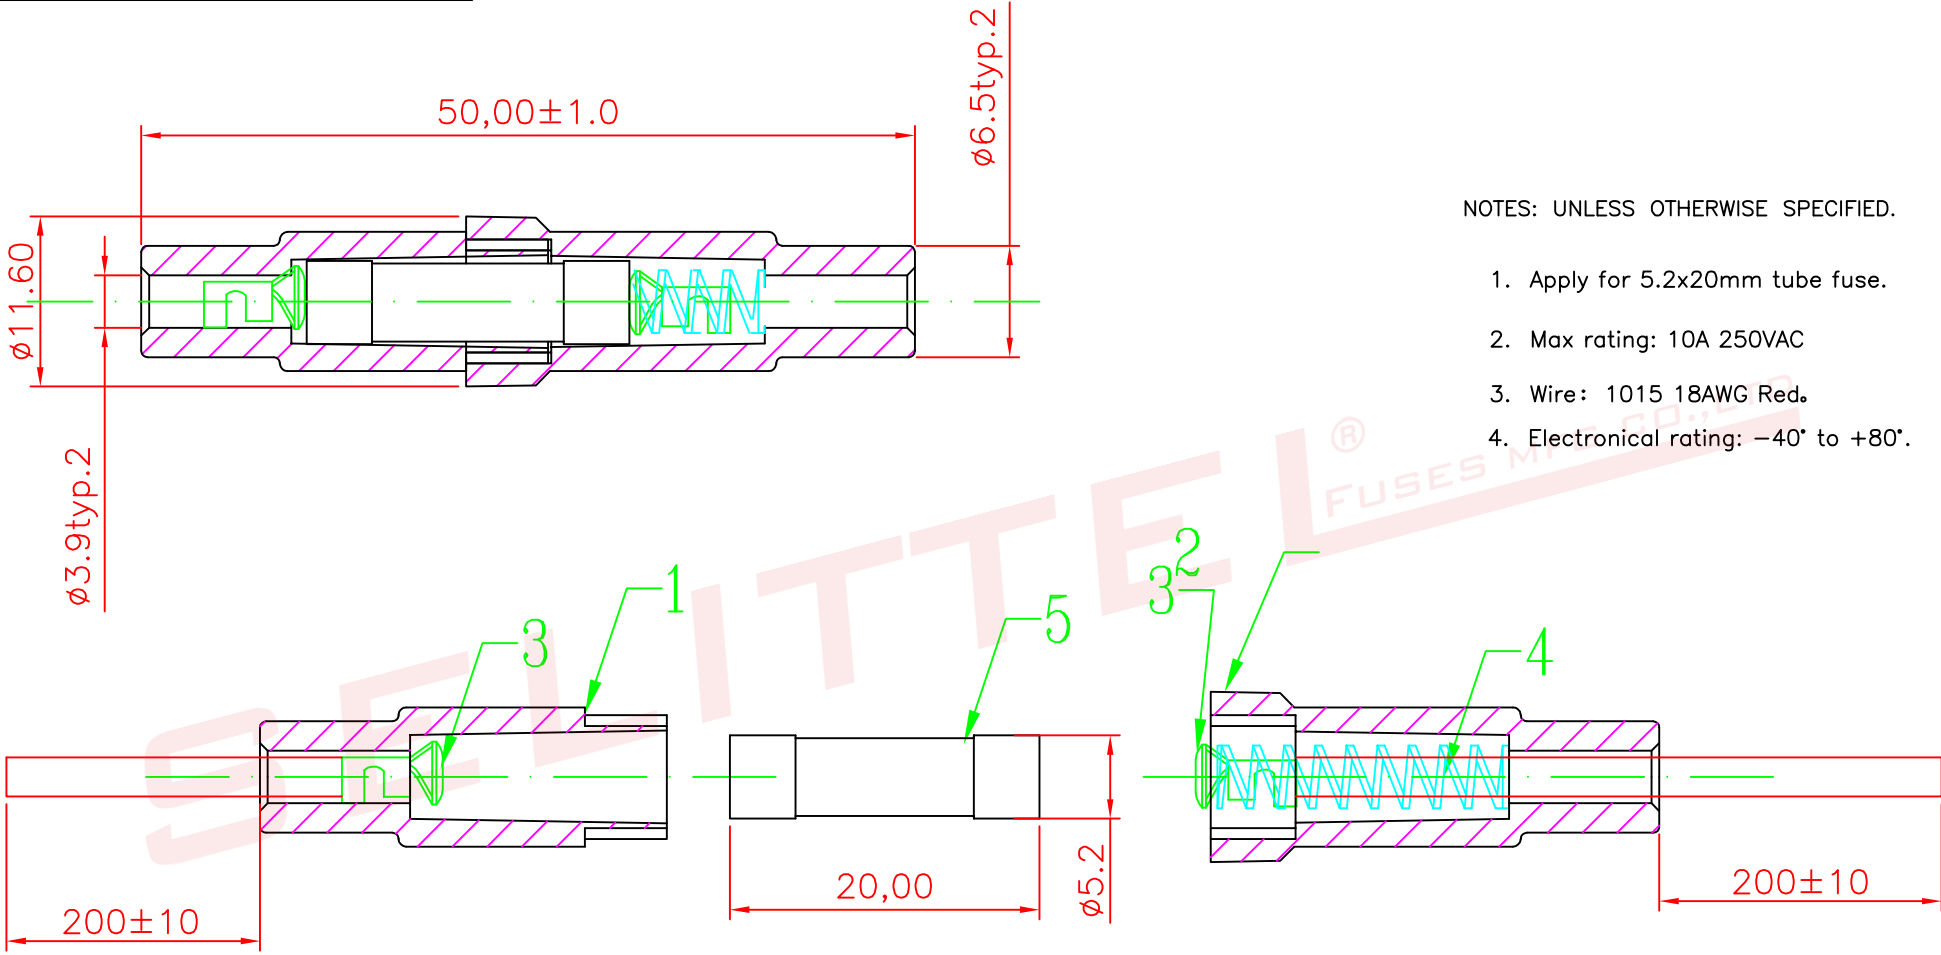

5		5.2X20MM TUBE FUSE	1	N/A	
4	S-520-1	SPRING	1	SPRING STEEL	Ni PLATED
3	SL-841-N	CONTACT	2	BRASS	NATURE
2	FFH-03-2	BOTTOM CASE	1	bakelite	BLACK
1	FFH-03-1	TOP CASE	1	bakelite	BLACK
ITEM	P/N	DESCRIPTION	QTY	Material	REMARKS

		东莞市赛力特保险丝制造有限公司 SELITTEL Fuse MFG. Co., LTD			
RoHS COMPLIANT		SCREW MOUNTING INLINE FUSEHOLDER TOP CASE			
UNLESS OTHERWISE STATED		FOR 5.2X20MM TUBE FUSE			
WALL THICKNESS					
LINEAR	.XX	±0.15			
	.XXX	±0.05			
ANGULAR		±0.5			
DRAFT ANGLE/SIDE		0.5 °MAX			
BURR & FLASH		0.10 MAX			
BREAK CORNERS		0.20 R.MAX			
PARTING LINE MISMATCH		0.05 MAX			
DSGN	Tommy Qiu	07-12-08	SCALE	free	
DFTS	Tommy Qiu	07-12-08	SHEET	1 OF 1	
CHKD			PART NO.	R3-32	REV
APPD					A