


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY AND TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELL.

DRAWING REVISIONS

REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080212-03	ORIGINAL RELEASE		

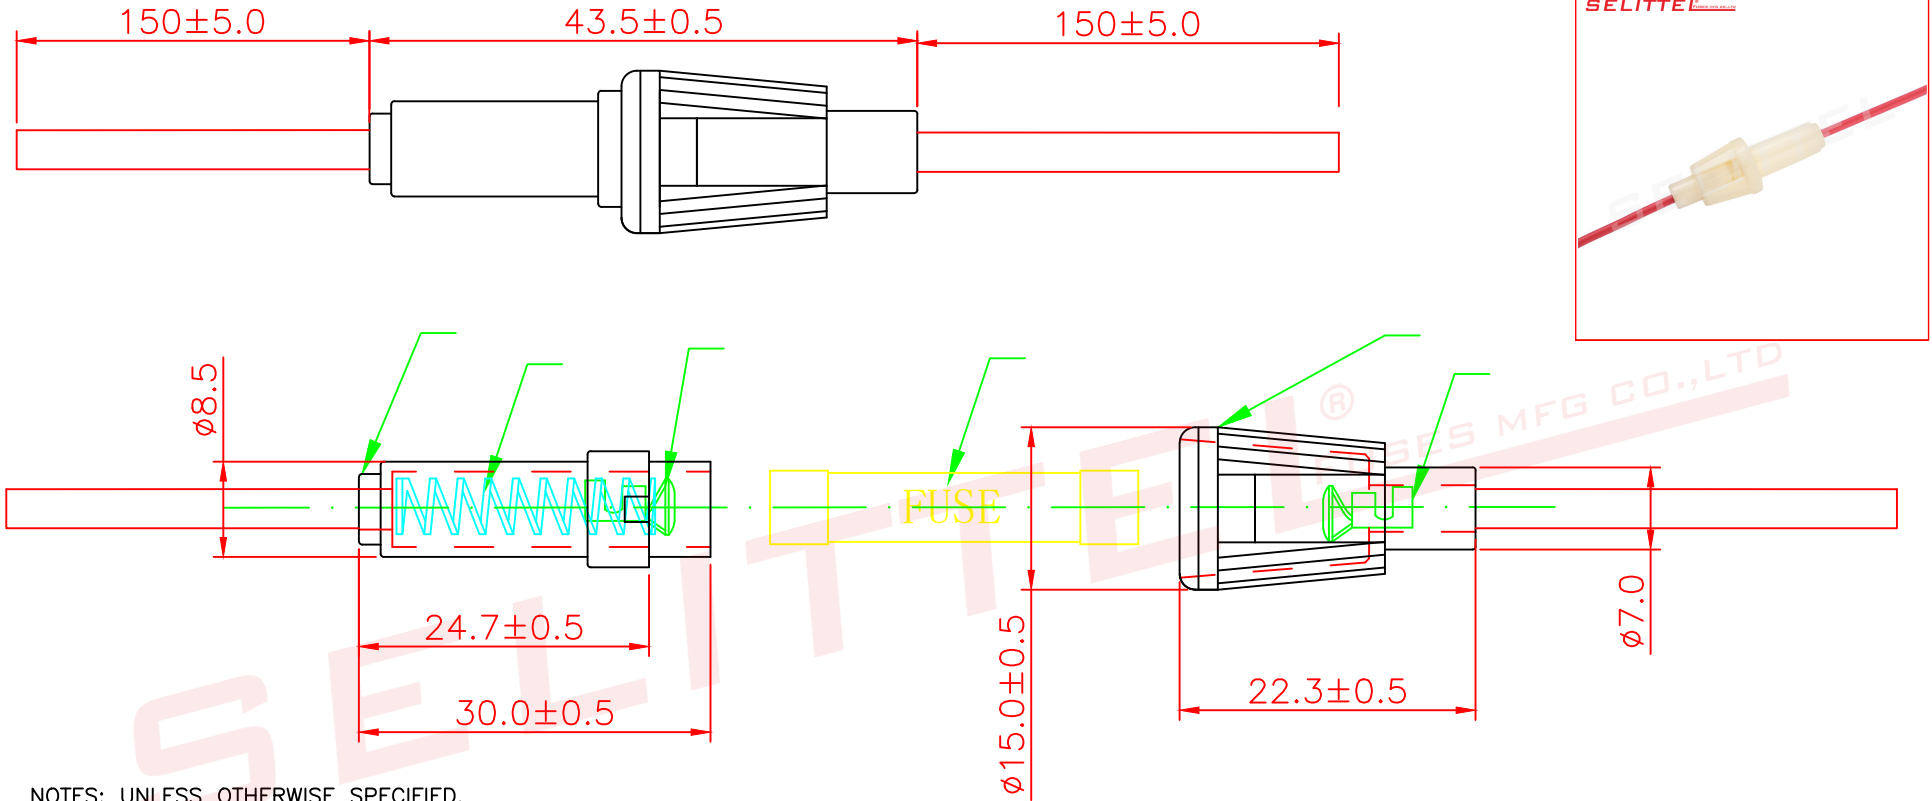

NOTES: UNLESS OTHERWISE SPECIFIED.

1. Apply for 5x20mm tube fuse.
2. Max rating: 5A 250VAC
3. Wire: 1015 20AWG Red.
4. Electrical rating: -40° to +105°.

5		5X20MM T2AL250V Glass fuse	1	N/A	
4	S-520-1	SPRING	1	SPRING STEEL	Ni plated
3	SL-841-N	CONTACT	2	BRASS	NATURE
2	SL-520-6	BOTTOM CASE	1	PA66	nature 94-V0
1	SL-520-7	TOP CASE	1	PA66	Nature 94-V0
ITEM	P/N	DESCRIPTION	QTY	Material	REMARKS



东莞市赛力特保险丝制造有限公司
DONGGUANG SELITTEL FUSES MFG CO., LTD

RoHS COMPLIANT

UNLESS OTHERWISE STATED

WALL THICKNESS		MM
LINEAR	. XX	±0.15
	. XXX	±0.05
ANGULAR		±0.5 DEG
DRAFT ANGLE/SIDE		0.5 ° MAX
BURR & FLASH		0.10 MAX
BREAK CORNERS		0.20 R. MAX
PARTING LINE MISMATCH		0.05 MAX

SCREW MOUNTING INLINE FUSEHOLDER
TOP CASE
FOR 5X20MM TUBE FUSE

DSGN	Tommy Qiu	07-12-08	SCALE	free	
DFTS	Tommy Qiu	07-12-08	SHEET	1 OF 1	
CHKD			PART NO.	R3-48	REV
APPD					A