





F

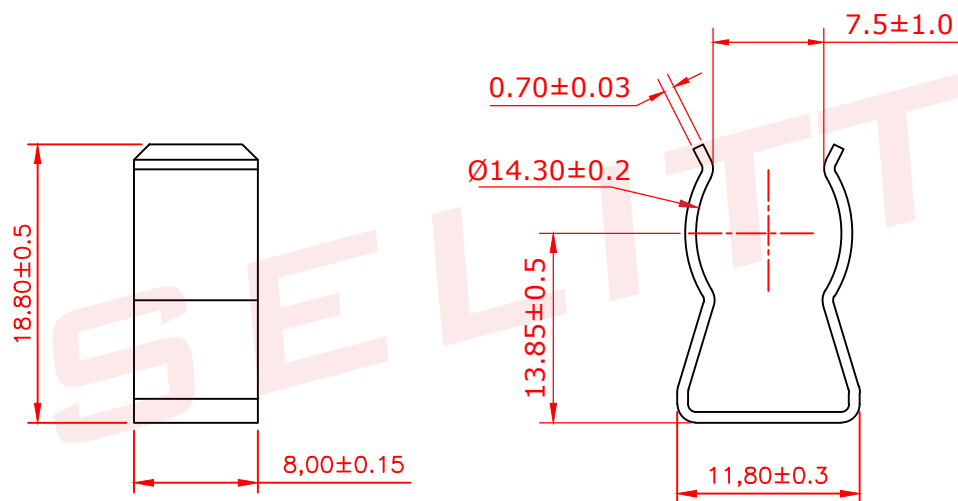

1. material: Phosphor Bronze C5191, T=0.7mm;
2. finish: Mate Tin plated 3-6um according to astm B545,
Over electroless nickel 2-4um according to astm B733
type IV.
3. removed burrs and sharp edge.
4. Mounts w/4.0mm rivet or screw.
5. For 14.3dia. Fuses.
6. Suitable rated current: 60A.



东莞市赛力特保险丝制造有限公司
DONGGUAN SELITTEL FUSES MFG CO., LTD

RoHS COMPLIANT			Fuse Clip W/O ear tpye						
UNLESS OTHERWISE STATED									
WALL THICKNESS		 MM	ø14.3mm Fuse						
LINEAR	.XX	±0.15 MM							
	.XXX	±0.05 MM							
ANGULAR		±0.5 DEG	DSGN	TYTool	2022-5-7	SCALE	free		
DRAFT ANGLE/SIDE		0.5 ° MAX	DFTS	Tommy Qiu	2022-5-7	SHEET	1 OF 1		
BURR & FLASH		0.10 MAX	CHKD			PART NO.			REV
BREAK CORNERS		0.20 R MAX	APPD			SL-1451-3			A
PARTING LINE MISMATCH		0.05 MAX							

A