
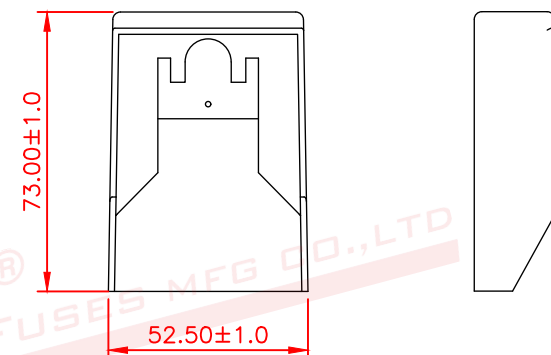
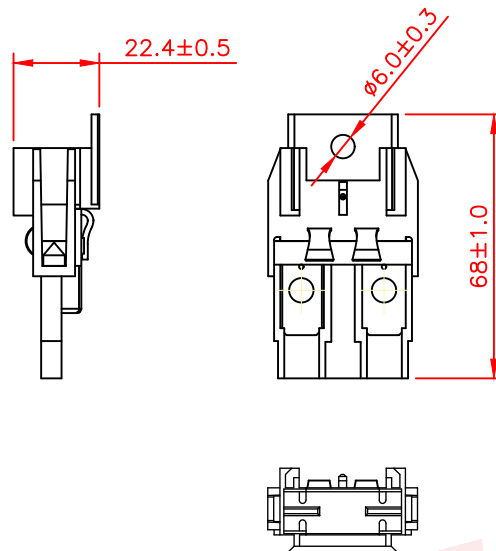


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY selittel fuse MFG CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY AND TO selittel fuse MFG CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF Selittel fuse MFG CO., LTD




## DRAWING REVISIONS

REV	S/N	DESCRIPTION	APPROVED	DATE
A	20070823-1	ORIGINAL RELEASE		

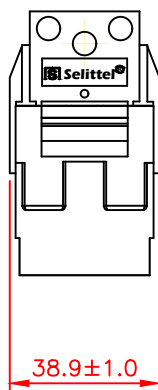

NOTES: UNLESS OTHERWISE SPECIFIED.

- Material: Body: PA66 Black; Cover: PP Natural.  
Terminal: Copper T=0.8MM, Oil removal degreasing.
- Removed burrs and sharp edge.
- For MAX/ATM blade fuse.
- Suitable rated current: 30-100A.
- RoHS COMPLIANT.
- Including 2PCS screw  $\varnothing 5.3\text{MM}$  M5\*8;
- Can be selected by two type terminal: A, RNB5-5 for wire  $\varnothing 2.5$  6mm<sup>2</sup>  
B, RNB8-5 for wire  $\varnothing 5.0$  10mm<sup>2</sup>;

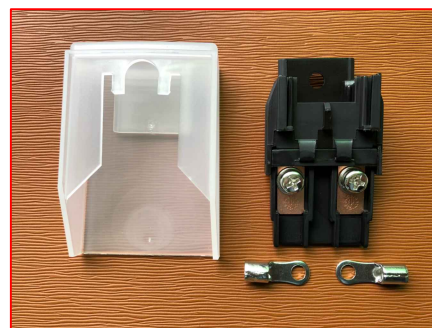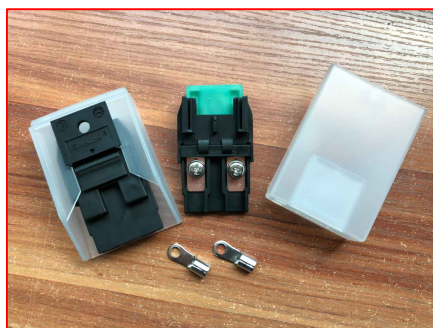

东莞市赛力特保险丝制造有限公司  
DONGGUAN SELITTEL FUSES MFG CO., LTD

RoHS COMPLIANT

UNLESS OTHERWISE STATED

WALL THICKNESS		MM
LINEAR	.XX	±0.1
	.XXX	±0.05
ANGULAR		±0.5 DEG
DRAFT ANGLE/SIDE		0.5 °MAX
BURR & FLASH		0.10 MAX
BREAK CORNERS		0.20 R.MAX
PARTING LINE MISMATCH		0.05 MAX

SL-152

For Max blade fuse

DSGN	Tommy Qiu	07-12-08	SCALE	free	
DFTS	Tommy Qiu	07-12-08	SHEET	1 OF 1	
CHKD			PART NO.		REV
APPD			SL-152		A