



ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY SELLI ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY AND TO SELLI ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELLI

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080210-09	ORIGINAL RELEASE		

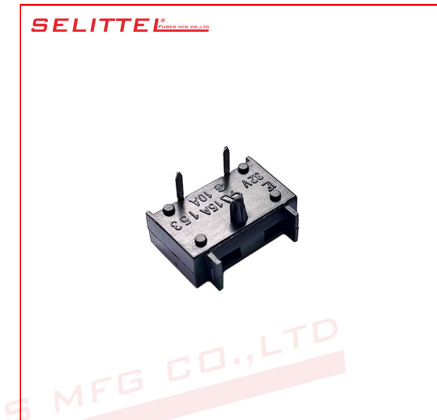

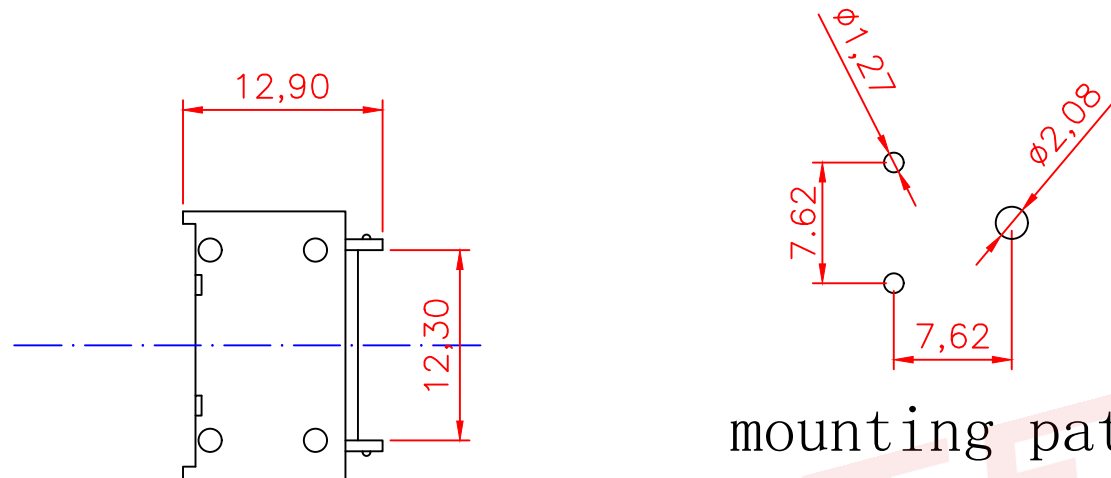


mounting pattern

NOTES: UNLESS OTHERWISE SPECIFIED.

1. Applicable: For MINI blade fuse.
2. Electrical: Rated for current up to 15A32VAC
3. Insulating Base body: PA +30%GP
Contact: Brass with Tin plated



东莞市赛力特保险丝制造有限公司
DONGGUAN SELITTE FUSES MFG CO., LTD

RoHS COMPLIANT				PCB Mount Fuseholder FOR MINI AUTO FUSE				CUSTOMER	
UNLESS OTHERWISE STATED									
WALL THICKNESS		 MM							
LINEAR	.XX	±0.15 MM		DSGN	Tom	12-22-08	SCALE	free	
	.XXX	±0.05 MM							
ANGULAR		±0.5 DEG		DFTS	TOM	12-22-08	SHEET	1 OF 1	
DRAFT ANGLE/SIDE		0.5 °MAX							
BURR & FLASH		0.10 MAX		CHKD			PART NO.		REV
BREAK CORNERS		0.20 R.MAX						SL-1537	
PARTING LINE MISMATCH		0.05 MAX		APPD					A