
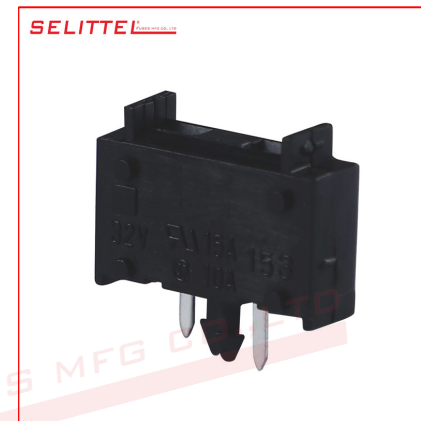


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY SELLI ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY AND TO SELLI ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELLI

DRAWING REVISIONS


REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080210-09	ORIGINAL RELEASE		
B	2020050932	Changed the size		

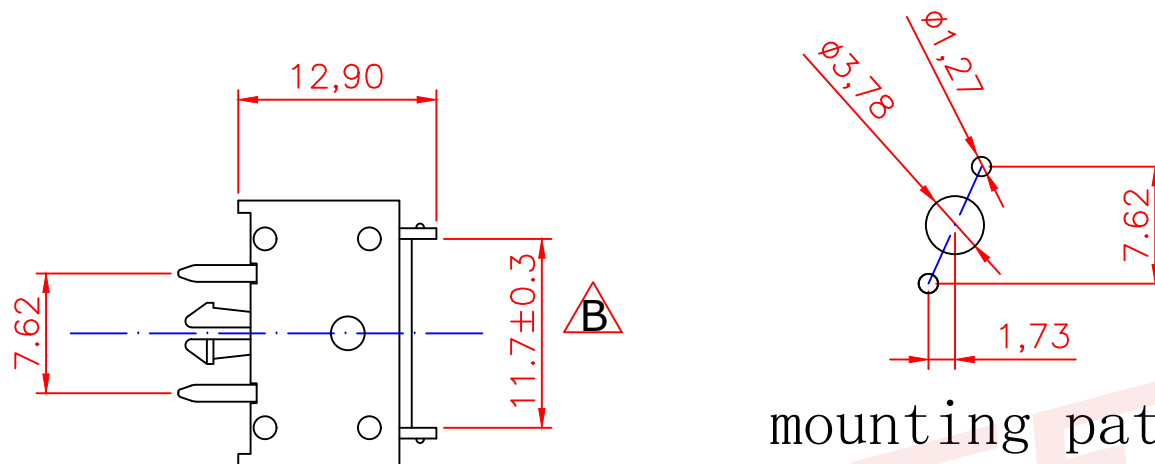



mounting pattern

NOTES: UNLESS OTHERWISE SPECIFIED.

1. Applicable: For MINI blade fuse.
2. Electrical: Rated for current up to 15A32VAC
3. Insulating Base body: PA +30%GP
Contact: Brass with Tin plated

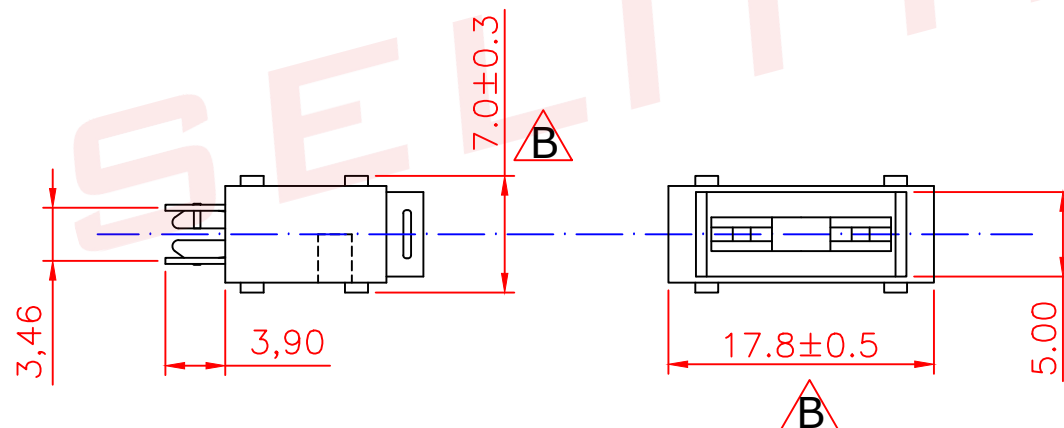

东莞市赛力特保险丝制造有限公司
DONGGUAN SELITTEL FUSES MFG CO., LTD

RoHS COMPLIANT			PCB Mount Fuseholder FOR MINI AUTO FUSE					CUSTOMER						
UNLESS OTHERWISE STATED														
WALL THICKNESS		 MM	DSGN		Tom		12-22-08		SCALE		free			
LINEAR	.XX	±0.15 MM												
	.XXX	±0.05 MM	DFTS		TOM		12-22-08		SHEET		1 OF 1			
ANGULAR			±0.5 DEG		CHKD		PART NO.		REV					
DRAFT ANGLE/SIDE			0.5 °MAX		APPD		SL-1538		B					
BURR & FLASH			0.10 MAX											
BREAK CORNERS			0.20 R.MAX											
PARTING LINE MISMATCH			0.05 MAX											