


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELL.

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080201-1	ORIGINAL RELEASE		

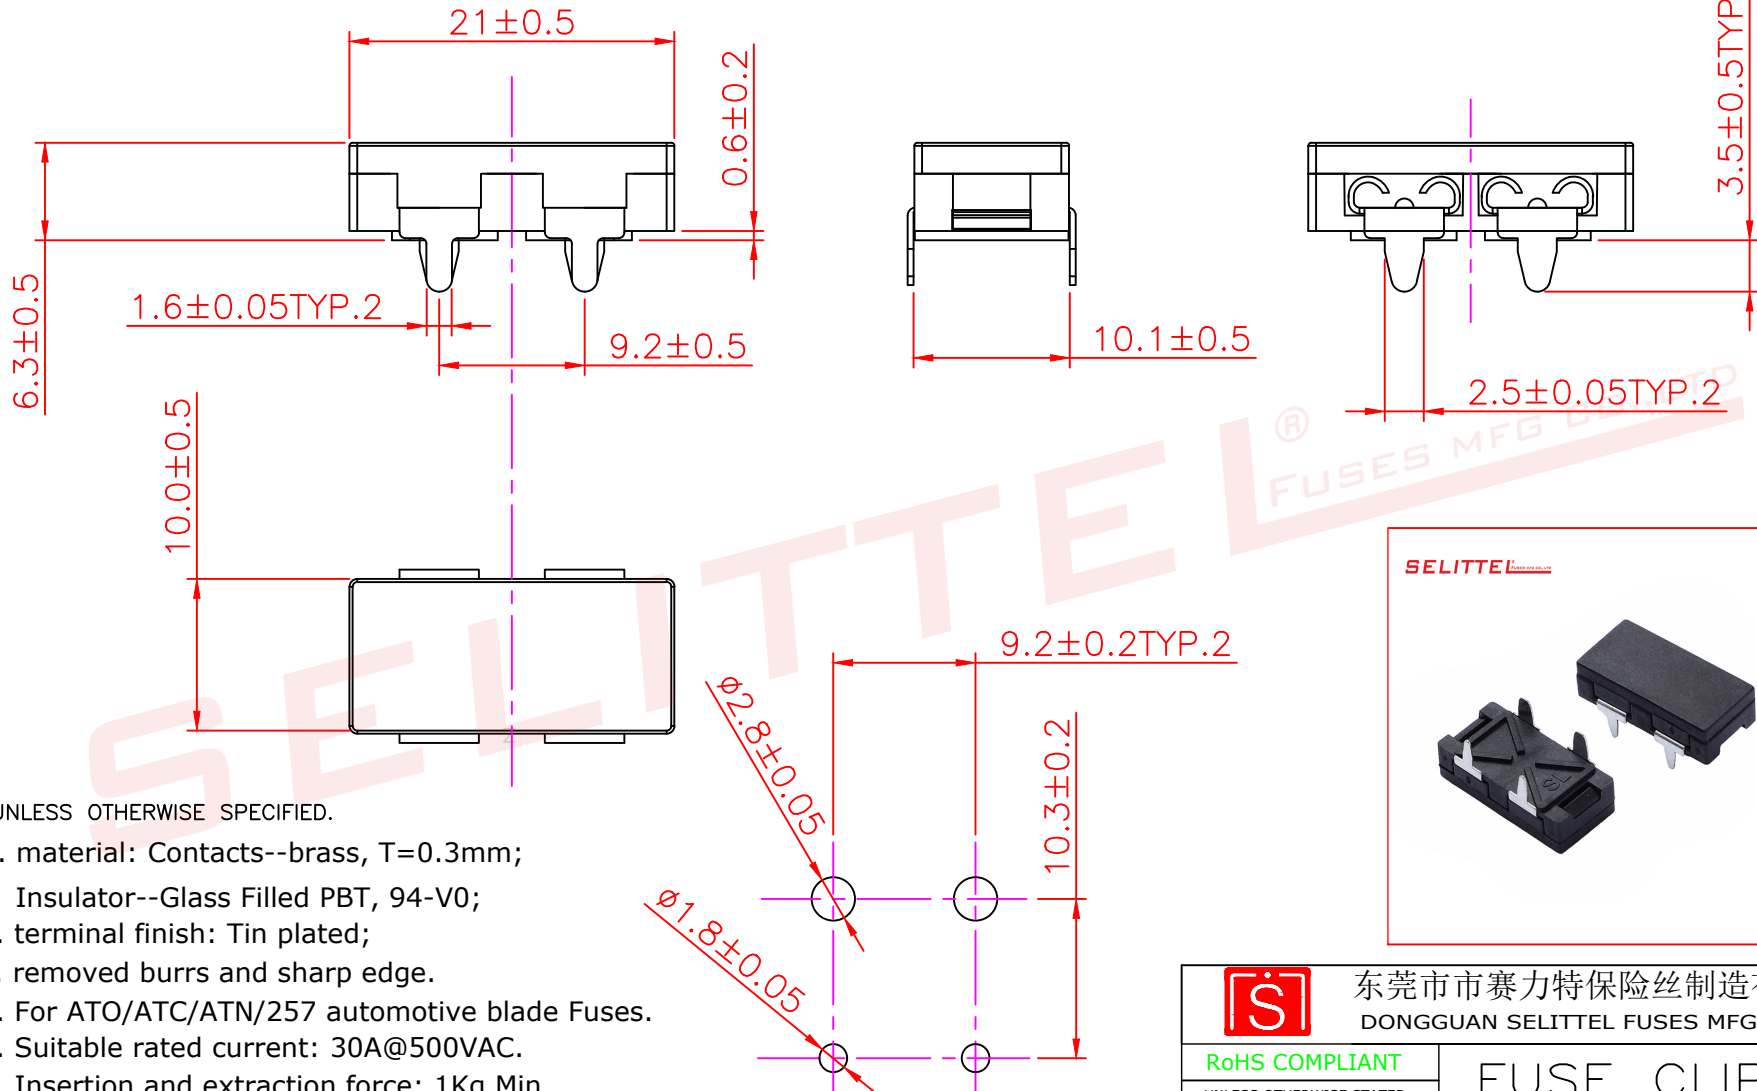

NOTES: UNLESS OTHERWISE SPECIFIED.

- material: Contacts--brass, T=0.3mm;
Insulator--Glass Filled PBT, 94-V0;
- terminal finish: Tin plated;
- removed burrs and sharp edge.
- For ATO/ATC/ATN/257 automotive blade Fuses.
- Suitable rated current: 30A@500VAC.
- Insertion and extraction force: 1Kg Min.
- Dielectric Strength: Min.AC1000V.
- Contact Resistance: Max 50m ω .
- temperature rise: 50°Max.
- Insulation Resistance At 500V DC: 100M ω

		东莞市市赛力特保险丝制造有限公司 DONGGUAN SELITTEL FUSES MFG CO., LTD		
ROHS COMPLIANT		FUSE CLIP		
UNLESS OTHERWISE STATED		FOR ATO ATC ATN ATQ ATY 257		
WALL THICKNESS				
LINEAR	.XX	±0.15	MM	
	.XXX	±0.05	MM	
ANGULAR		±0.5	DEG	
DRAFT ANGLE/SIDE		0.5	°MAX	
BURR & FLASH		0.10	MAX	
BREAK CORNERS		0.20	R.MAX	
PARTING LINE MISMATCH		0.05	MAX	
DSGN	Tommy Qiu	08-1-07	SCALE	free
DFTS	Tommy Qiu	08-1-07	SHEET	1 OF 1
CHKD			PART NO.	
APPD				
SL-25A				REV A