


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF ANDU.

NOTES: UNLESS OTHERWISE SPECIFIED.

1. Apply for 5.2x20mm tube fuse.
2. Max rating: 10A 250VAC

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080212-03	ORIGINAL RELEASE		

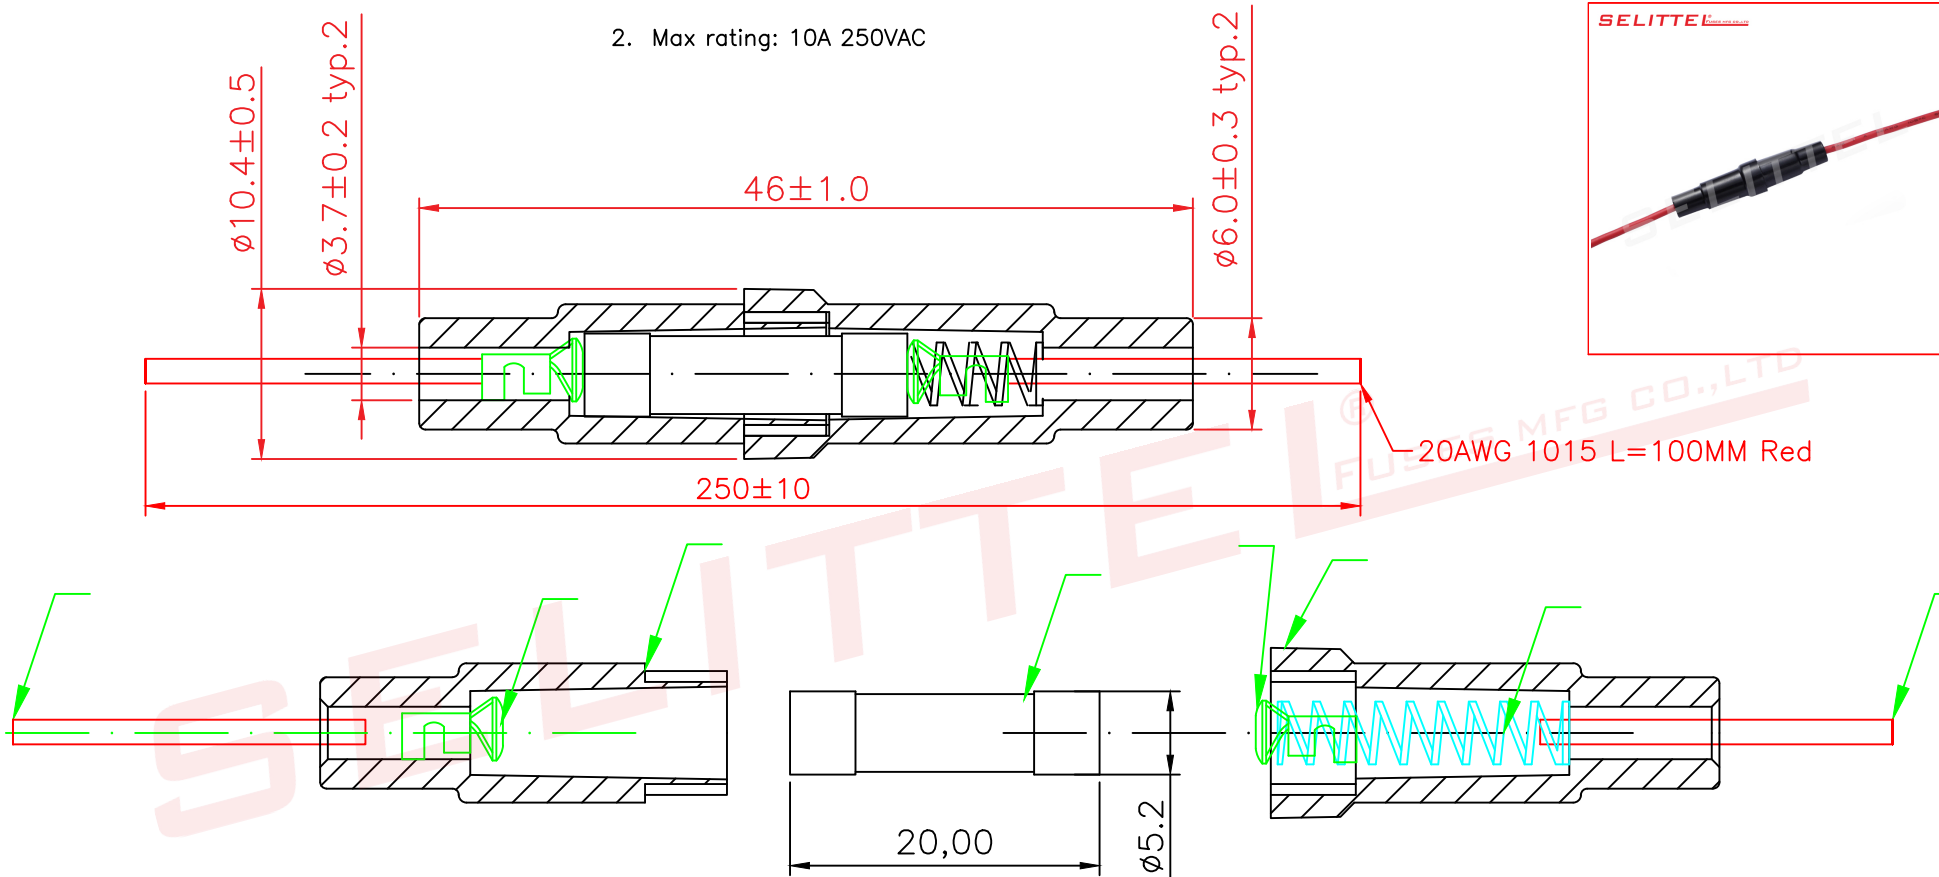

6	L-18#-160	wire	2	N/A	20AWG 1015
5			1		
4	S-520-1	SPRING	1	SPRING STEEL	Ni PLATED
3	SL-842-N	CONTACT	2	BRASS	NATURE
2	FFH-03-2	BOTTOM CASE	1	PA	BLACK
1	FFH-03-1	TOP CASE	1	PA	BLACK
ITEM	P/N	DESCRIPTION	QTY	Material	REMARKS



东莞市赛力特保险丝制造有限公司
DONGGUAN SELITTEL FUSE MFG CO., LTD

ROHS COMPLIANT		SCREW MOUNTING INLINE FUSEHOLDER				
UNLESS OTHERWISE STATED		FOR 5.2X20MM TUBE FUSE				
WALL THICKNESS						
LINEAR	.XX	±0.15 MM				
	.XXX	±0.05 MM				
ANGULAR		±0.5 DEG				
DRAFT ANGLE/SIDE		0.5 °MAX				
BURR & FLASH		0.10 MAX				
BREAK CORNERS		0.20 R.MAX				
PARTING LINE MISMATCH		0.05 MAX				
DSGN	Tommy Qiu	07-12-08	SCALE	free		
DFTS	Tommy Qiu	07-12-08	SHEET	1 OF 1		
CHKD			PART NO.		SL-32	
APPD			REV	A		