



F
E
D
C
B
A

12345678

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080201-1	ORIGINAL RELEASE		

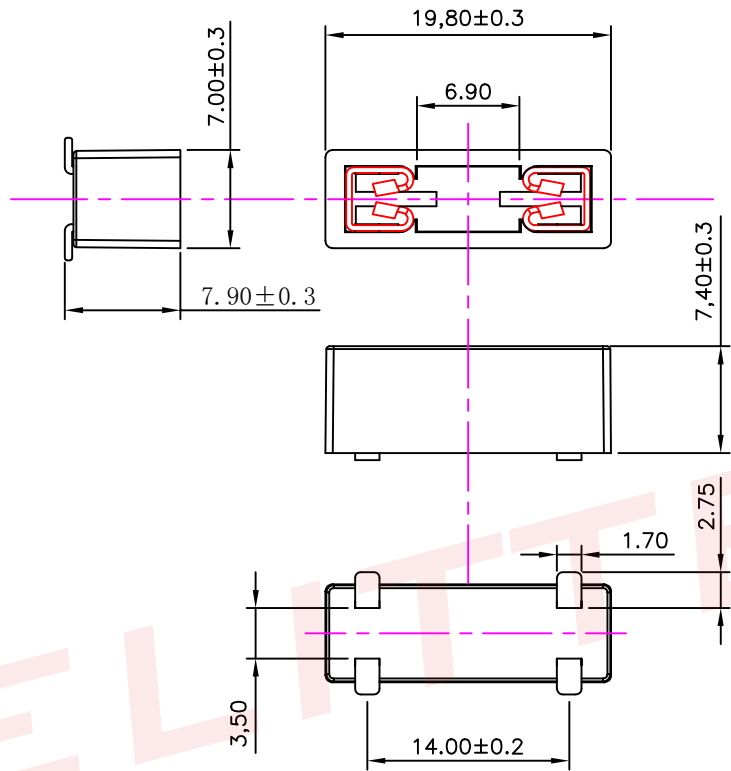

MOUNTING DETAIL:

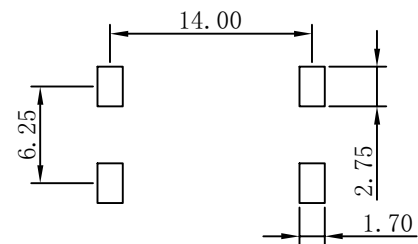

NOTES: UNLESS OTHERWISE SPECIFIED.

- material: Contacts--brass, T=0.4mm;
Insulator--Glass Filled PBT, 94-V0;
- terminal finish: Tin plated;
- removed burrs and sharp edge.
- For MIN/ATO/ATT automotive blade Fuses.
- Suitable rated current: 30A@500VAC.
- Insertion and extraction force: 1Kg Min.
- Dielectric Strength: Min.AC1000V.
- Contact Resistance: Max 50mΩ.
- temperature rise: 50° Max.
- Insulation Resistance At 500V DC: 100MΩ



东莞市市赛力特保险丝制造有限公司
DONGGUAN SELITTEL FUSES MFG CO. , LTD

RoHS COMPLIANT		FUSE CLIP			
UNLESS OTHERWISE STATED		FOR MINI fuse			
WALL THICKNESS	MM				
LINEAR .XX	±0.15	DSGN	Tommy Qiu	08-1-07	SCALE free
LINEAR .XXX	±0.05	DFTS	Tommy Qiu	08-1-07	SHEET 1 OF 1
ANGULAR	±0.5 DEG	CHKD			PART NO.
DRAFT ANGLE/SIDE	0.5 ° MAX	APPD			REV
BURR & FLASH	0.10 MAX				SL-506A-B
BREAK CORNERS	0.20 R. MAX				A
PARTING LINE MISMATCH	0.05 MAX				

12345678