



ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELLI.

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080201-1	ORIGINAL RELEASE		

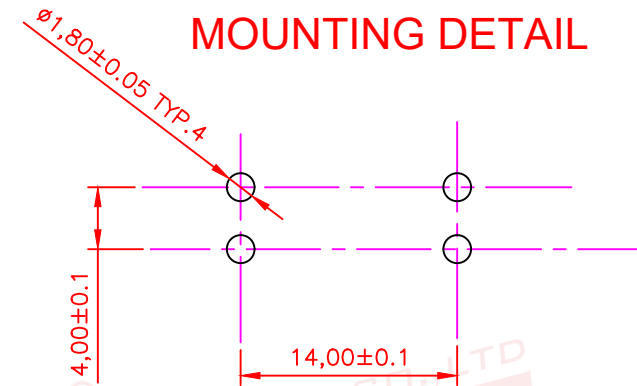

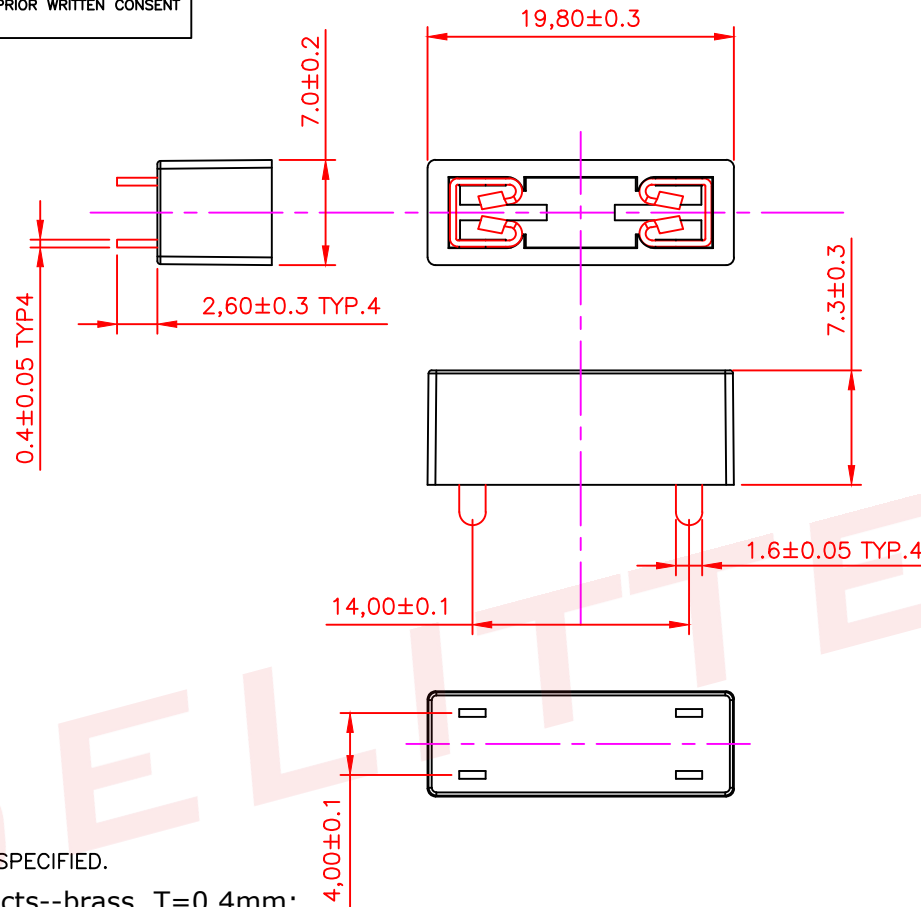

NOTES: UNLESS OTHERWISE SPECIFIED.

- material: Contacts--brass, T=0.4mm;
Insulator--Glass Filled PBT, 94-V0;
- terminal finish: Tin plated;
- removed burrs and sharp edge.
- For MINI automotive blade Fuses.
- Suitable rated current: 30A@500VAC.
- Insertion and extraction force: 1Kg Min.
- Dielectric Strength: Min.AC1000V.
- Contact Resistance: Max 50m ω .
- temperature rise: 50°Max.
- Insulation Resistance At 500V DC: 100M ω



东莞市市赛力特保险丝制造有限公司
DONGGUAN SELITTEL FUSES MFG CO., LTD

RoHS COMPLIANT			FUSE CLIP						
UNLESS OTHERWISE STATED									
WALL THICKNESS		 MM	FOR MINI fuse						
LINEAR	.XX	±0.15 MM							
	.XXX	±0.05 MM							
ANGULAR		±0.5 DEG	DSGN	Tommy Qiu	08-1-07	SCALE			free
DRAFT ANGLE/SIDE		0.5 °MAX	DFTS	Tommy Qiu	08-1-07	SHEET			1 OF 1
BURR & FLASH		0.10 MAX	CHKD			PART NO.			
BREAK CORNERS		0.20 R.MAX	APPD				SL-506A		A
PARTING LINE MISMATCH		0.05 MAX							