ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY AND TO ANDU ELECTRONICS CO,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELLI.

DRAWING REVISIONS

REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080201-1	ORIGINAL RELEASE		

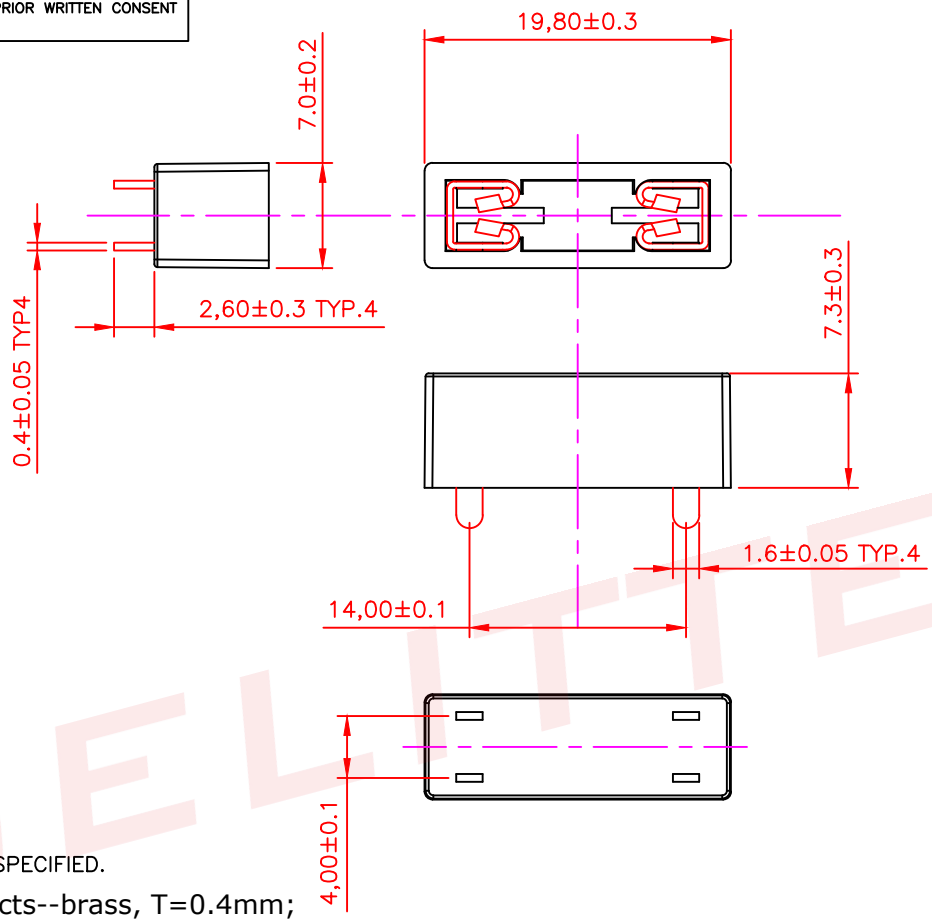

MOUNTING DETAIL

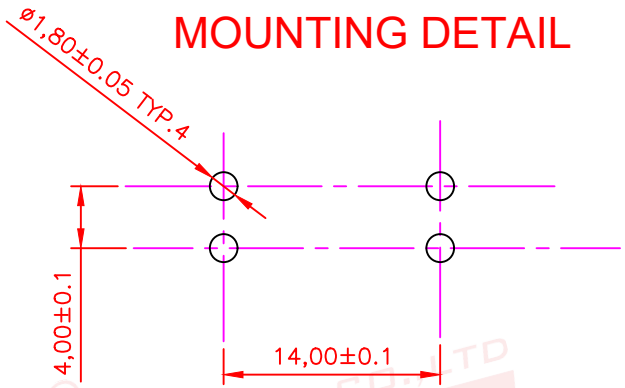

NOTES: UNLESS OTHERWISE SPECIFIED.

1. material: Contacts--brass, T=0.4mm;
   Insulator--Glass Filled PBT, 94-V0;
2. terminal finish: Tin plated;
3. removed burrs and sharp edge.
4. For ATO/287/MINI/297/ATT/LP MINI/891 automotive blade Fuses.
6. Suitable rated current: 30A@500VAC.
7. Insertion and extraction force: 1Kg Min.
8. Dielectric Strength: Min.AC1000V.
9. Contact Resistance: Max 50mω.
10. temperature rise: 50°Max.
11. Insluation Resistence At 500V DC: 100Mω

东莞市市赛力特保险丝制造有限公司
DONGGUAN SELITTEL FUSES MFG CO。， LTD

RoHS COMPLIANT

FUSE CLIP

FOR MINI fuse

UNLESS OTHERWISE STATED		
WALL THICKNESS		MM
LINEAR	.XX	±0.15 MM
	.XXX	±0.05 MM
ANGULAR		±0.5 DEG
DRAFT ANGLE/SIDE		0.5 °MAX
BURR & FLASH		0.10 MAX
BREAK CORNERS		0.20 R.MAX
PARTING LINE MISMATCH		0.05 MAX

DSGN	Tommy Qiu	08-1-07	SCALE	free
DFTS	Tommy Qiu	08-1-07	SHEET	1 OF 1
CHKD			PART NO.	REV
APPD			SL-506A	A