


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY AND TO ANDU ELECTRONICS CO.LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELITEL

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080109-2	ORIGINAL RELEASE		
B	20220328-1	Changed the shape		



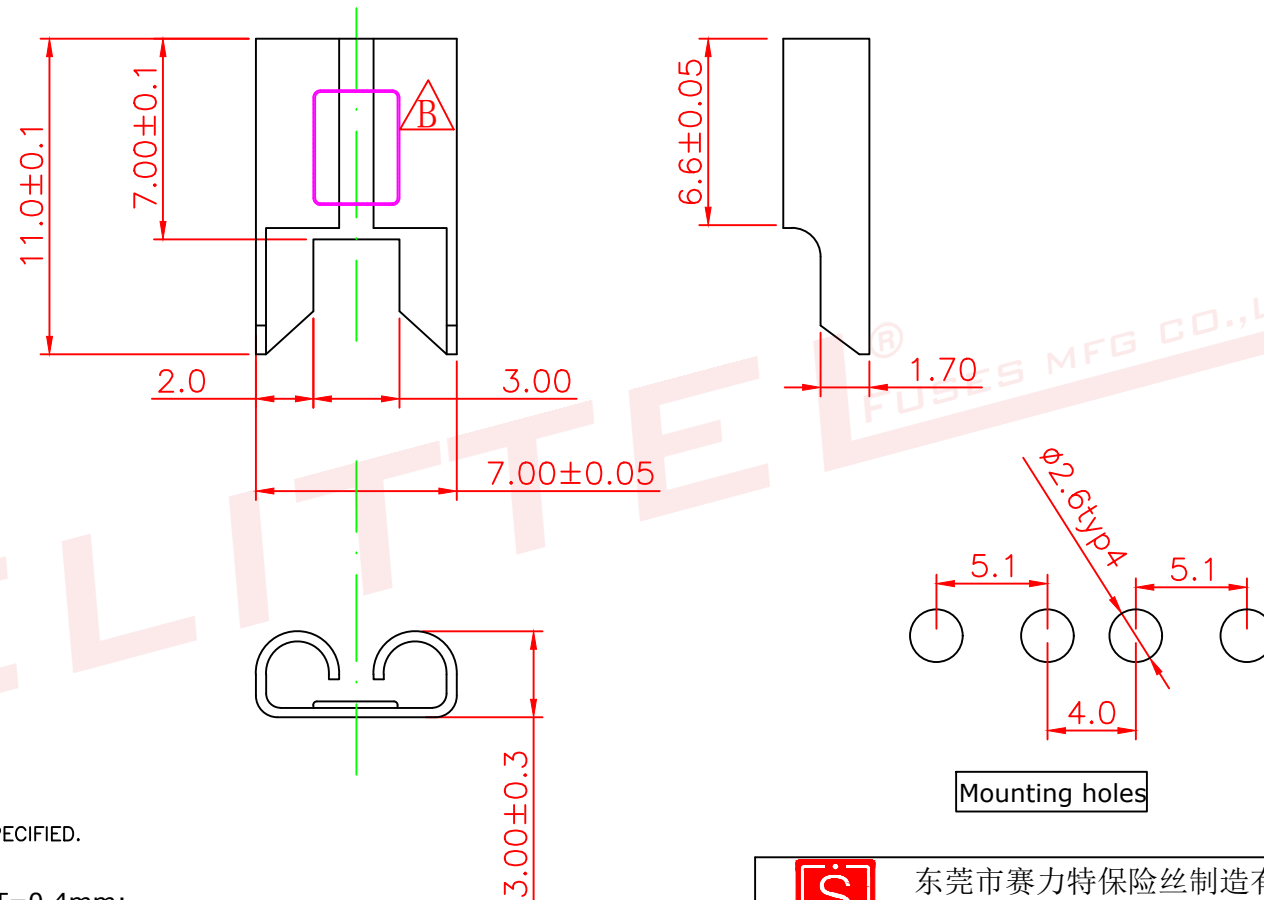

NOTES: UNLESS OTHERWISE SPECIFIED.

1. material: brass, T=0.4mm;
2. finish: Tin plated;
3. removed burrs and sharp edge.
4. Pull force: 1Kg Min.
5. For ATO/ATC/ATN automotive blade Fuses.
6. Suitable rated current: 30A@500VAC.



东莞市赛力特保险丝制造有限公司  
DONGGUAN SELITTEL FUSES MFG CO., LTD

RoHS COMPLIANT			FUSE CLIP FOR ATO/ATC/ATN blade fuse						
UNLESS OTHERWISE STATED									
WALL THICKNESS			MM	DSGN Tommy Qiu 09-1-08 SCALE free 					
LINEAR	.XX	±0.15	MM						
	.XXX	±0.05	MM	DFTS Tommy Qiu 09-1-08 SHEET 1 OF 1					
ANGULAR		±0.5	DEG	CHKD		PART NO.		REV	
DRAFT ANGLE/SIDE			0.5 °MAX	SL-506BT					
BURR & FLASH			0.10 MAX						
BREAK CORNERS			0.20 R.MAX						
PARTING LINE MISMATCH			0.05 MAX						
			APPD	B					