


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU ELECTRONICS CO.LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELL.

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20161125-1	ORIGINAL RELEASE		
B	2017092021	Change the plating		

MOUNTING DETAIL

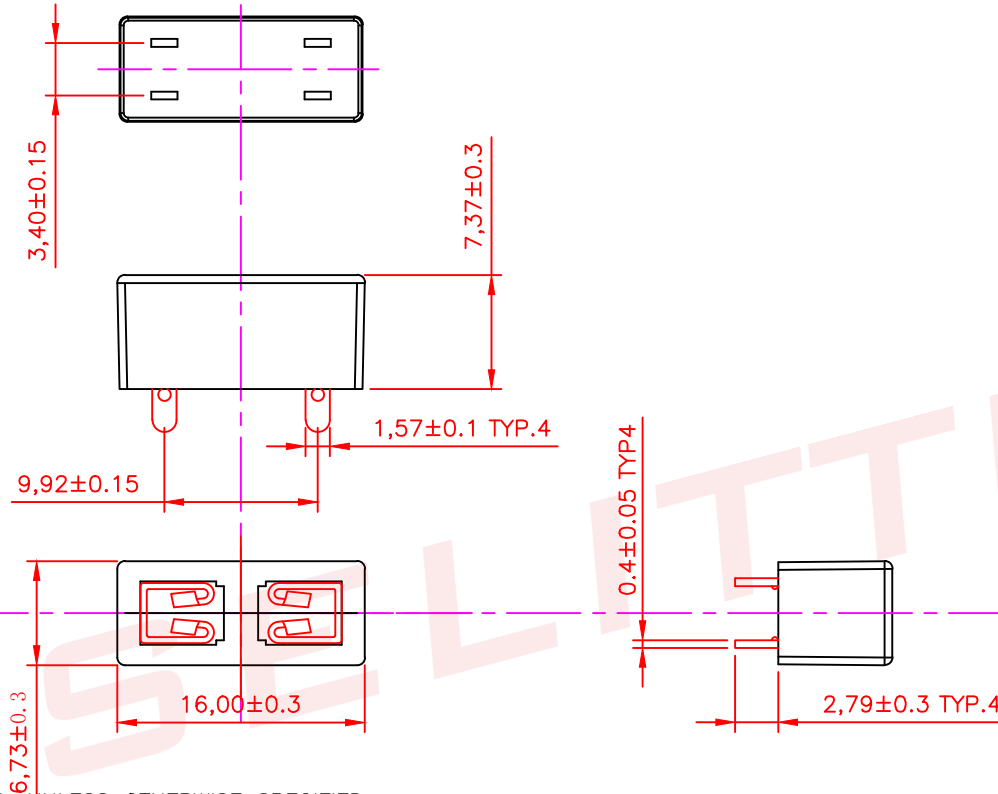

NOTES: UNLESS OTHERWISE SPECIFIED.

- material: Contacts--brass, T=0.4mm;
Insulator--HEAT RESISTANCE NYLON PA46 OR EQUIVALENT;
- terminal finish:
A: underlying---Ni plated, thickness of film >1uM;
B: surface----high temperature Tin plated, thickness of film>3uM;
C: heat resistance: above 400degree
- removed burrs and sharp edge.
- For MINI automotive blade Fuses and PC mounting.
- Suitable rated current: 30A@500VAC.
- Insertion and extraction force: 2Kg Min.





东莞市市赛力特保险丝制造有限公司
DONGGUAN SELITTEL FUSES MFG CO., LTD

ROHS COMPLIANT

UNLESS OTHERWISE STATED

WALL THICKNESS		MM
LINEAR	.XX	±0.15
	.XXX	±0.05
ANGULAR		±0.5
DRAFT ANGLE/SIDE		0.5 °MAX
BURR & FLASH		0.10 MAX
BREAK CORNERS		0.20 R.MAX
PARTING LINE MISMATCH		0.05 MAX

AUTO FUSE HOLDER

IM	DSGN	JOHN	16-11-26	SCALE	free		
CG	DFTS			SHEET	1 OF 1		
X				PART NO.		REV	
AX	CHKD			SL-506B		B	
AX							
AX	APPD						