
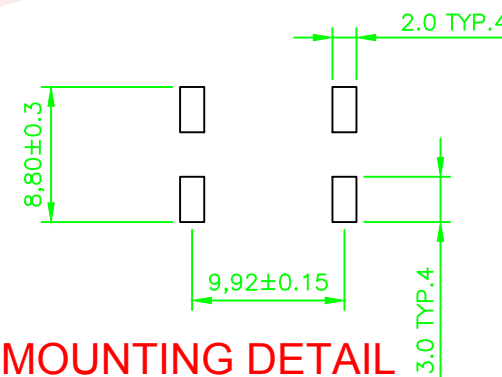


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY AND TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELLER.

## DRAWING REVISIONS

REV	S/N	DESCRIPTION	APPROVED	DATE
A	20171125-1	ORIGINAL RELEASE		
B	2020010821	Change tolerance		
C	2020051821	Change Size		

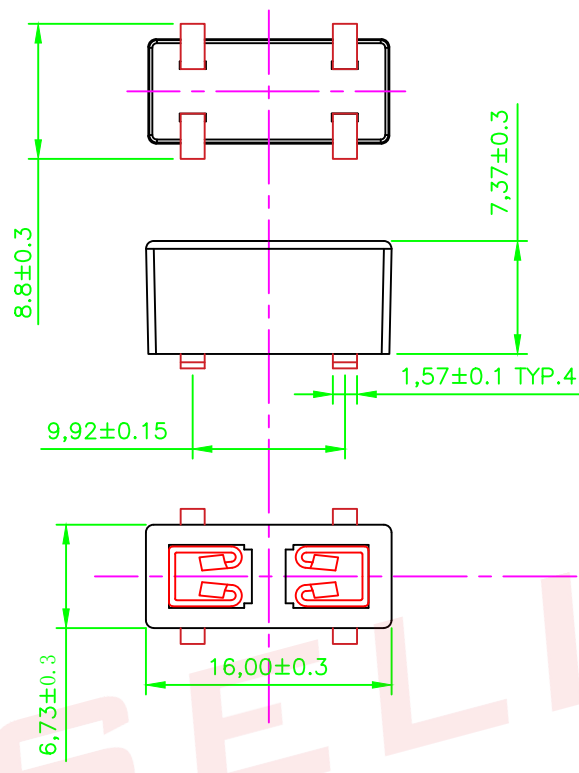

NOTES: UNLESS OTHERWISE SPECIFIED.

- material: Contacts--brass,  $T=0.4\text{mm}$ ;  
Insulator--HEAT RESISTANCE NYLON PA66 94V0 OR EQUIVALENT;
- terminal finish: Tin plated;
- removed burrs and sharp edge.
- For MINI / 297 autofuse / ATM series or equivalent.
- Temperature rating:  $-50^{\circ}\text{C}$  to  $+145^{\circ}\text{C}$ .
- Suitable rated current:  $30\text{A}@500\text{VAC}$ .
- Fully insulated clips to protect fuses against shorting.
- Withstands shock and vibration.
- Monting : SMT.
- Packing: 32mm wide, 16mm pitch, 13inch reel(500PCS per reel).



东莞市市赛力特保险丝制造有限公司  
DONGGUAN SELITTEL FUSES MFG CO., LTD

RoHS COMPLIANT

UNLESS OTHERWISE STATED

WALL THICKNESS	MM
LINEAR .XX	$\pm 0.15$ MM
LINEAR .XXX	$\pm 0.05$ MM
ANGULAR	$\pm 0.5$ DEG
DRAFT ANGLE/SIDE	$0.5^{\circ}$ MAX
BURR & FLASH	$0.10$ MAX
BREAK CORNERS	$0.20$ R.MAX
PARTING LINE MISMATCH	$0.05$ MAX

AUTO FUSE HOLDER

DSGN	JOHN	16-11-26	SCALE	free	
DFTS			SHEET	1 OF 1	
CHKD			PART NO.		REV
APPD			SL-506B-B		C