

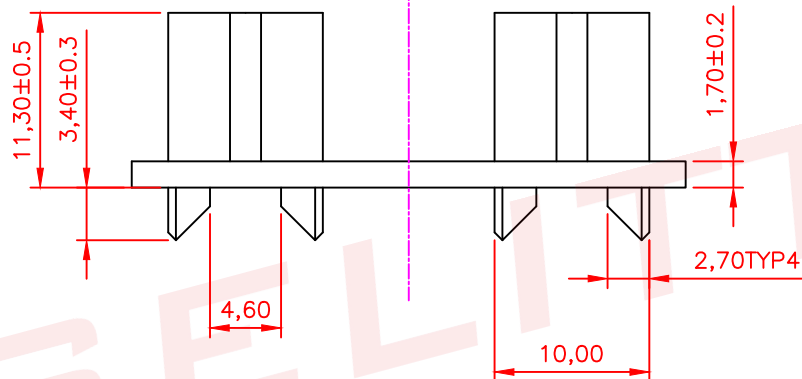


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELLI.

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20161125-1	ORIGINAL RELEASE		

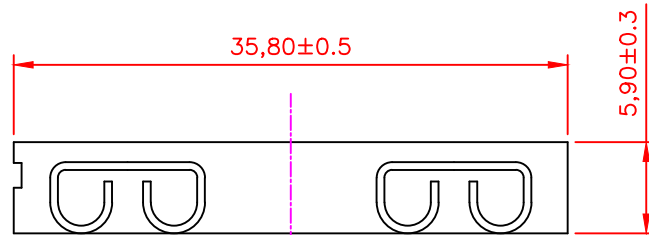

### MOUNTING DETAIL FOR TWO CLIPS

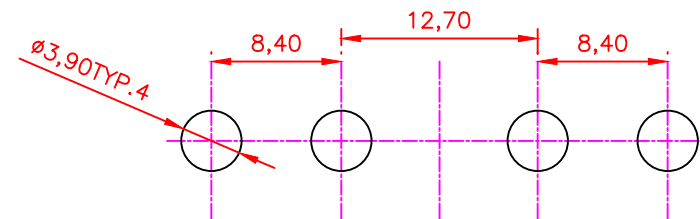

NOTES: UNLESS OTHERWISE SPECIFIED.

- material: Contacts--Copper, T=0.5mm;  
Insulator-- NYLON PA+GF 94V0 OR EQUIVALENT;
- terminal finish: Tin plated;
- removed burrs and sharp edge.
- For MAXI automotive blade Fuses .
- Suitable rated current: 50A@500VAC.
- Temperature rating: -50°C to +145°C.
- Withstands shock and vibration.
- Thru hole PC mountable, maintains position during wave soldering.
- Holds fuse securely even after multiple insertions.



东莞市市赛力特保险丝制造有限公司  
DONGGUAN SELITTEL FUSES MFG CO., LTD

RoHS COMPLIANT

UNLESS OTHERWISE STATED

WALL THICKNESS		MM
LINEAR	.XX	±0.15
	.XXX	±0.05
ANGULAR		±0.5 DEG
DRAFT ANGLE/SIDE		0.5 °MAX
BURR & FLASH		0.10 MAX
BREAK CORNERS		0.20 R.MAX
PARTING LINE MISMATCH		0.05 MAX

AUTO FUSE HOLDER

DSGN	JOHN	16-11-26	SCALE	free	1 OF 1	REV
DFTS			SHEET			
CHKD			PART NO.			
APPD						
SL-506C					A	