
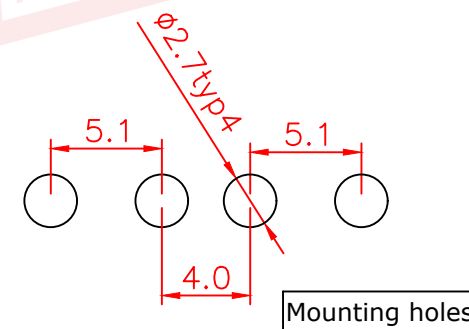



ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY AND TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELL.

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080201-1	ORIGINAL RELEASE		
B	20220328-1	Changed the shape		

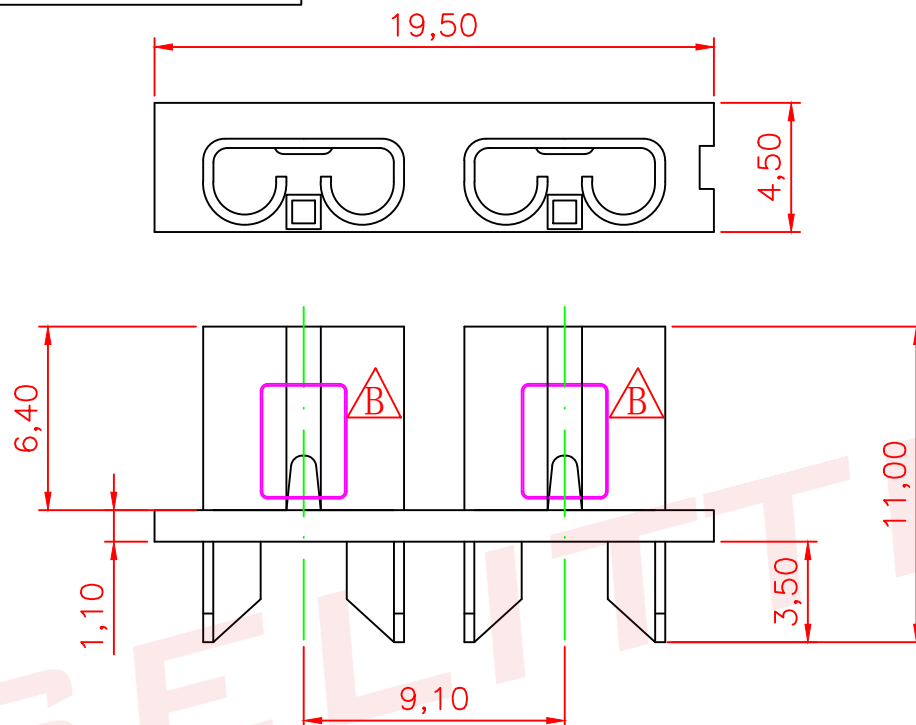

NOTES: UNLESS OTHERWISE SPECIFIED.

1. material: Contacts--brass, T=0.4mm; Insulator--Glass Filled Nylon, 94-V0;
2. terminal finish: Tin plated;
3. removed burrs and sharp edge.
4. For ATO/ATC/ATN/287 automotive blade Fuses.
6. Suitable rated current: 30A@500VAC.
7. Insertion and extraction force: 2Kg Min.
8. Dielectric Strength: Min.AC1000V.
9. Contact Resistance: Max 50m $\omega$ .
10. temperature rise: 50°Max.
11. Insulation Resistance At 500V DC: 100M $\omega$

		东莞市赛力特保险丝制造有限公司 Dongguan SELITTEL FUSES MFG CO., LTD	
RoHS COMPLIANT		FUSE holder	
UNLESS OTHERWISE STATED		FOR ATO ATC 287 fuse	
WALL THICKNESS	MM	DSGN	Tommy Qiu
LINEAR .XX	±0.15	DFTS	Tommy Qiu
LINEAR .XXX	±0.05	CHKD	
ANGULAR	±0.5 DEG	APPD	
DRAFT ANGLE/SIDE	0.5 °MAX	PART NO.	
BURR & FLASH	0.10 MAX	REV	
BREAK CORNERS	0.20 R.MAX	SL-506J-BT	
PARTING LINE MISMATCH	0.05 MAX	B	