


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELLIFUSE.

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080201-1	ORIGINAL RELEASE		

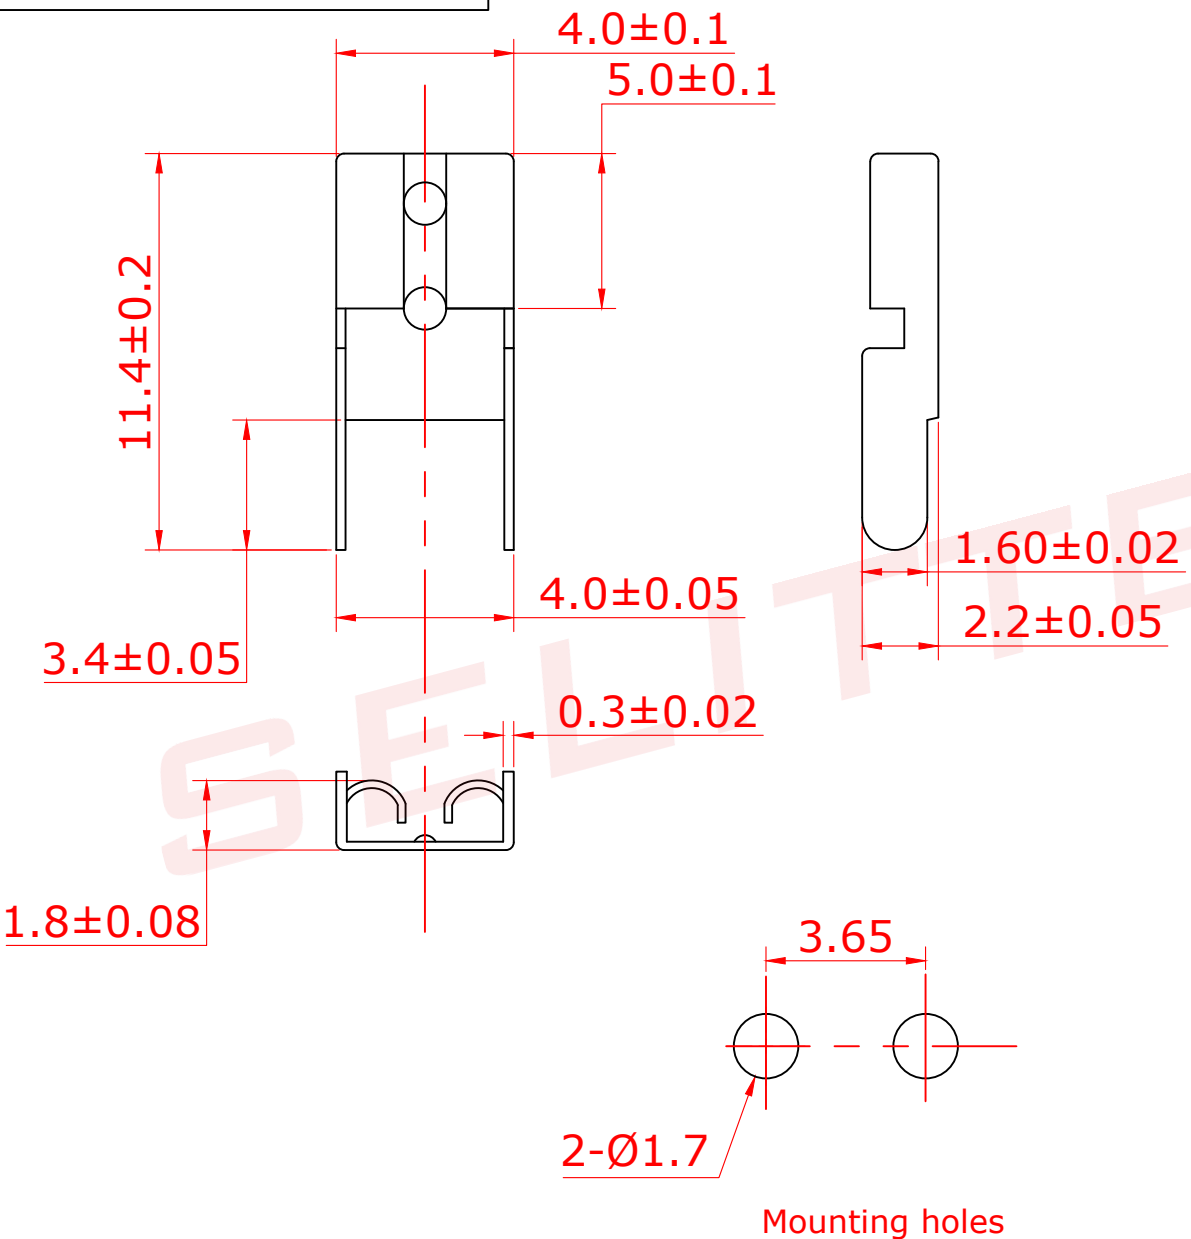

NOTES: UNLESS OTHERWISE SPECIFIED.

- 1. material: Spring brass, T=0.3mm;
- 2. finish: Tin plated;
- 3. removed burrs and sharp edge.
- 4. For mini blade automotive Fuses.
- 6. Suitable rated current: 15A.
- 7. pull power:1Kg Min



东莞市赛力特保险丝制造有限公司
DONGGUAN SELITTEL FUSES MFG CO.,LTD

RoHS COMPLIANT			FUSE CLIP					
UNLESS OTHERWISE STATED			FOR ATS MIN ATM 297 fuse					
WALL THICKNESS		 MM						
LINEAR	.XX	±0.15 MM	DSGN	Tommy Qiu	08-1-07	SCALE	free	
	.XXX	±0.05 MM						
ANGULAR		±0.5 DEG	DFTS	Tommy Qiu	08-1-07	SHEET	1 OF 1	
DRAFT ANGLE/SIDE		0.5 °MAX						
BURR & FLASH		0.10 MAX	CHKD			PART NO.		REV
BREAK CORNERS		0.20 R.MAX						
PARTING LINE MISMATCH		0.05 MAX	APPD			SL-506K		A