
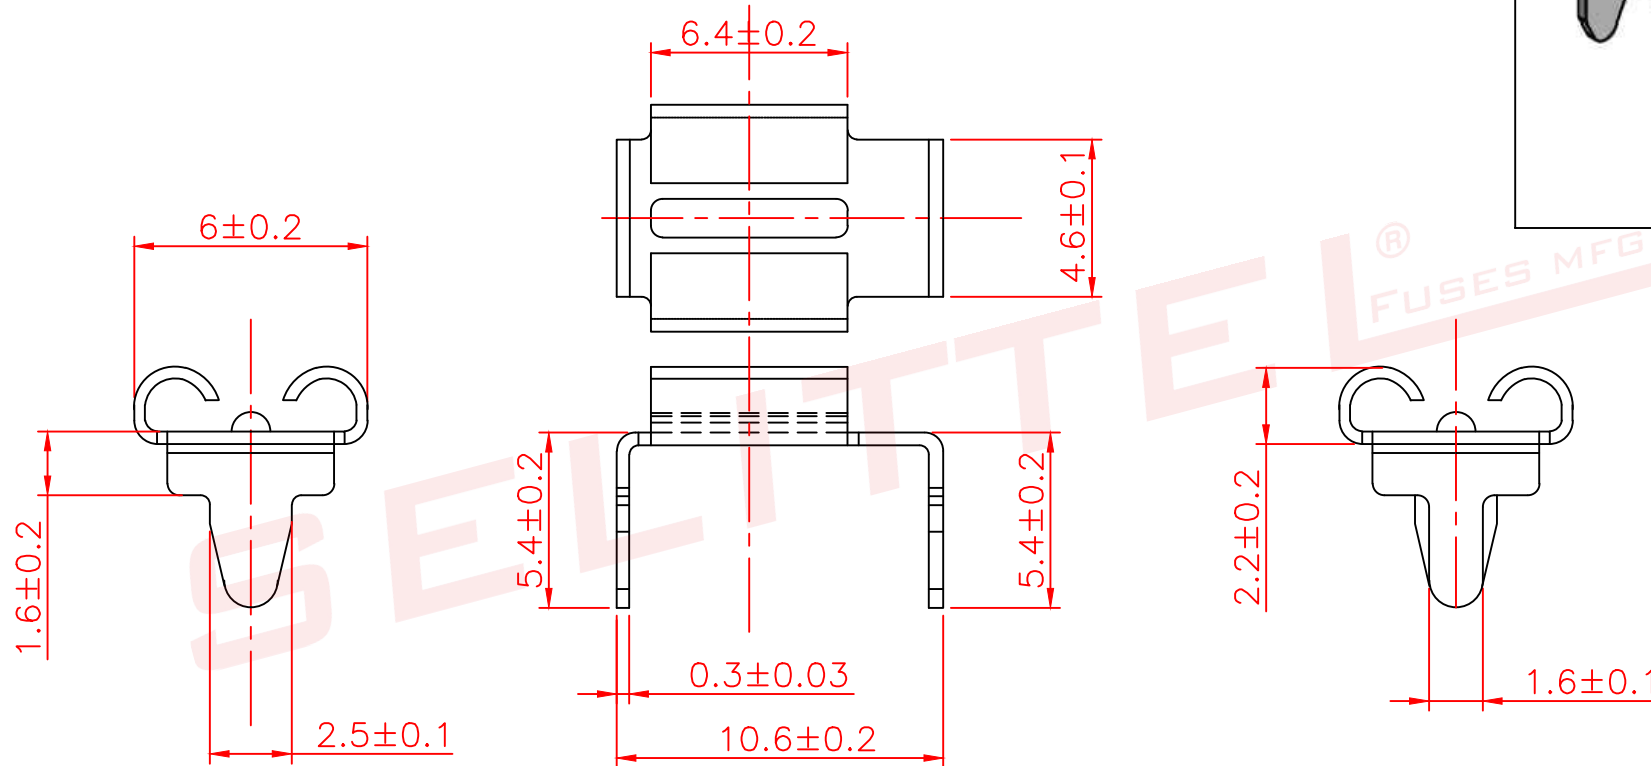
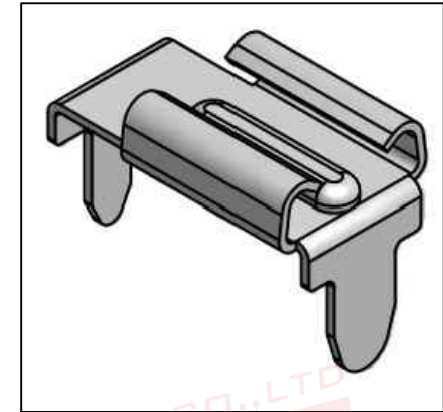


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELL.

DRAWING REVISIONS

REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080201-1	ORIGINAL RELEASE		

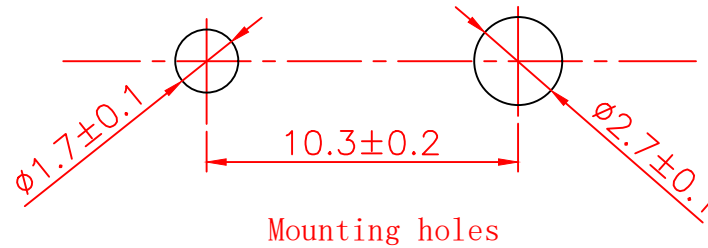

NOTES: UNLESS OTHERWISE SPECIFIED.

1. material: spring brass(C2680), T=0.3mm;
2. finish: Tin plated;
3. removed burrs and sharp edge.
4. For ATO/ATC/ATN/ATQ/ATY/257 blade automotive Fuses.
6. Suitable rated current: 15A.
7. Packing: 5000PCS/bag



东莞市市赛力特电子有限公司
SELITEL ELECTRONIC CO., LTD

RoHS COMPLIANT

UNLESS OTHERWISE STATED

WALL THICKNESS	MM
LINEAR .XX	±0.15
LINEAR .XXX	±0.05
ANGULAR	±0.5
DRAFT ANGLE/SIDE	0.5 °MAX
BURR & FLASH	0.10 MAX
BREAK CORNERS	0.20 R.MAX
PARTING LINE MISMATCH	0.05 MAX

FUSE CLIP

FOR ATO ATC ATN ATQ ATY 257

DSGN	Tommy Qiu	08-1-07	SCALE	free	
DFTS	Tommy Qiu	08-1-07	SHEET	1 OF 1	

PART NO.	REV
SL-506MA	A