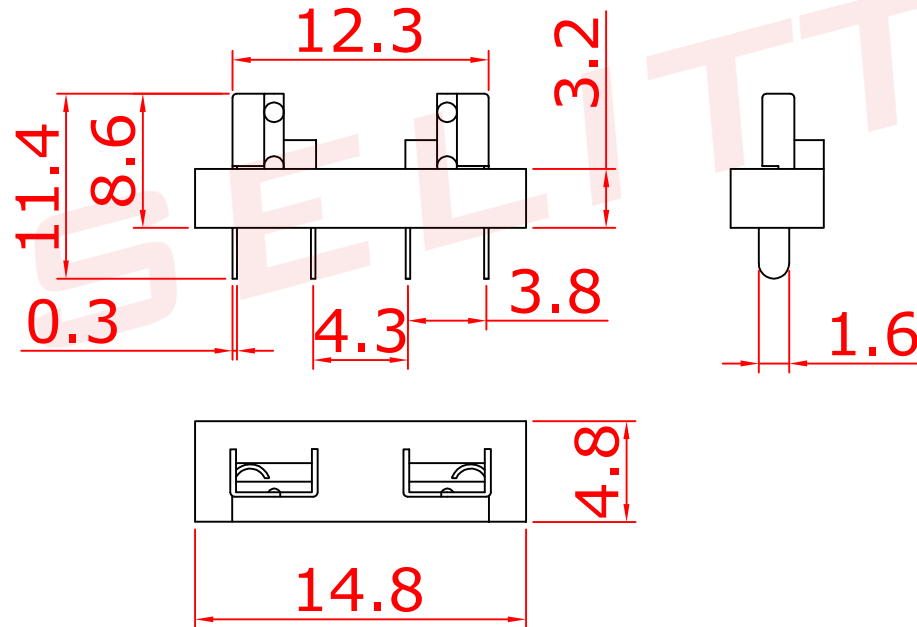
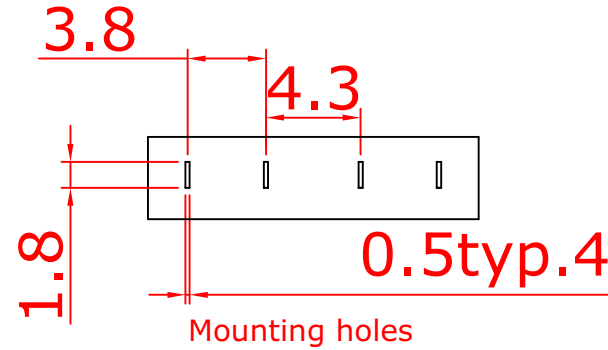


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY AND TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELL.

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080201-1	ORIGINAL RELEASE		
B	20120511-1			
C	20130213-2	Change the size from 11.2 to 11.5MM		





NOTES: UNLESS OTHERWISE SPECIFIED.

1. material: Contacts--brass, T=0.30mm; Insulator--Glass Filled PBT, 94-V0;
2. terminal finish: Tin plated;
3. removed burrs and sharp edge.
4. For Low profile mini blade Fuses 891/BFLP.
6. Suitable rated current: 15A@250VAC.
7. Insertion and extraction force: 1Kg Min.
8. Dielectric Strength: Min.AC500V.
9. Contact Resistance: Max 50m ω .
10. temperature rise: 50°Max.
11. Insulation Resistance At 500V DC: 100M ω



东莞市赛力特保险丝制造有限公司
DONGGUAN SELITTEL FUSES MFG CO.,LTD

RoHS COMPLIANT		FUSE holder									
UNLESS OTHERWISE STATED		FOR ATT fuse									
WALL THICKNESS				MM							
LINEAR	.XX	±0.15		MM		DSGN	Tommy Qiu	08-1-07	SCALE	free	
	.XXX	±0.05		MM							
ANGULAR		±0.5		DEG		DFTS	Tommy Qiu	08-1-07	SHEET	1 OF 1	
DRAFT ANGLE/SIDE		0.5 °MAX									
BURR & FLASH		0.10		MAX		CHKD			PART NO.	REV	
BREAK CORNERS		0.20 R.MAX									
PARTING LINE MISMATCH		0.05		MAX		APPD			SL-506P-B		C