


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY AND TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELLIFUSE.



DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080201-1	ORIGINAL RELEASE		
B	20120511-1			
C	20130213-2	Change the size from 11.2 to 11.5MM		

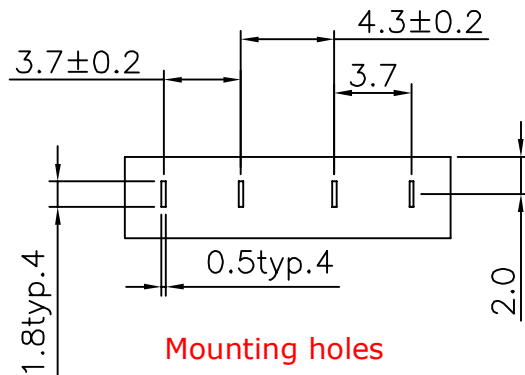

NOTES: UNLESS OTHERWISE SPECIFIED.

1. material: Contacts--brass, T=0.30mm; Insulator--Glass Filled PBT, 94-V0;
2. terminal finish: Tin plated;
3. removed burrs and sharp edge.
4. For MIN/297 automotive blade Fuses.
6. Suitable rated current: 15A@250VAC.
7. Insertion and extraction force: 1Kg Min.
8. Dielectric Strength: Min.AC500V.
9. Contact Resistance: Max 50m ω .
10. temperature rise: 50° Max.
11. Insulation Resistance At 500V DC: 100M ω



东莞市赛力特保险丝制造有限公司
DONGGUAN SELITTEL FUSES MFG CO.,LTD

RoHS COMPLIANT

UNLESS OTHERWISE STATED

WALL THICKNESS		MM		FUSE holder			
LINEAR		.XX	± 0.15	FOR ATS MIN ATM 297 fuse			
ANGULAR		.XXX	± 0.05	DSGN	Tommy Qiu	08-1-07	SCALE free
DRAFT ANGLE/SIDE			± 0.5	DFTS	Tommy Qiu	08-1-07	SHEET 1 OF 1
BURR & FLASH			0.5 ° MAX	CHKD			PART NO.
BREAK CORNERS			0.10 MAX	APPD			REV
PARTING LINE MISMATCH			0.20 R.MAX				SL-506P
			0.05 MAX				C

