

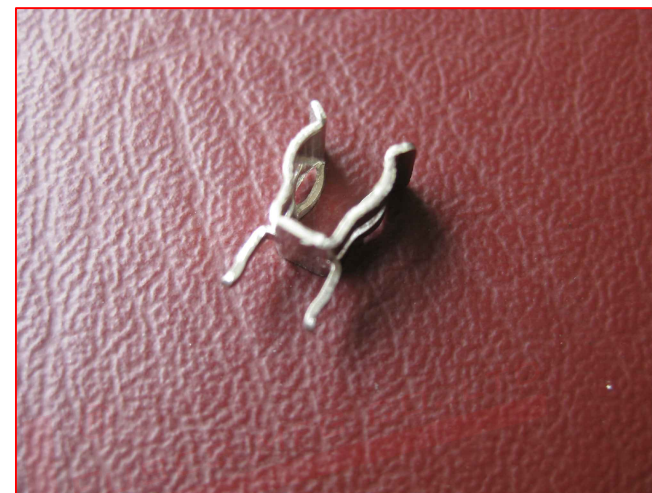


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY SELLI ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY AND TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELLI.

# DRAWING REVISIONS

REV	S/N	DESCRIPTION	APPROVED	DATE
A	20090107-1	ORIGINAL RELEASE		

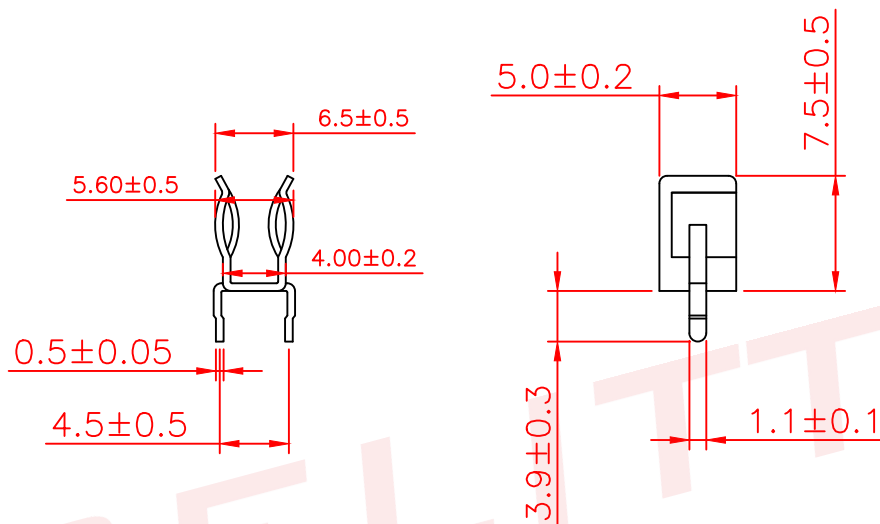

Mounting holes

NOTES: UNLESS OTHERWISE SPECIFIED.

1. material: brass, T=0.50mm;
2. finish: Ni plated;
3. removed burrs and sharp edge.
4. For 5.2dia. Fuses.
6. Suitable rated current: 15A.
7. RoHS COMPLIANT.
8. Packing: 1000PCS/bag.



东莞市赛力特保险丝制造有限公司  
DONGGUAN SELITTEL FUSES MFG CO.,LTD

RoHS COMPLIANT

UNLESS OTHERWISE STATED

WALL THICKNESS	MM
LINEAR .XX	±0.15
LINEAR .XXX	±0.05
ANGULAR	±0.5 DEG
DRAFT ANGLE/SIDE	0.5 °MAX
BURR & FLASH	0.10 MAX
BREAK CORNERS	0.20 R.MAX
PARTING LINE MISMATCH	0.05 MAX

FUSE CLIP  
FOR  $\phi 5.2$  tube fuse

M	DSGN	Tommy Qiu	08-1-07	SCALE	free	
G	DFTS	Tommy Qiu	08-1-07	SHEET	1 OF 1	
X	CHKD			PART NO.		
X	APPD			SL-520-11		
X						A