


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF ANDU.

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20090107-1	ORIGINAL RELEASE		



Mounting holes

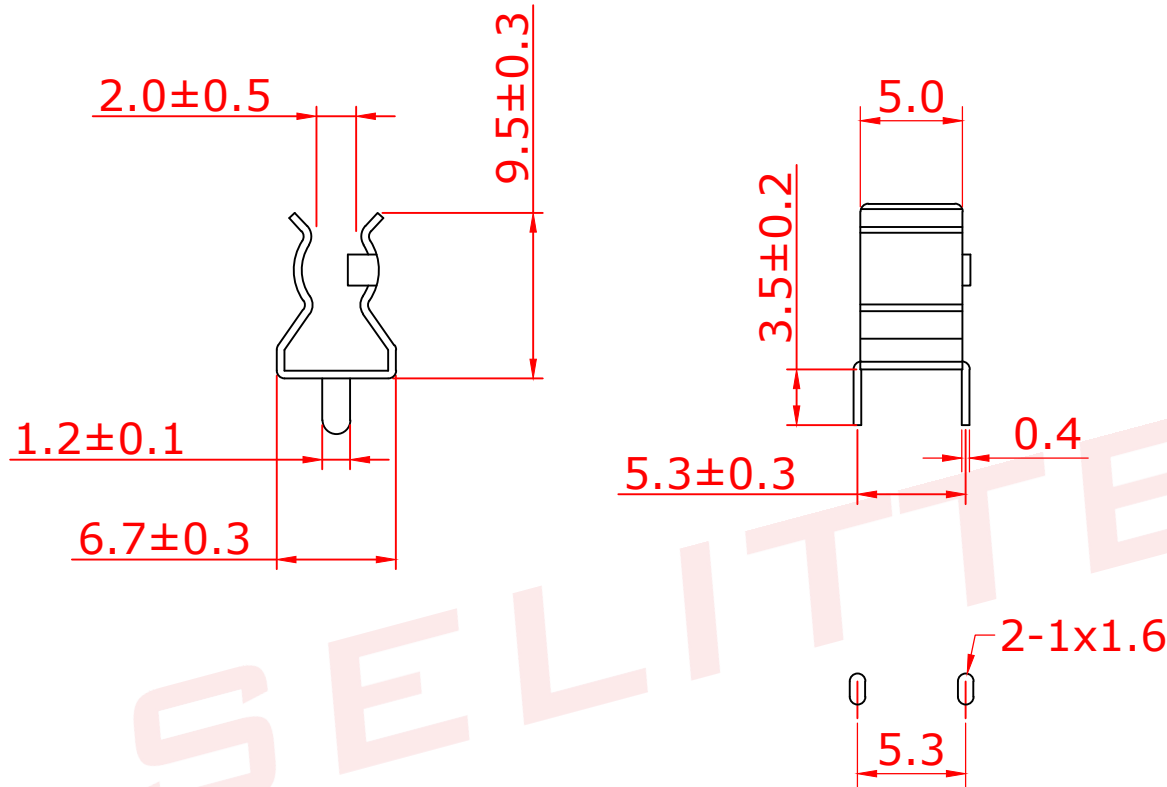



NOTES: UNLESS OTHERWISE SPECIFIED.

1. material: brass, T=0.40mm;
2. finish: Ni plated;
3. removed burrs and sharp edge.
4. For 5.2dia. Fuses.
6. Suitable rated current: 15A.
7. RoHS COMPLIANT.
8. Packing: 2000PCS/bag, 40000PCS/carton box.



东莞市赛力特保险丝制造有限公司
DONGGUAN SELITTEL FUSES MFG CO.,LTD

RoHS COMPLIANT			FUSE CLIP FOR $\phi 5.2$ tube fuse					
UNLESS OTHERWISE STATED								
WALL THICKNESS		 MM	DSGN	Tommy Qiu	08-1-07	SCALE	free	
LINEAR	.XX	± 0.15 MM						
	.XXX	± 0.05 MM						
ANGULAR		± 0.5 DEG	DFTS	Tommy Qiu	08-1-07	SHEET	1 OF 1	
DRAFT ANGLE/SIDE		0.5 °MAX						
BURR & FLASH		0.10 MAX	CHKD			PART NO.		REV
BREAK CORNERS		0.20 R.MAX						
PARTING LINE MISMATCH		0.05 MAX	APPD			SL-520-1		A