



ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELLER.

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20090107-1	ORIGINAL RELEASE		

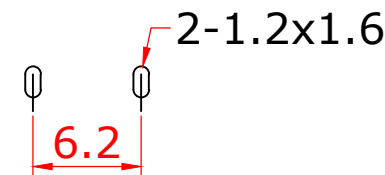

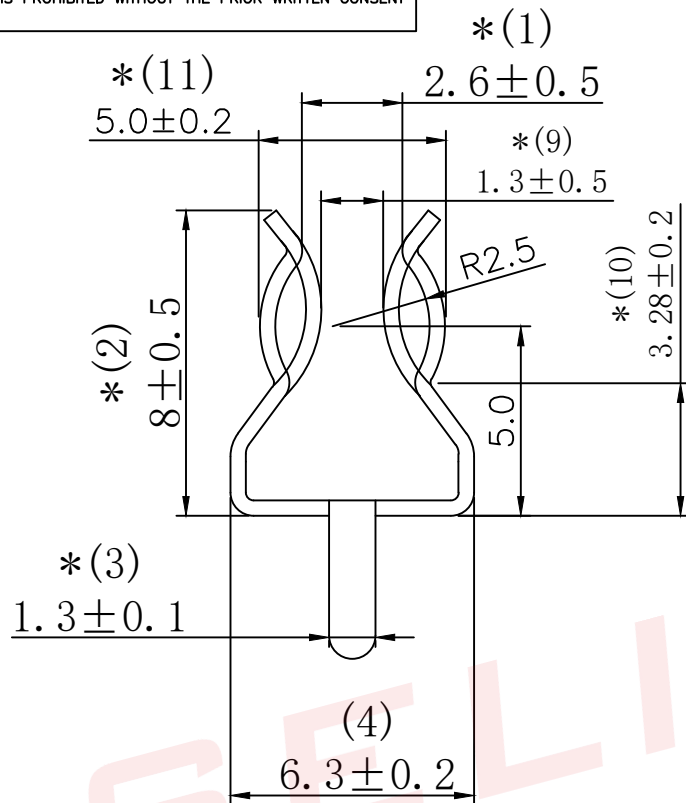


Mounting holes

NOTES: UNLESS OTHERWISE SPECIFIED.

1. material: H65 brass, T=0.5mm;
2. finish: Ni plated/Tin plated(镀镍锡) ;
3. removed burrs and sharp edge.
4. For 5.2dia. Fuses.
6. Suitable rated current: 15A.



东莞市市赛力特保险丝制造有限公司  
DONGGUAN SELITTEL FUSES MFG CO., LTD

RoHS COMPLIANT			FUSE CLIP FOR $\phi 5.2$ tube fuse												
UNLESS OTHERWISE STATED															
WALL THICKNESS		 MM	DSGN			Tommy Qiu		08-1-07		SCALE		free		 	
LINEAR	.XX	±0.15 MM													
	.XXX	±0.05 MM													
ANGULAR		±0.5 DEG	DFTS		Tommy Qiu		08-1-07		SHEET		1 OF 1				
DRAFT ANGLE/SIDE		0.5 °MAX													
BURR & FLASH		0.10 MAX	CHKD						PART NO.		REV				
BREAK CORNERS		0.20 R.MAX													
PARTING LINE MISMATCH		0.05 MAX	APPD						SL-520-B		A				