


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU TO ANDU ELECTRONICS CO.LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELL.


DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080212-03	ORIGINAL RELEASE		

NOTES: UNLESS OTHERWISE SPECIFIED.

1. Apply for 6.35x31.75mm/30MM tube fuse.
2. Max rating: 20A 250VAC

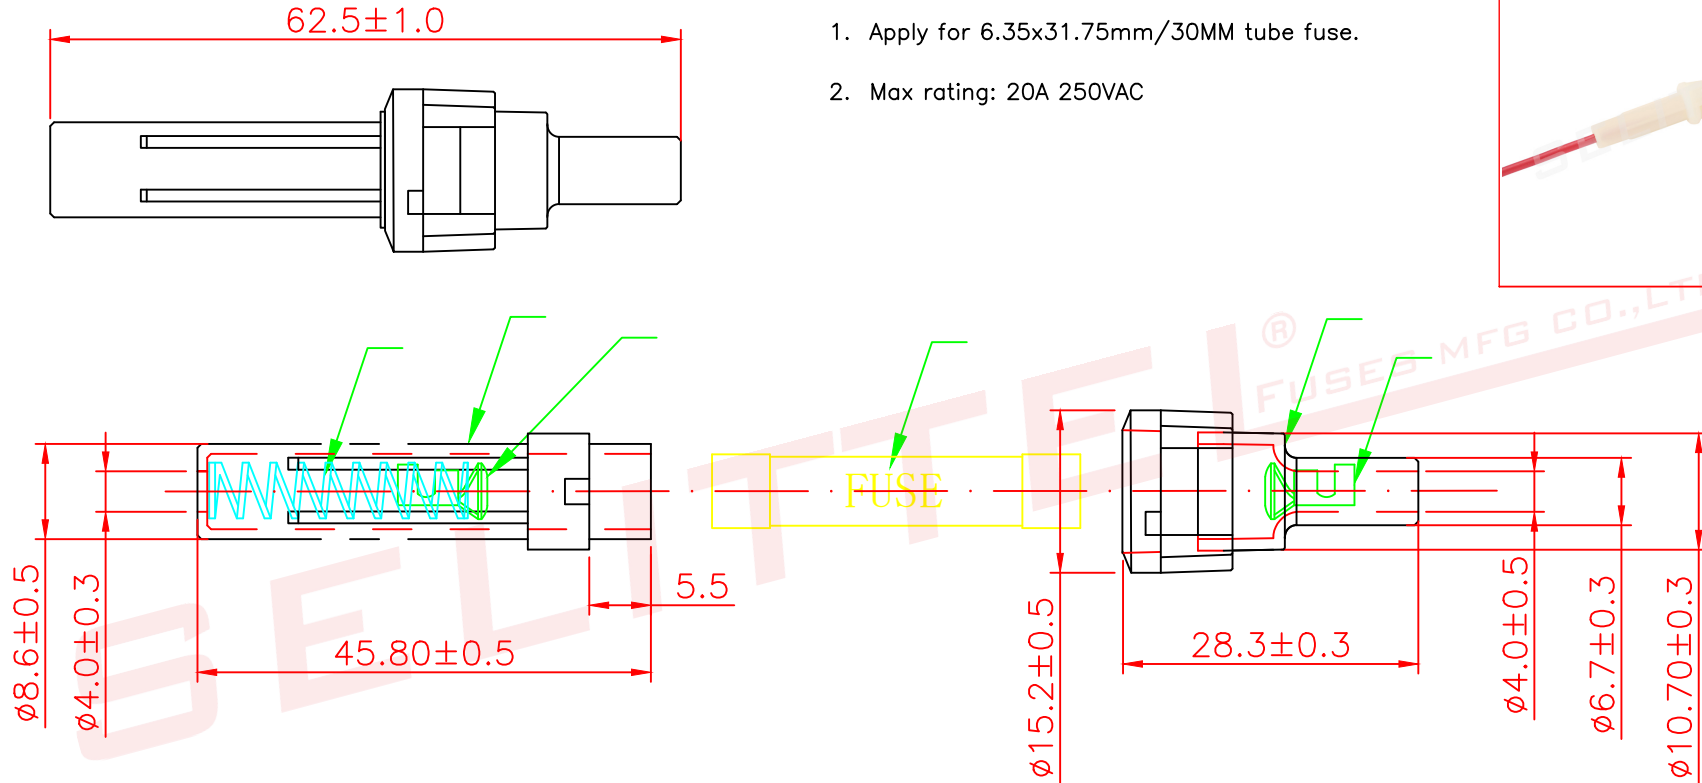

5		6.35X32/30MM TUBE FUSE	1	N/A	
4	S-520-1	SPRING	2	SPRING STEEL	Ni plated
3	SL-842-N	CONTACT	2	BRASS	NATURE
2	SL-630-6	BOTTOM CASE	1	PA	nature 94-V0
1	SL-630-7	TOP CASE	1	PA	Nature 94-V0
ITEM	P/N	DESCRIPTION	QTY	Material	REMARKS

 东莞市赛力特保险丝制造有限公司 DONGGUANG SELITTEL FUSES MFG CO., LTD					
RoHS COMPLIANT UNLESS OTHERWISE STATED			SCREW MOUNTING INLINE FUSEHOLDER TOP CASE FOR 6.4X32MM/30MM TUBE FUSE		
WALL THICKNESS		MM	DSGN	Peter	07-12-15
LINEAR	.XX	±0.15	SCALE	free	
	.XXX	±0.05	DFTS	Jimmy	07-12-15
ANGULAR		±0.5 DEG	SHEET	1 OF 1	
DRAFT ANGLE/SIDE		0.5 ° MAX	CHKD		
BURR & FLASH		0.10 MAX	APPD		
BREAK CORNERS		0.20 R. MAX	PART NO.		REV
PARTING LINE MISMATCH		0.05 MAX	SL-702B		A