


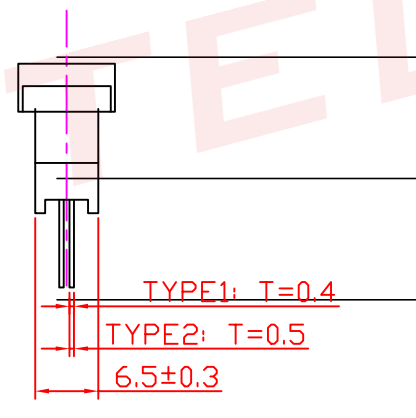
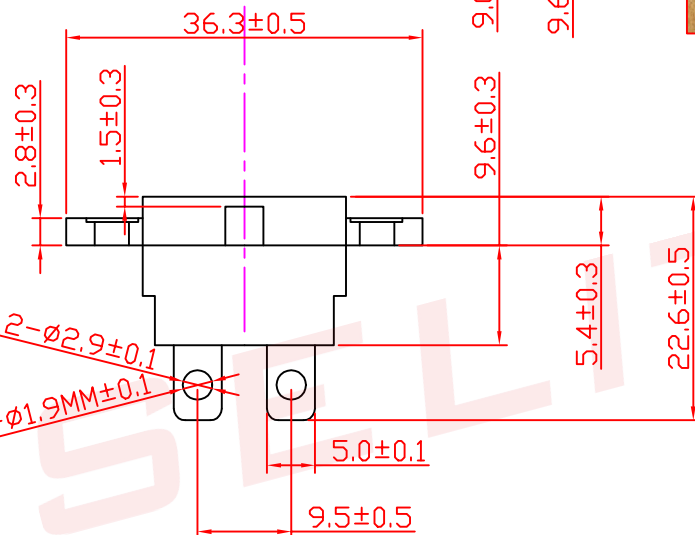
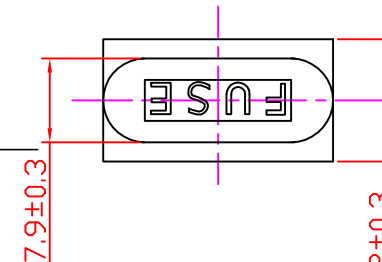
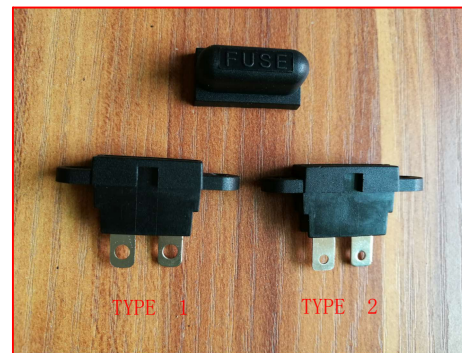


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU TO SELLI ELECTRONICS CO.LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELLI

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20070822-11	ORIGINAL RELEASE		

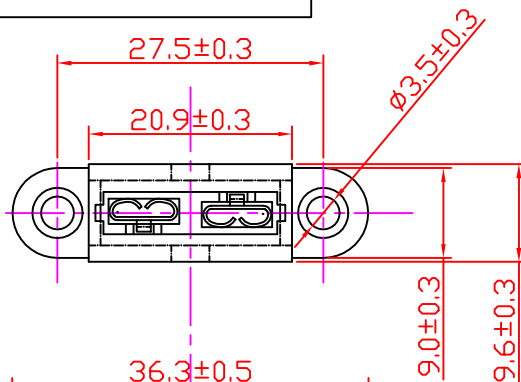

Notes,

- Material: Base: Black PA, 94-V0.
TYPE 1: Terminal: Brass T=0.4MM; D=2.9MM
TYPE 2: Terminal: Brass T=0.5MM; D=1.9MM
- Applicable for ATO/ATN/ATY/ATU Automotive Blade Type Fuse.
- Electrical Rating: Max 40A 32V.

		东莞市赛力特保险丝制造有限公司 DONGGUAN SELITTEL FUSES MFG CO., LTD			
RoHS COMPLIANT UNLESS OTHERWISE STATED		Blade Fuseholder			Customer
WALL THICKNESS LINEAR .X ±0.5 MM .XX ±0.25 MM ANGULAR ±0.5 DEG DRAFT ANGLE/SIDE 0.5 *MAX BURR & FLASH 0.10 MAX BREAK CORNERS 0.20 R.MAX PARTING LINE MISMATCH 0.05 MAX		For ATO Blade fuse			
DSGN	Tommy Qiu	07-12-08	SCALE	free	
DFTS	Tommy Qiu	07-12-08	SHEET	1 OF	
CHKD			PART NO.		REV
APPD			SL-703C		A