



ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY AND TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELL

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080210-03	ORIGINAL RELEASE		
B	2011081001	Change the wire lenght		

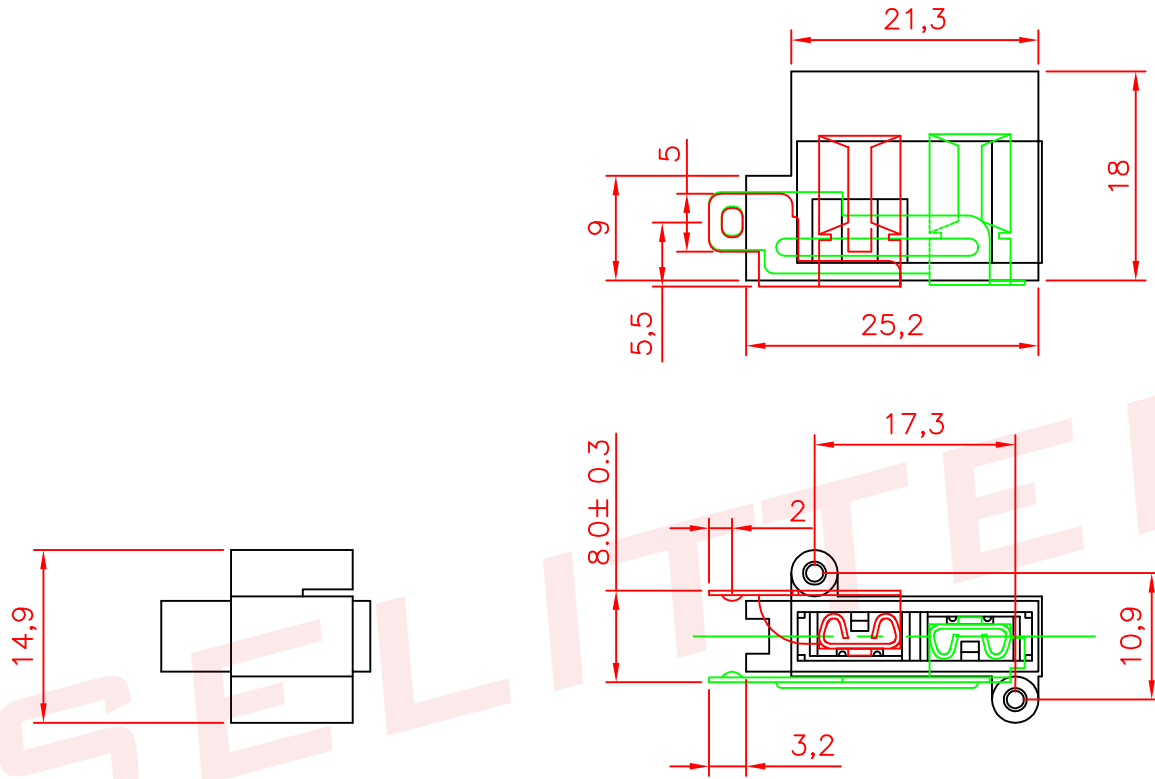

NOTES: UNLESS OTHERWISE SPECIFIED.

1. Applicable: For ATO-N Fuse.
2. Electrical: Rated for current up to 30A32V.
3. Insulating body: PA.
4. Contact: Brass with Tin plated.



东莞市赛力特保险丝制造有限公司
SELITTEL FUSES MFG CO., LTD

ROHS COMPLIANT			FUSEHOLDER			
UNLESS OTHERWISE STATED			FOR ATO-N			
WALL THICKNESS		MM				
LINEAR	.XX	±0.15	MM			
	.XXX	±0.05	MM			
ANGULAR	±0.5		DEG			
DRAFT ANGLE/SIDE	0.5		°MAX	DSGN	Tommy Qiu	07-12-08
BURR & FLASH	0.10		MAX	DFTS	Tommy Qiu	07-12-08
BREAK CORNERS	0.20		R.MAX	CHKD		
PARTING LINE MISMATCH	0.05		MAX	APPD		
			PART NO.		REV	
			SL-703E		B	