


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY AND TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELL.

DRAWING REVISIONS

REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080212-01	ORIGINAL RELEASE		
B	2021092721	Add the Voltage		

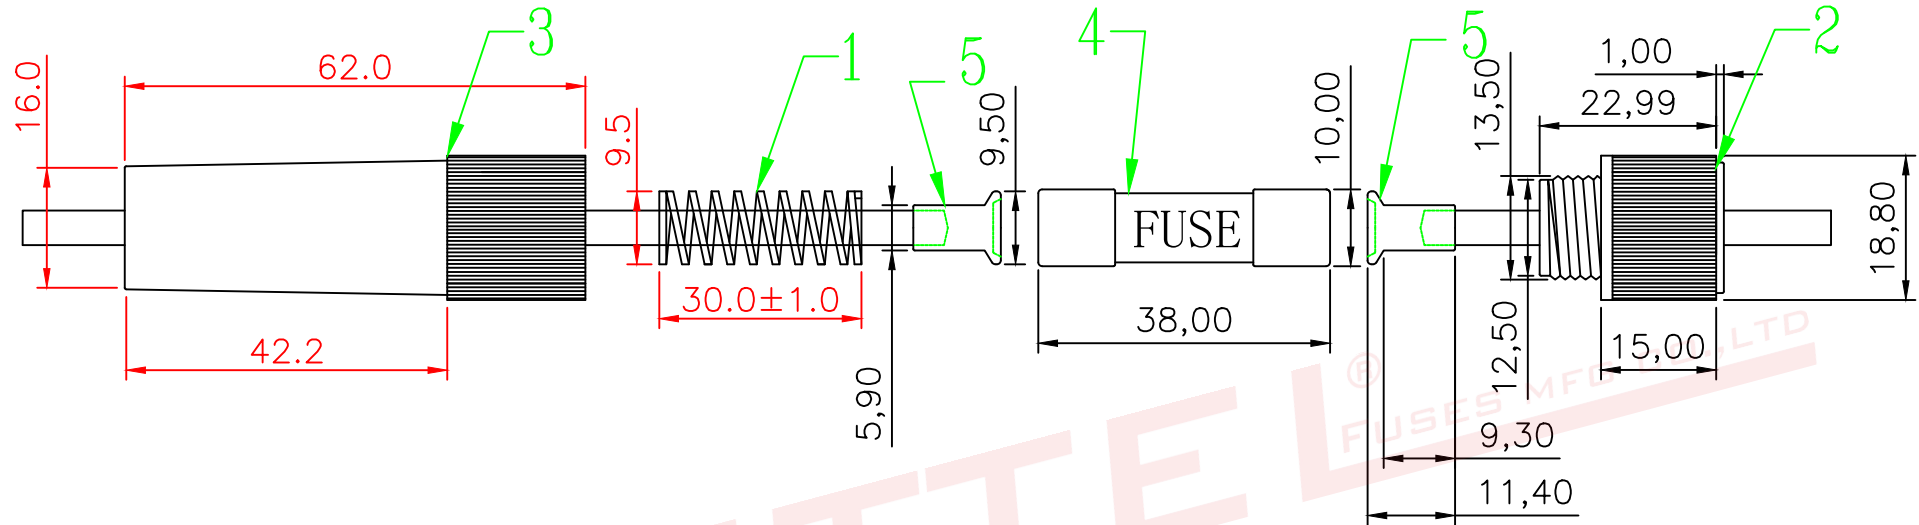

NOTES: UNLESS OTHERWISE SPECIFIED.

1. APPLY FOR 10X38MM INLINE FUSEHOLDER.

2. RATING CURRENT: 60A1000VAC.

bakelite



东莞市赛力特保险丝制造有限公司
Dongguan SELITTEL Fuses MFG CO., LTD

4		10X38MM TUBE FUSE	1	N/A	
5	CN-1	CONTACT	1	BRASS	NATURE
3	FH-05-2	BOTTOM CASE	1	bakelite	BLACK
2	FH-05-1	TOP CASE	1	bakelite	BLACK
1	S-103801	Spring	1	SPRING STEEL	Ni PLATED

RoHS COMPLIANT		FUSEHOLDER							
UNLESS OTHERWISE STATED									
WALL THICKNESS		FOR 10X38MM fuse							
LINEAR	.XX	±0.15	MM	DSGN	Tommy Qiu	07-12-08	SCALE	free	
	.XXX	±0.05							
ANGULAR	±0.5		DEG	DFTS	Tommy Qiu	07-12-08	SHEET	1 OF 1	
DRAFT ANGLE/SIDE		0.5 °MAX		CHKD			PART NO.		REV
BURR & FLASH		0.10 MAX							
BREAK CORNERS		0.20 R.MAX		APPD			SL-705A		B
PARTING LINE MISMATCH		0.05 MAX							