



ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELLI.

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080212-03	ORIGINAL RELEASE		

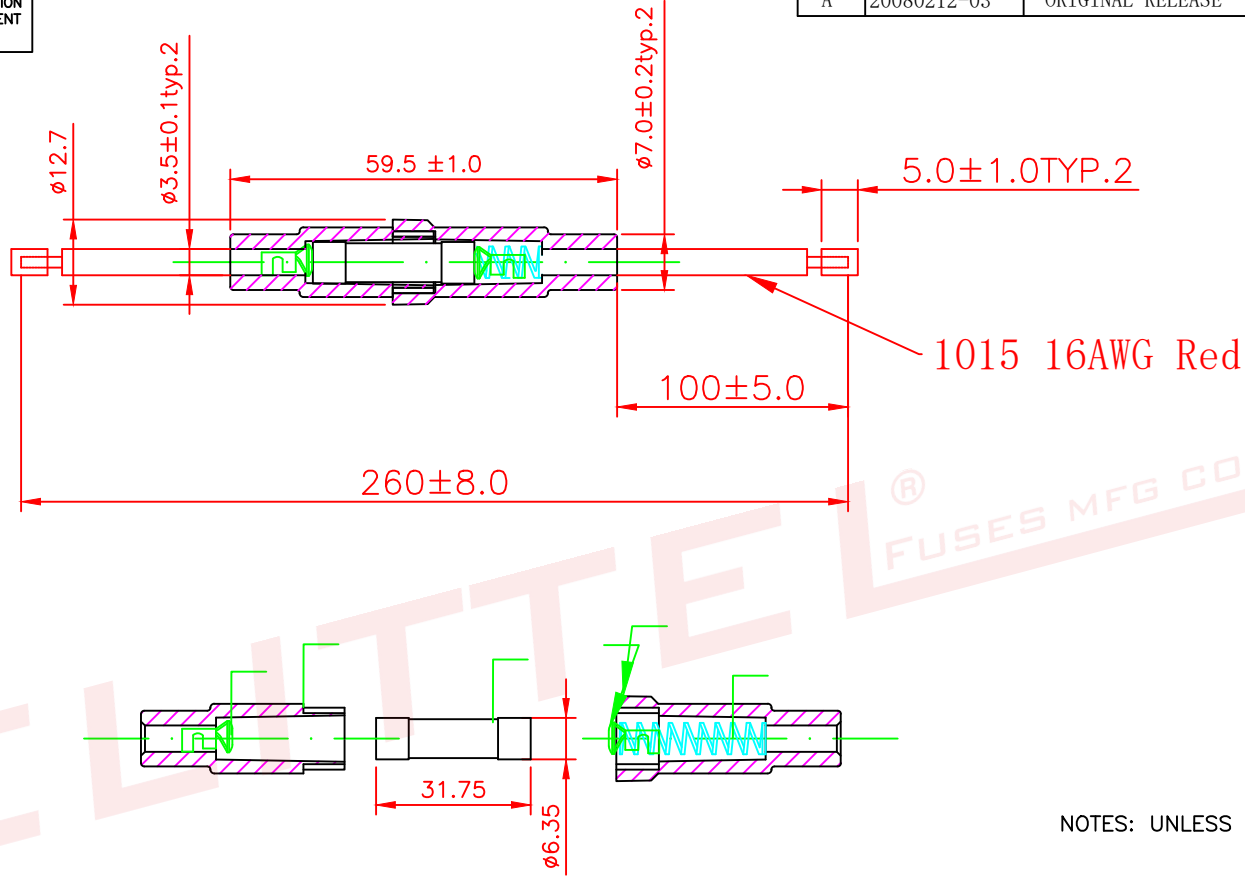


- NOTES: UNLESS OTHERWISE SPECIFIED.
- 1. Apply for 6x30mm tube fuse.
 - 2. Max rating: 15A 250VAC

5		Wire	2	1015 16AWG	Red
5		6X30MM TUBE FUSE	1	N/A	
4	S-630-1	SPRING	1	SPRING STEEL	Ni PLATED
3	SL-841-N	CONTACT	2	BRASS	NATURE
2	SL-630-2	BOTTOM CASE	1	PA	BLACK
1	SL-630-1	TOP CASE	1	PA	BLACK
ITEM	P/N	DESCRIPTION	QTY	Material	REMARKS



东莞市赛力特保险丝制造有限公司
DONGGUANG SELITTEL FUSES MFG CO., LTD

RoHS COMPLIANT		SCREW MOUNTING INLINE FUSEHOLDER TOP CASE			
UNLESS OTHERWISE STATED		FOR 6X30MM TUBE FUSE			
WALL THICKNESS					
LINEAR	. XX	±0.15			
	. XXX	±0.05			
ANGULAR		±0.5		DEG	
DRAFT ANGLE/SIDE		0.5		° MAX	
BURR & FLASH		0.10		MAX	
BREAK CORNERS		0.20		R. MAX	
PARTING LINE MISMATCH		0.05		MAX	
DSGN	Tommy Qiu	07-12-08	SCALE	free	
DFTS	Tommy Qiu	07-12-08	SHEET	1 OF 1	
CHKD			PART NO.		
APPD			SL-705D-260-16		REV A