

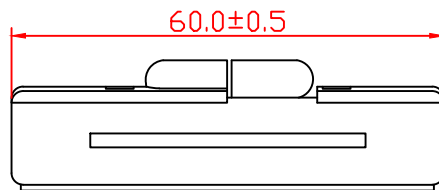
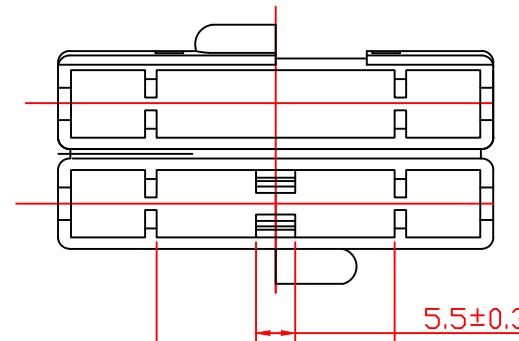


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF Sellifuse

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20070822-11	ORIGINAL RELEASE		

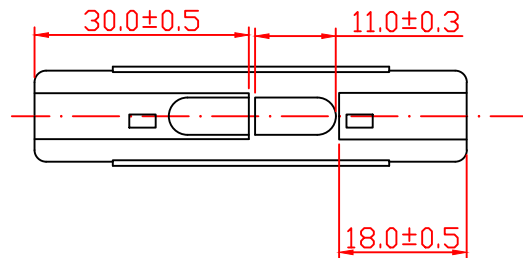

Notes,

1. Material: Insulating Body: PA; Contacts: Brass;
2. Applicable for 6X30MM tube fuse
3. Electrical Rated for currents up to 20A 250V.
4. With wire sizes or lengths
Available on customer special order.
5. Color: natural/WHITE.

S 东莞市赛力特保险丝制造有限公司 DONGGUAN SELITTEL FUSE MFG CO., LTD										
RoHS COMPLIANT			Inline Fuseholder					Customer		
UNLESS OTHERWISE STATED										
WALL THICKNESS			For 6X30MM fuse							
LINEAR	.X	±0.5	MM	DSGN	Tommy Qiu	07-12-08	SCALE	free		
	.XX	±0.25	MM							
ANGULAR			±0.5	DEG	DFTS	Tommy Qiu	07-12-08	SHEET	1 OF	
DRAFT ANGLE/SIDE			0.5	° MAX						
BURR & FLASH			0.10	MAX	CHKD			PART NO.		REV
BREAK CORNERS			0.20	R.MAX						
PARTING LINE MISMATCH			0.05	MAX	APPD			SL-706		A