


ALL INFORMATION CONTAINED OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED CONFIDENTIAL AND PROPRIETARY BY ANDU ELECTRONICS CO.,LTD. ALL DESIGN, MANUFACTURING, USE, REPRODUCTION, AND ALL SALES RIGHTS, ARE EXPRESSLY RESERVED BY ANDU TO ANDU ELECTRONICS CO.,LTD. AND COMMUNICATION OF THIS INFORMATION TO OTHERS IS PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF SELITTEL.


DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20070822-11	ORIGINAL RELEASE		

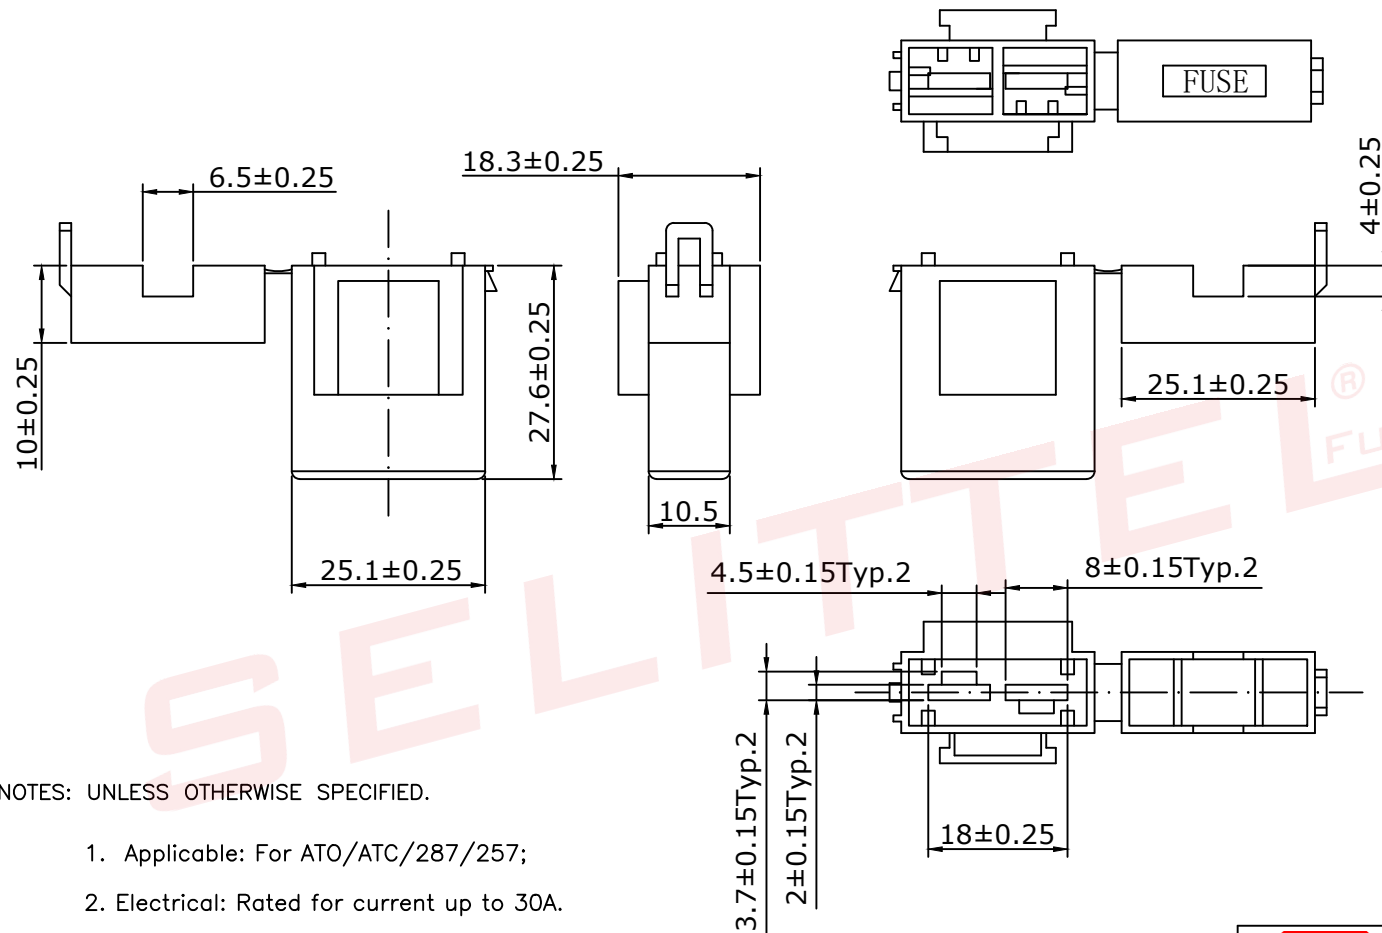

NOTES: UNLESS OTHERWISE SPECIFIED.

1. Applicable: For ATO/ATC/287/257;
2. Electrical: Rated for current up to 30A.
3. Insulating body: PA;
4. Contact: Brass with Tin plated.
5. With other wire sizes or leangths available on special order.
6. Range of wire gauge #14-#20.

		东莞市赛力特保险丝制造有限公司 DONGGUAN SELITTEL FUSES MFG CO., LTD			
ROHS COMPLIANT		Inline Fuseholder			Customer
UNLESS OTHERWISE STATED		For ATO Blade fuse			
WALL THICKNESS					
LINEAR	.X	±0.5	MM		
	.XX	±0.25	MM		
ANGULAR		±0.5	DEG		
DRAFT ANGLE/SIDE		0.5	°MAX		
BURR & FLASH		0.10	MAX		
BREAK CORNERS		0.20	R.MAX		
PARTING LINE MISMATCH		0.05	MAX		
DSGN	Tommy Qiu	07-12-08	SCALE	free	
DFTS	Tommy Qiu	07-12-08	SHEET	1 OF 1	
CHKD			PART NO.		REV
APPD			SL-707A		A

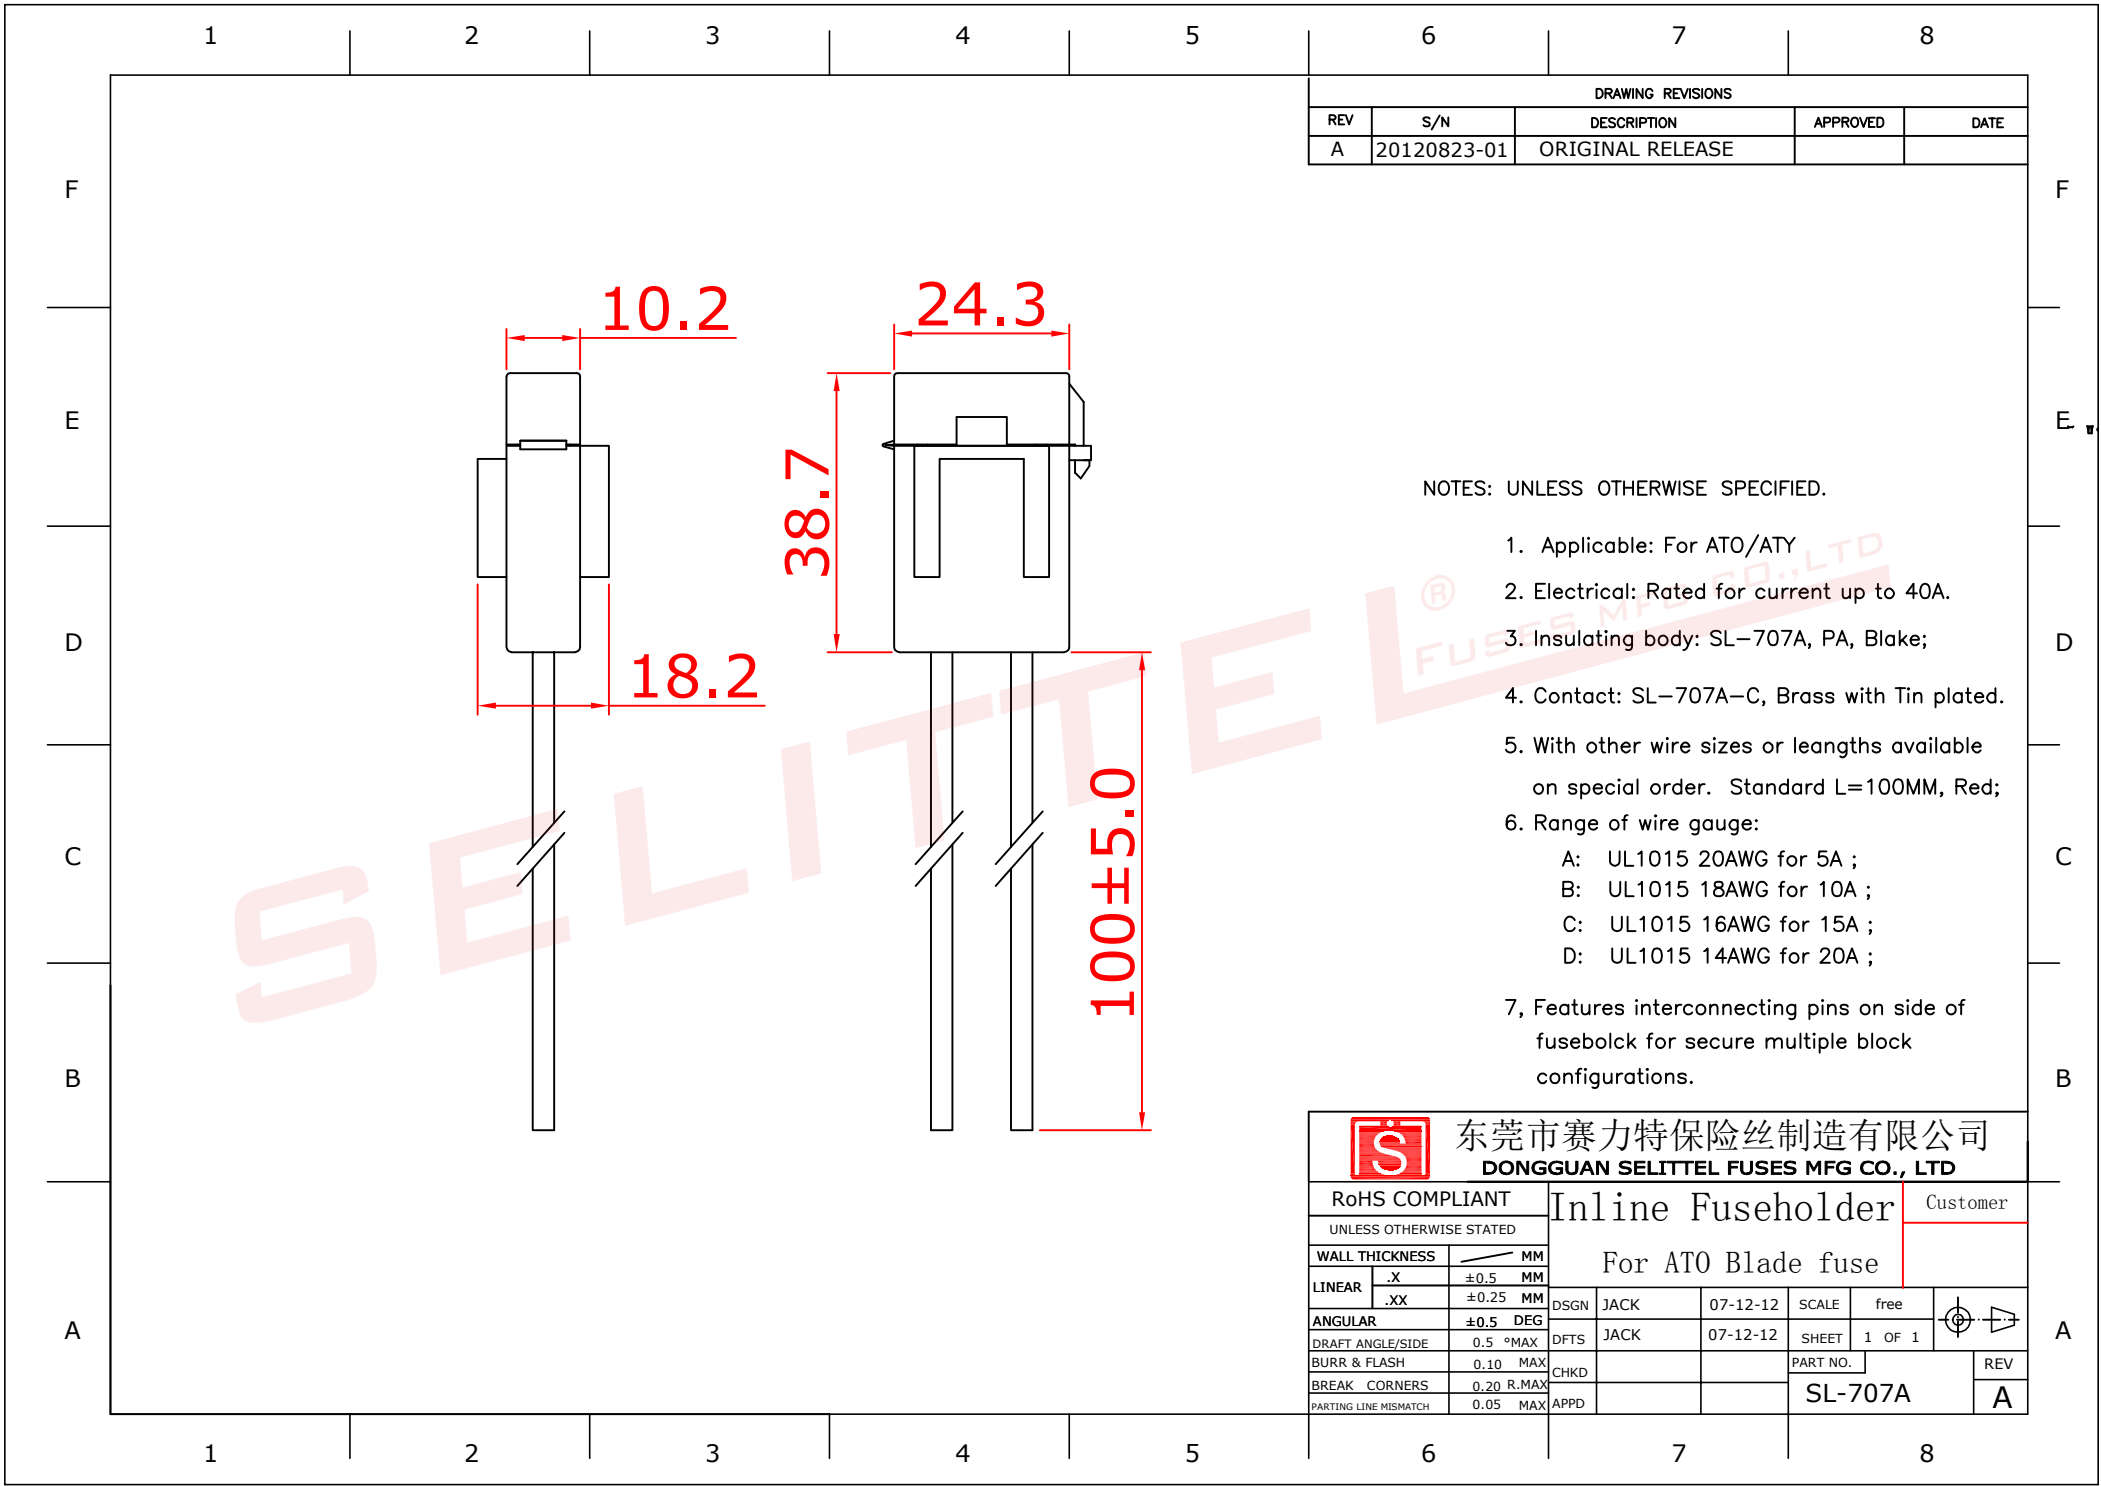

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20120823-01	ORIGINAL RELEASE		

NOTES: UNLESS OTHERWISE SPECIFIED.

- 1. Applicable: For ATO/ATY
- 2. Electrical: Rated for current up to 40A.
- 3. Insulating body: SL-707A, PA, Blake;
- 4. Contact: SL-707A-C, Brass with Tin plated.
- 5. With other wire sizes or leangths available on special order. Standard L=100MM, Red;
- 6. Range of wire gauge:
 - A: UL1015 20AWG for 5A ;
 - B: UL1015 18AWG for 10A ;
 - C: UL1015 16AWG for 15A ;
 - D: UL1015 14AWG for 20A ;
- 7. Features interconnecting pins on side of fusebolck for secure multiple block configurations.

 东莞市赛力特保险丝制造有限公司
DONGGUAN SELITTEL FUSES MFG CO., LTD

RoHS COMPLIANT		Inline Fuseholder		Customer	
UNLESS OTHERWISE STATED		For ATO Blade fuse			
WALL THICKNESS	MM	DSGN	JACK	07-12-12	SCALE free
LINEAR .X	±0.5 MM	DFTS	JACK	07-12-12	SHEET 1 OF 1
LINEAR .XX	±0.25 MM	CHKD			PART NO.
ANGULAR	±0.5 DEG	APPD			REV
DRAFT ANGLE/SIDE	0.5 °MAX				SL-707A
BURR & FLASH	0.10 MAX				A
BREAK CORNERS	0.20 R.MAX				
PARTING LINE MISMATCH	0.05 MAX				